

RCP SERIES ROTARY SWITCH



1. RATING : 30 V DC , 500 mA .
2. CONTACT RESISTANCE : 25 mΩ MAX .
3. INSULATION RESISTANCE : 500 V DC , 100 MΩ MIN .
4. OPERATING TEMPERATURE : -20°C ~ 70°C .
5. OPERATING LIFE : 10,000 CYCLES .
6. TORQUE : 800±500 gcm .

HOW TO ORDER

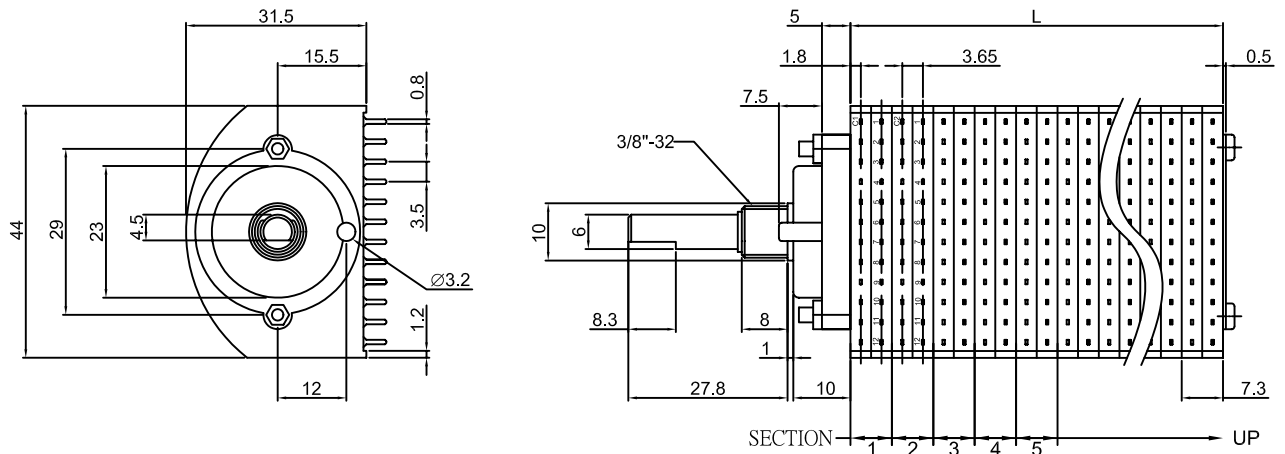
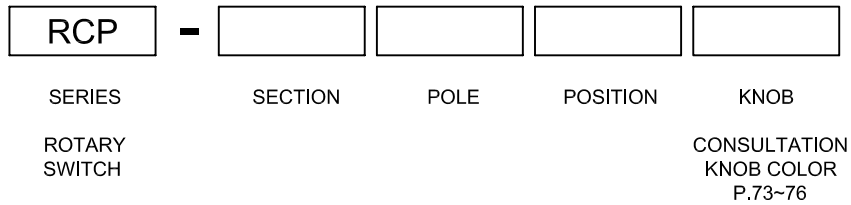


ILLUSTRATION OF MUTI-SECTION SWITCHES' POLE, POSITION & BODY LENGTH(mm)

| SECTION (1~12) | POLE | POSITION (2~12) | L BODY LENGTH | SECTION (1~12) | POLE | POSITION (2~12) | L BODY LENGTH |
|----------------|------|-----------------|---------------|----------------|------|-----------------|---------------|
| 1 | 6 | 2 | 7.3 | 6 | 36 | 2 | 43.8 |
| | 4 | 3 | | | 24 | 3 | |
| | 3 | 4 | | | 28 | 4 | |
| | 2 | 5~6 | | | 12 | 5~6 | |
| | 1 | 7~12 | | | 6 | 7~12 | |
| 2 | 12 | 2 | 14.6 | 7 | 42 | 2 | 51.1 |
| | 8 | 3 | | | 28 | 3 | |
| | 6 | 4 | | | 21 | 4 | |
| | 4 | 5~6 | | | 14 | 5~6 | |
| 3 | 2 | 7~12 | 21.9 | 9 | 7 | 7~12 | 65.7 |
| | 18 | 2 | | | 36 | 3 | |
| | 12 | 3 | | | 27 | 4 | |
| | 9 | 4 | | | 18 | 5~6 | |
| 4 | 6 | 5~6 | 29.2 | 12 | 9 | 7~12 | 87.6 |
| | 3 | 7~12 | | | 36 | 4 | |
| | 24 | 2 | | | 24 | 5~6 | |
| | 16 | 3 | | | 12 | 7~12 | |
| 5 | 9 | 4 | 36.5 | 12 UP | 36 | 2 | - |
| | 8 | 5~6 | | | 24 | 3 | |
| | 4 | 7~12 | | | 12 | 4 | |
| | 30 | 2 | | | | 5~6 | |
| | 20 | 3 | | | | 7~12 | |
| 15 | 4 | | | | | | |
| 10 | 5~6 | | | | | | |
| 5 | 7~12 | | | | | | |