




RJ45 01F Series

Low Profile, Mid-Plane Mounted RJ45,
Single Port built-in with 1G/10G Transformer

KRH-01F Series

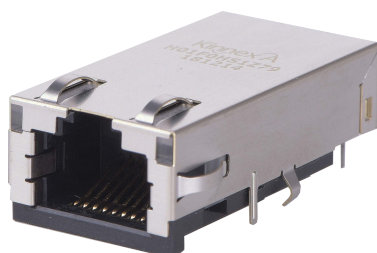

PRODUCT FEATURES:

- Low profile package for OCP NIC 3.0
- Compliant with IEEE 802.3 standard
- Qualified with top 1G/10G PHY manufacturers
- RoHS peak temperature per IPC/JEDEC J-STD-020C
- Fine tuned magnetics to specific PHY vendors

ELECTRICAL SPECIFICATIONS:

ELECTRICAL SPECIFICATIONS @ 25 $\pm$ 5°C --- OPERATING TEMPERATURE 0°C ~ +70°C

PART NUMBER	INSERTION LOSS	RETURN LOSS	CROSS TALK	CM TO CM MODE REJECTION	HI-POT
KRH-01F-0-HS1-Z79-XXX (1G)	- 0.8dB MAX. (0.3 ~ 100MHz) - 1.2dB MAX. (100 ~ 125MHz)	- 20dB MIN. (1 ~ 30MHz) - 16dB MIN. (30 ~ 60MHz) - 12dB MIN. (60 ~ 100MHz)	- 40dB MIN. (1 ~ 10MHz) - 35dB MIN. (30 ~ 60MHz) - 30dB MIN. (60 ~ 100MHz)	- 30dB MIN. (300 ~ 100MHz)	INPUT TO OUTPUT 1500 VAC / 60SEC
KRH-01F-0-SS5-Z79-XXX (10G)	- 0.6dB MAX. (1 ~ 100MHz) - 1.0dB MAX. (100 ~ 200MHz) - 1.5dB MAX. (200 ~ 300MHz) - 2.0dB MAX. (300 ~ 400MHz)	- 20dB MIN. (1 ~ 100MHz) - 17dB MIN. (100 ~ 200MHz) - 14dB MIN. (200 ~ 300MHz) - 13dB MIN. (300 ~ 400MHz) - 12dB MIN. (400 ~ 500MHz)	- 25dB MIN. (1 ~ 500MHz)	- 22dB MIN. (1 ~ 100MHz) - 21dB MIN. (100 ~ 300MHz) - 20dB MIN. (300 ~ 800MHz)	INPUT TO OUTPUT 1500 VAC / 60SEC

DURABILITY TESTING RATING:

RJ45 DURABILITY TESTING RATING

PART NUMBER	MATING FORCE	UMMATING FORCE	DURABILITY	SUGGESTED PEAK WAVE
KRH-01F-0-HS1-Z79-XXX (1G)	4 POUNDS MAX.	4 POUNDS MAX.	750 MATING CYCLED MIN.	SOLDERING CONDITION IS 260°C MAX. / 10 SECONDS MAX.
KRH-01F-0-SS5-Z79-XXX (10G)	4 POUNDS MAX.	4 POUNDS MAX.	750 MATING CYCLED MIN.	SOLDERING CONDITION IS 260°C MAX. / 10 SECONDS MAX.

MATERIAL SPECIFICATION:

RJ45 MATERIAL SPECIFICATION

PART NUMBER	SHIELD		CONTACT		HOUSING	
	MATERIAL	FINISH	MATERIAL	PLATING	MATERIAL	SPECIFICATION
KRH-01F-0-HS1-Z79-XXX (1G)	COPPER ALLOY	NICKEL PLATING	PHOS-BRONZE	50u" GOLD PLATING ON CONTACT AREANICKEL UNDERPLATING OVERALL	HIGH THERMOPLASTIC	UL 94V-0
KRH-01F-0-SS5-Z79-XXX (10G)	COPPER ALLOY	NICKEL PLATING	PHOS-BRONZE	50u" GOLD PLATING ON CONTACT AREANICKEL UNDERPLATING OVERALL	HIGH THERMOPLASTIC	UL 94V-0

Copyright © 2018 KinnexA Inc. All rights reserved.

Connected by **Kinnex A**

8F., No.172, Cheng Teh Road, Sec. 4, Taipei 11167, Taiwan
TEL: +886-2-2883-3199 FAX: +886-2-2882-1818
sales@kinnexa.com www.kinnexa.com




RJ45 01F Series

Low Profile, Mid-Plane Mounted RJ45,
Single Port built-in with 1G/10G Transformer

SCHEMATICS


KRH-01F-0-HS1-Z79-XXX

1G

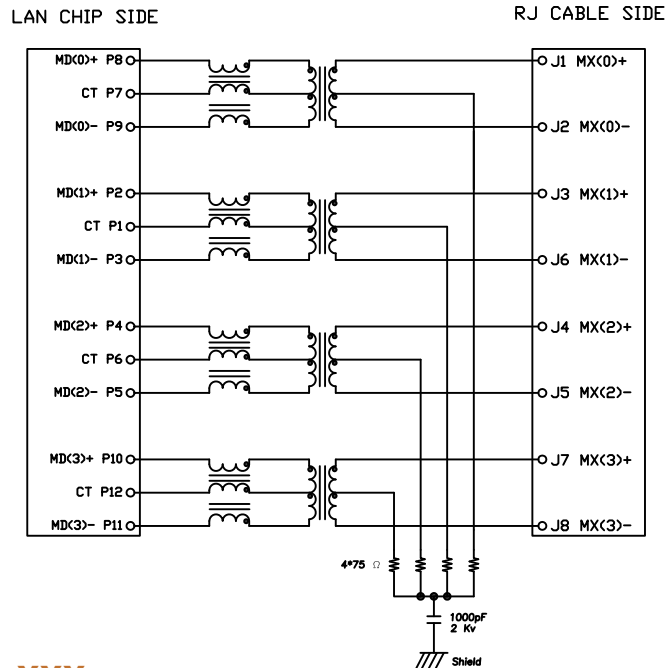

KRH-01F-0-SS5-Z79-XXX

10G

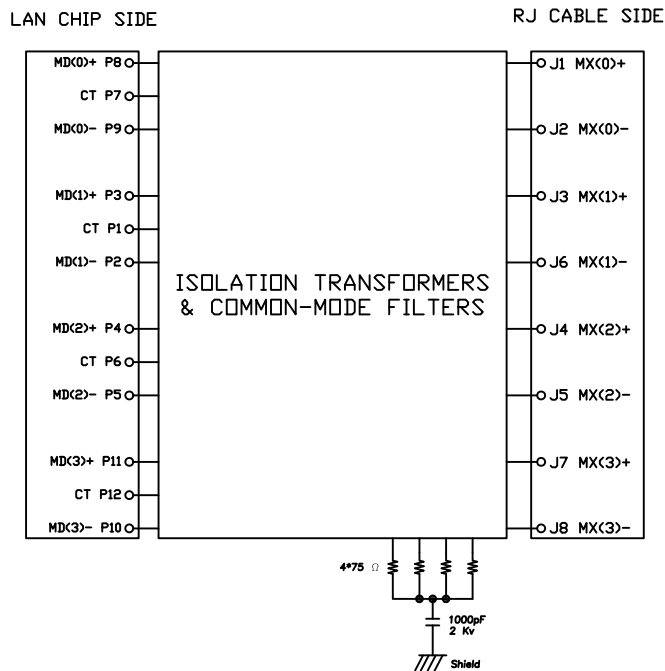

Copyright © 2018 KinnexA Inc. All rights reserved.

Connected by Kinnex A

8F., No.172, Cheng Teh Road, Sec. 4, Taipei 11167, Taiwan
TEL: +886-2-2883-3199 FAX: +886-2-2882-1818
sales@kinnexa.com www.kinnexa.com




RJ45 01F Series

Low Profile, Mid-Plane Mounted RJ45,
Single Port built-in with 1G/10G Transformer

PACKING

KRH-01F-0-HS1-Z79-XXX/ KRH-01F-0-SS5-Z79-XXX

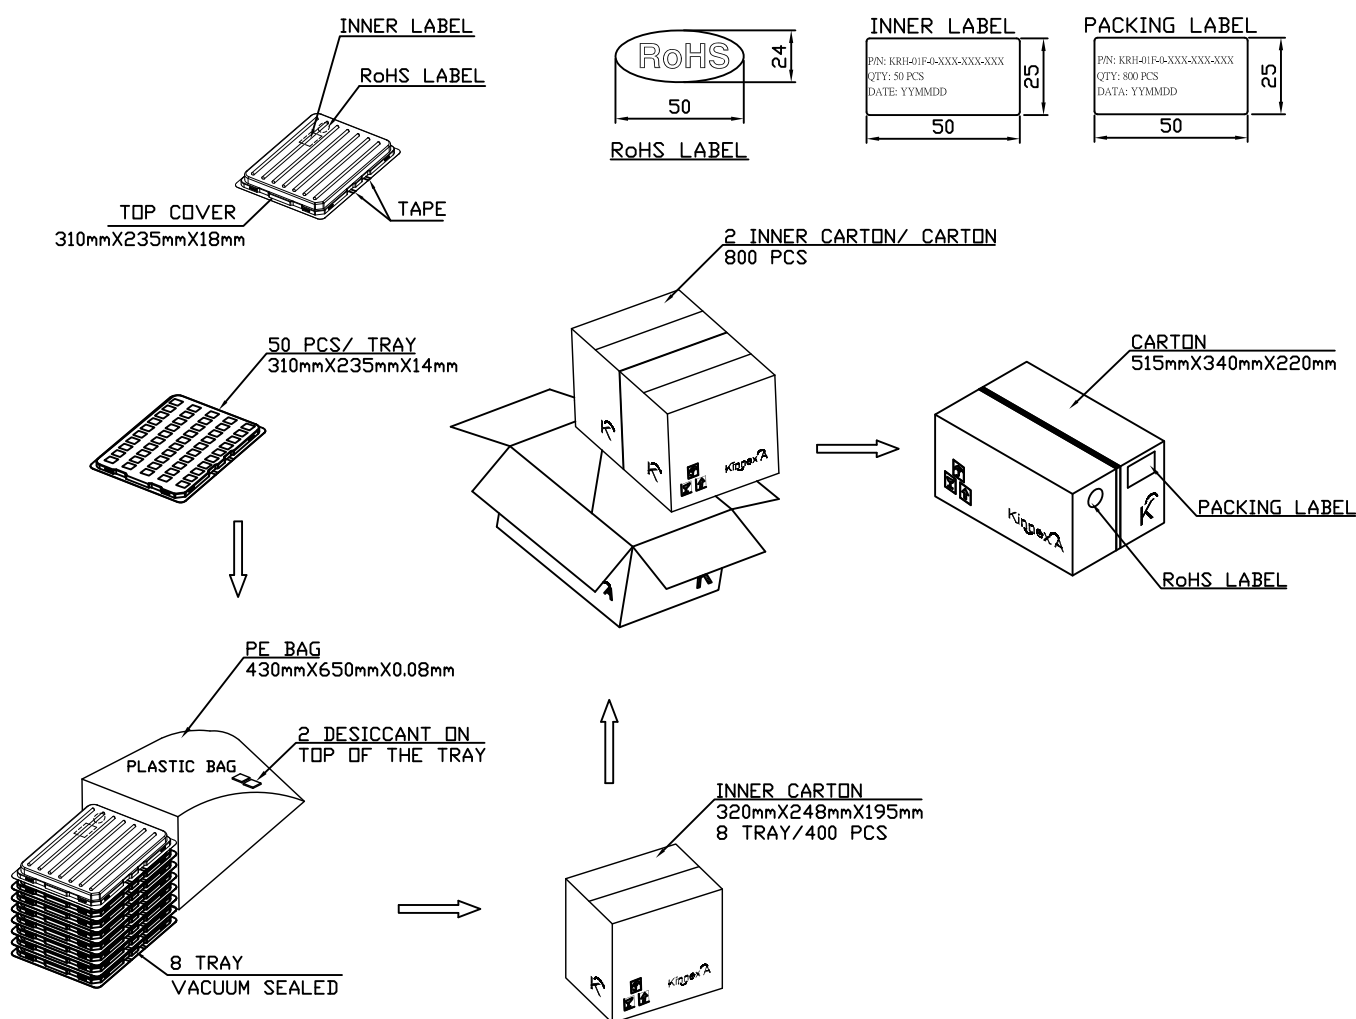

Copyright © 2018 KinnexA Inc. All rights reserved.

Connected by **Kinnex A**

8F., No.172, Cheng Teh Road, Sec. 4, Taipei 11167, Taiwan
TEL: +886-2-2883-3199 FAX: +886-2-2882-1818
sales@kinnexa.com www.kinnexa.com