



THINKING ELECTRONIC INDUSTRIAL CO., LTD.

HEAD OFFICE: 12F, No.93, Dashun 1st Rd., Zuoying Dist., Kaohsiung, Taiwan
TEL: 886-7-5577660 FAX: 886-7-5570560

MANUFACTURING SITE

- ☐ KAOHSIUNG FACTORY: No.6, Xinjian S. Rd., Nanzi Dist., Kaohsiung City 811644, Taiwan
TEL: 886-7-9616668 FAX: 886-7-3866990
- ☐ KAOHSIUNG FACTORY 2: No. 2-2, Xinjian S. Rd., N.E.P.Z., Kaohsiung City 81170, Taiwan
TEL: 886-7-9630001 FAX: 886-7-3635113
- ☒ CHANGZHOU FACTORY: No.6 Longmen Rd., Wujin High & New-Tech Industrial Development Zone, Changzhou, Jiangsu, China 213161
TEL: 86-519-86578999 FAX: 86-519-86558643
- ☐ DONG GUAN FACTORY: No.45, East Rd., Sha-Tao Dist., Chang-An Town, Dongguan City, Guangdong, China 523863
TEL: 86-769-85542016 FAX: 86-769-85546890
- ☐ YICHANG FACTORY: No. 283 Xiaoting Avenue, Xiaoting Dist., Yichang City 443007, Hubei, China
TEL: 86-717-6510010 FAX: 86-717-6511430
- ☐ JIANGXI FACTORY: Tangying Road, Ceramics Industry Garden, Jingdezhen City, Jiangxi, China 333400
TEL: 86-798-2621372 FAX: 86-798-2126372



SPECIFICATION FOR APPROVAL

CUSTOMER	Blume-Kuttig
CERTIFIED	
MODEL/TYPE	KMC5S010
PART NO.	KMC5S010RY001(RoHS+HF)
APPLICATION	
CUSTOMER P/N	
ISSUE DATE	Nov.15.2023
REV. NO.	
REV. DATE	

FOR CUSTOMER APPROVAL	CHECKED BY
	<i>Haili Gong</i>
	APPROVED BY
	<i>Huaifang Zhang</i>





Polymer PTC Resettable Fuse KMC Type

Part No.: KMC5S010RY001

REVISED RECORD SHEET

REV. NO	REV. DATE	REVISED CONTENT




INDEX	Page
■ Part Number Code	1
■ Structure and Dimensions	2
■ Electrical Characteristics	2
■ Reliability	3
■ Soldering Recommendation	4
■ Typical Time-to-Trip Curves at 23°C	5
■ Thermal Derating Curve	5
■ RoHS Compliant Declaration	6
■ Restriction of Weapon and Military End-Use	6
■ Warehouse Storage Conditions of Products	6
■ Safety Approvals	7
■ Certificates	7
■ Packaging	8

Part Number Code

Example :

<u>K</u>	<u>MC</u>	<u>5</u>	<u>S</u>	<u>010</u>	<u>R</u>	<u>Y001</u>
(1)	(2)	(3)	(4)	(5)	(6)	(7)

No.	Item	Digit	Specification
(1)	Product Type	K	Thinking Polymer PTC Resettable Fuse
(2)	Type Series	MC	SMD series
(3)	Size (EIA)	5	1812
(4)	Structure	S	S type
(5)	I hold	010	0.10A @ 23℃
(6)	Packaging	R	Taping & Reel
(7)	Optional Suffix	Y001	RoHS+HF compliance Vmax:60V I _{max} :40A Rmin:0.7Ω

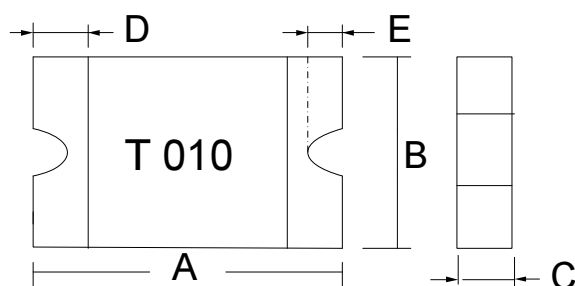Structure and Dimensions

(unit : mm)

Item	A	B	C	D	E
MIN.	4.37	3.07	0.50	0.20	0.15
MAX.	4.73	3.41	0.90	1.20	0.65

Electrical Characteristics (23 °C)

Part No.	V max.	I max.	I hold @ 23°C	I trip @ 23°C	Pd (Max.)
	(V)	(A)	(A)	(A)	(W)
KMC5S010RY001	60	40	0.100	0.300	0.80

Part No.	Max.time to trip		Resistance (Ω)		Operating /storage temperature
			Initial (Ri)	Post trip (R1)	
	(A)	(Sec.)	min.	max.	(°C)
KMC5S010RY001	0.5	1.50	0.7	15.0	-40 ~ +85

Ihold=Hold current :maximum current device will pass without interruption at 23°C still air unless otherwise specified.

Itrip=Trip current :minimum current that will switch the device from low resistance to high resistance at 23°C still air unless otherwise specified.

Vmax=Maximum voltage device can withstand without damage at rated current.

Imax=Maximum current device can withstand without damage at rated voltage .

Pd=Power dissipated from device while the tripped state at 23°C still air unless otherwise specified.

Rimin=Minimum resistance of device prior to tripping at 23°C .

R1max=Maximum resistance of the device one hour after tripping at 23°C .


Caution:Operation beyond the specified rating or improper use may result in damage and possible arcing and flame.

Reliability

Item	Standard	Test conditions/Methods	Specifications
Passive Aging	IEC60738-1	85±5℃, 1000±24hrs	±10% typical resistance change
Humidity Aging	Specification Standard	85±5℃, 80~85%RH, 100±5hrs	±5% typical resistance change
Rapid Change of Temperature	IEC60738-1	85±5/-40±5℃, 20 cycles Duration:30min	-33% typical resistance change
Overload Endurance	UL1434	Vmax,120% Imax ,50 cycles + Vmax,300% Itrip ,6000 cycles	No arcing or burning
Aging	UL1434	Vmax, Itrip ≤ I ≤ Imax , 1000±24hrs	No arcing or burning
Solderability	IEC60068-2-58	245 ± 5 ℃ , 3 ± 0.3 sec	At least 95% of terminal electrode is covered by new solder

Soldering Recommendation

■ IR-Reflow Soldering Profile

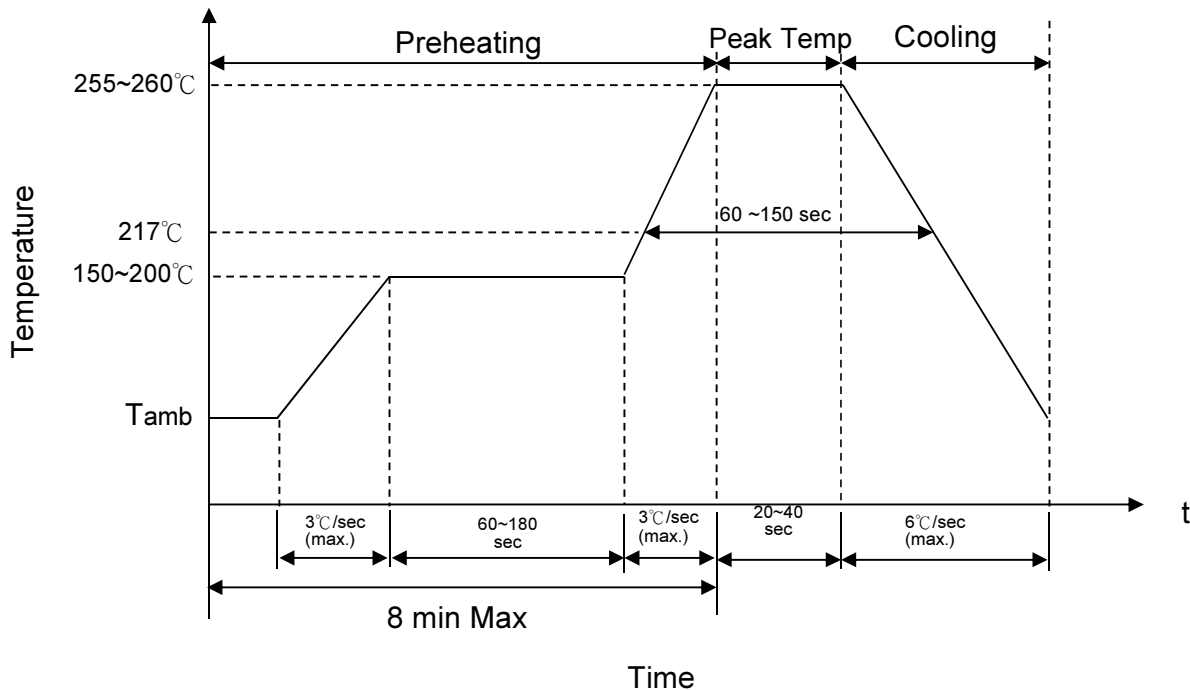

The welding method of the product is reflow welding, wave soldering is not recommended

* Recommended reflow methods: IR, Vapor phase, hot air oven.

* Devices can be cleaned using standard industry methods and solvents.

Notes:


If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Devices are not designed to be wave soldered to the bottom side of the board.

■ Recommended Reworking Conditions with Soldering Iron


Item	Conditions
Temperature of Soldering Iron-tip	360 °C (max.)
Soldering Time	3 sec (max.)
Diameter of Soldering Iron-tip	φ 3 mm (max.)

■ Recommended Soldering Pad Dimensions (Nominal)




(Unit : mm)

SIZE	A	B	C
1812	3.45	1.78	3.50

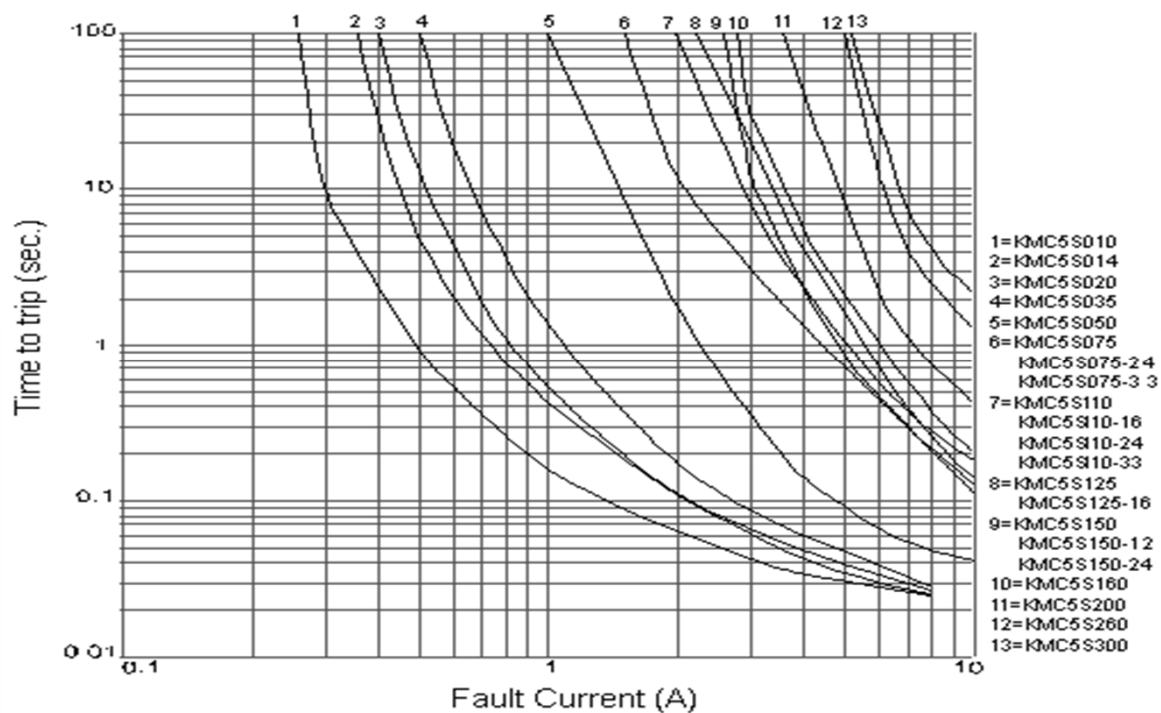Typical Time- to-Trip Curves at 23 °CThermal Derating Curve

Thermal derating curve for SMD1812 series

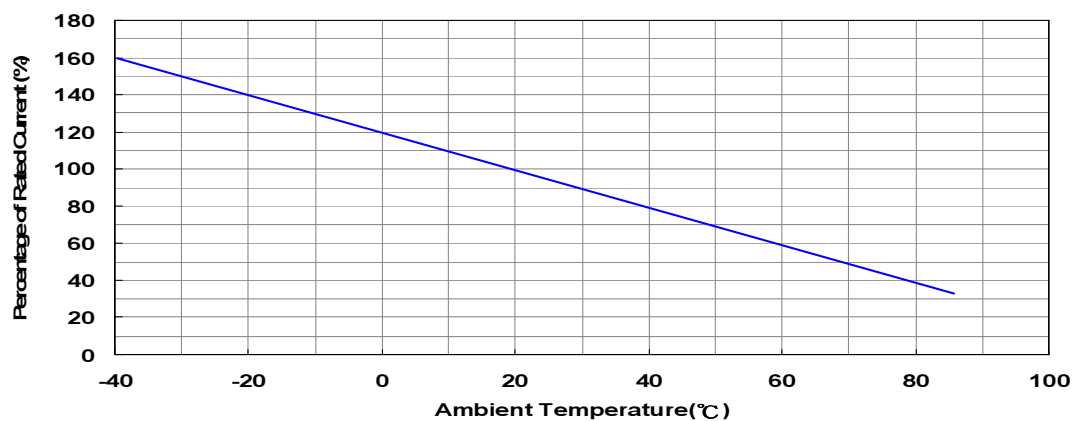

Model	Ambient Operation Temperature								
	-40°C	-20°C	0°C	23°C	40°C	50°C	60°C	70°C	85°C
KMC5S010	0.16	0.14	0.12	0.1	0.08	0.07	0.06	0.05	0.03

RoHS Compliant Declaration

We hereby declare that the components delivered to your company are compliant with RoHS directive 2015/863/EU.

Restriction of Weapon and Military End-Use

Thinking has established and implemented the fundamental policy on none of our product should be used or sold, through any channels, for use in the design, development, production, utilization, maintenance or operation of, or otherwise contribution to any weapons (Weapons of Mass Destruction [nuclear, chemical or biological weapons or missiles] or conventional weapons) or goods or systems specially designed or intended for military end-use or utilization by military end-users.

Warehouse Storage Conditions of Products

(I) Storage Conditions :

- 1.Storage Temperature : $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
- 2.Relative Humidity : $\leq 75\% \text{RH}$
- 3.Keep away from corrosive atmosphere and sunlight.

(II) Period of Storage : 1 year

Safety Approvals (Certified Model/Type : KMC5S010)



* UL 1434 / cUL recognized (File # E138827)



* TUV recognized (File # R50143386)

Certificates


- (1) IATF 16949 certificate
- (2) ISO 9001 certificate

Test Report

- (1) RoHS test report
- (2) Halogen-free test report

Packaging

■ Taping specification (1812 type)

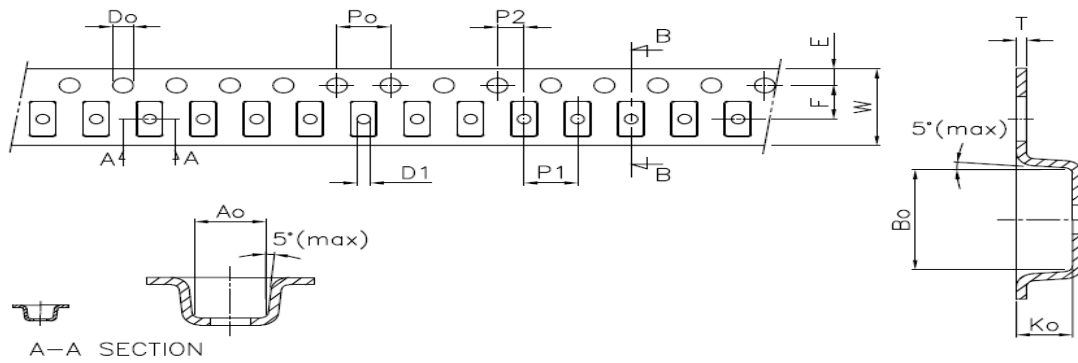

Unit : mm

Index Type	A ₀	B ₀	K ₀	P ₀	P ₁	P ₂	T	E	F	D ₀	D ₁	W	10P ₀
1812	±0.1	±0.1	±0.05	±0.1	±0.1	±0.1	±0.03	±0.1	±0.1	±0.05	min	±0.3	±0.2

■ Quantity (2000 pcs / reel)

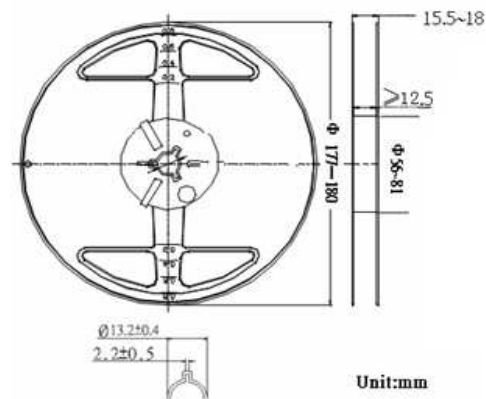


图 2