

This product is completed the lead-free and RoHS.



DATA SHEET

Date : 2024. 02. 02.





Drawing No. : SC-ARM591

Aluminum Electrolytic Capacitors

Type-name : HL

Part No : HL 2G 337 M 25045 HA

Dimensions(mm)

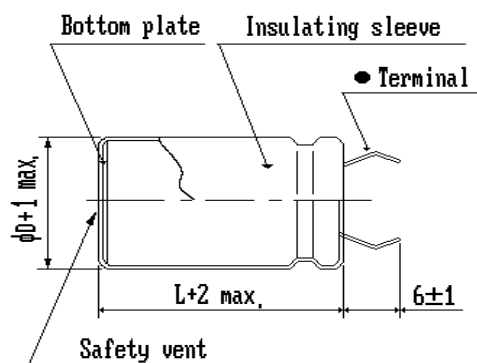

ΦD	25.4
L	45

Dimensions of ΦD & L

Rated Voltage	400 V
Capacitance at 120Hz, 20℃	330 μF
Tolerance at 120Hz, 20℃	-20~+20 %
Surge Voltage	450 V
Ripple current at 120Hz, 105℃	1.80 A rms
Leakage current after 5 minute	1090.0 μA
Equivalent series resistance(E.S.R) at 120Hz , 20℃	0.60 Ω
Dissipation factor (tan δ) at 120Hz , 20℃	0.15
Temperature range	-25 ~ +105℃
Load life at 105℃	5000 hours
Shelf life at 105℃	1000 hours

Approved

K. C. Eom

K. C. Eom

Technical team manager



SAMWHA ELECTRIC CO., LTD.