

Series6L



SURFACE MOUNT PACKAGE FOR TUNING FORK CRYSTAL



Approved by:
Checked by:
Issued by:

SPECIFICATION

P/N: 6LC32768001MBL

深 圳 市 晶 科 鑫 实 业 有 限 公 司

SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD.

Tel: 86-755-88352809

Fax: 86-755-88353718

E-mail: sjksale@126.com

URL: [Http://www.q-crystal.com](http://www.q-crystal.com)

Series6L

SURFACE MOUNT PACKAGE FOR TUNING FORK CRYSTAL

FEATURE

- Wide Frequency range
- Small size
- Tape & Reel
- Reflow available

APPLICATIONS


- Microprocessor Systems
- Consumer Electronics

ELECTRICAL SPECIFICATIONS

Frequency	32.768KHz
Frequency Tolerance (at 25°C)	±20ppm
ESR	40Kohm Max
Turnover Temperature	25 ± 5°C
Frequency Temperature Curve	-0.034(±0.006)ppm/°C ²
Storage Temperature Range	-55 °C to +125 °C
Operable Temperature Range	-40 °C to + 85 °C
Shunt Capacitance (C0)	1.3pF Typ
Dynamic Capacitance (C1)	2.4fF Typ
Driver Level (Typical)	1 μW Max
Load Capacitance (CL)	12.5pF
Aging @25°C 1 st year (Max)	±3ppm/year

REMARK: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. PLEASE CONFIRM WITH OUR SALES ENGINEER.


Frequency VS Temperature Curve

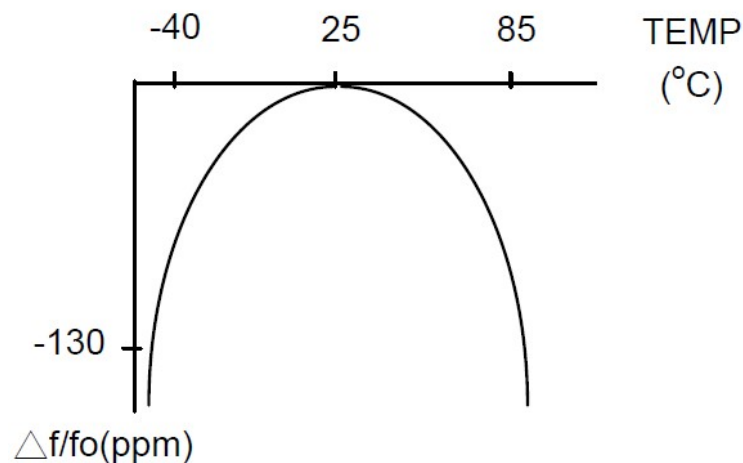

Series6L

SURFACE MOUNT PACKAGE FOR TUNING FORK CRYSTAL

Dimensions (Unit: mm)

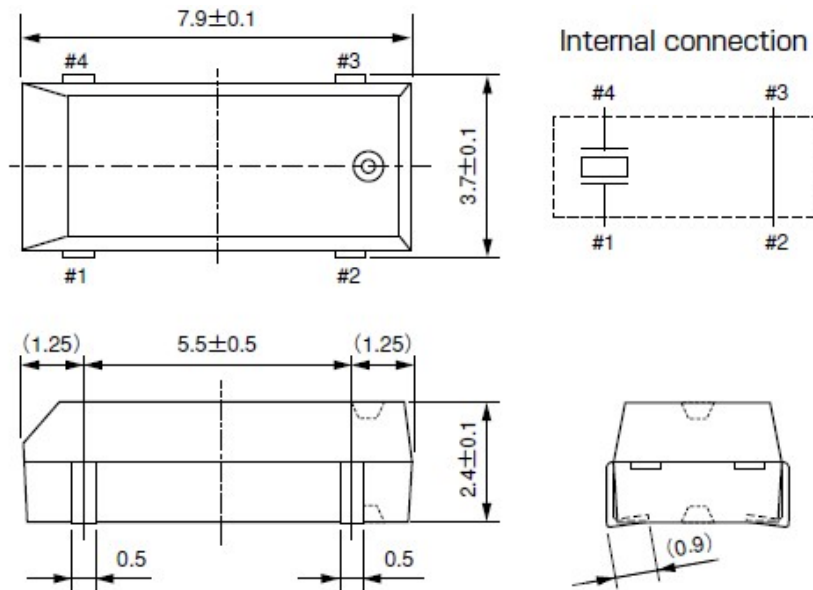


* Do not connect to external with #2 and #3

Reflow Soldering Profile


Total Time: 200 sec. Max.

Solder Melting Point :220 °C

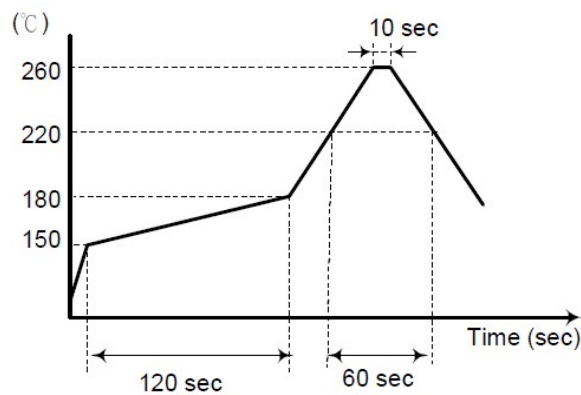

Packing (Tape & Reel)

Reel for 206A/206B/308C

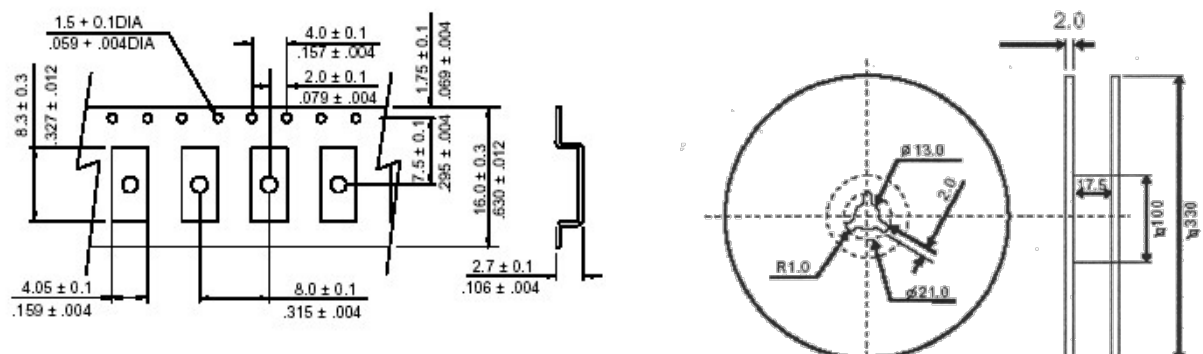

The design, manufacturing process, and specifications of this device are subject to change without notice.