


Features

- $\pm 10\text{ppm}/\pm 10\text{ppm}$ (Tolerance/Stability) Available
- Ultra-Miniature Package
- AT-Cut Fundamental
- Tape and Reel


Applications

- Office Automation
- Audio/Visual Bluetooth
- Small Communication Devices
- SSD
- USB



Part Numbering Guide


SXT 21 4 18 A A 48 - 25.000M

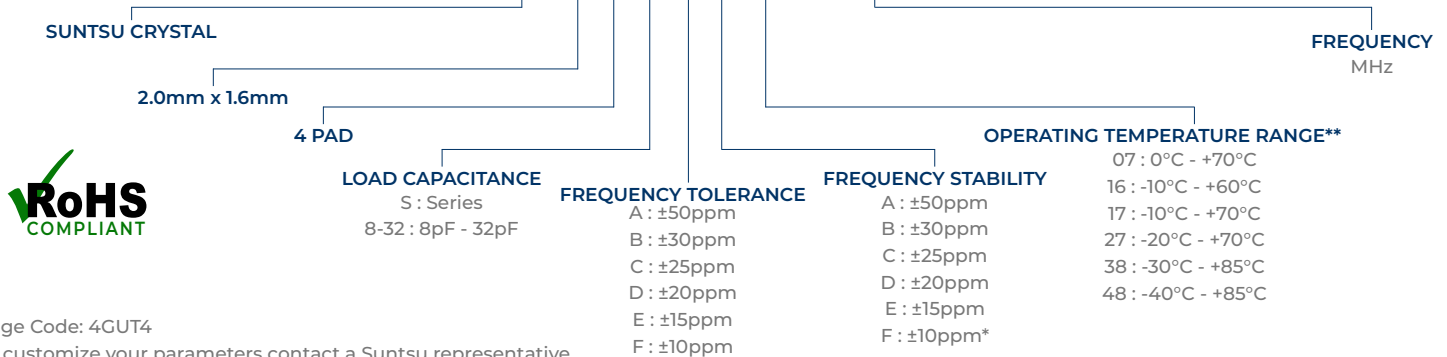

Electrical Parameters	Units	Minimum	Typical	Maximum	Remarks
Frequency Range	MHz	16		60	AT-Cut Fundamental.
Frequency Tolerance at +25°C	ppm	-10		+10	See part numbering guide for options.
Frequency Stability vs. Op Temp	ppm	-10		+10	See part numbering guide for options.
Frequency Stability vs. Aging	ppm	-2		+2	First year @ +25°C.
Operating Temperature	°C	-40		+85	See part numbering guide for options.
Storage Temperature	°C	-40		+125	
Load Capacitance	pF	8		16	See part numbering guide for options.
Shunt Capacitance	pF			5	
Drive Level	μW		50	100	
Insulation Resistance	MΩ	500			@ 100VDC ± 15V.
16.000MHz ~ 20.999MHz	Ω			200	AT-Cut Fundamental
ESR - 21.000MHz ~ 25.999MHz	Ω			120	AT-Cut Fundamental
26.000MHz ~ 40.999MHz	Ω			100	AT-Cut Fundamental
41.000MHz ~ 60.000MHz	Ω			60	AT-Cut Fundamental


Outline Drawing & Recommended Landed Pattern

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

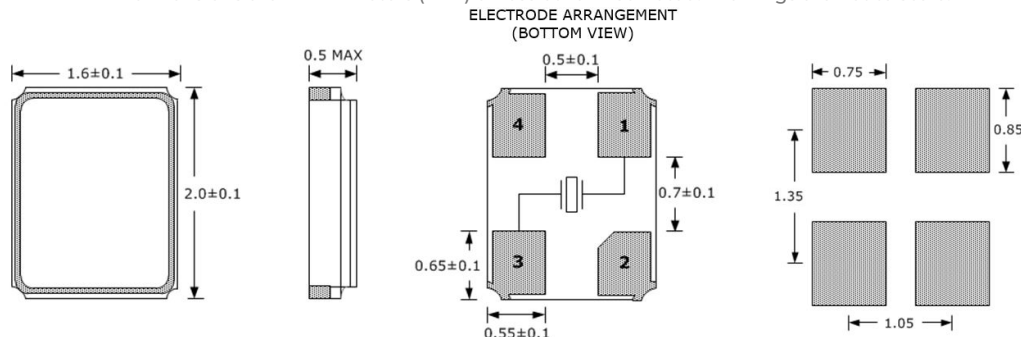

Environmental Specifications		Mechanical Specifications	
Temperature Cycling	MIL-STD-883, Method 1010, Condition B	Mechanical Shock	MIL-STD-202, Method 213, Condition B
Fine Leak Test	MIL-STD-883, Method 1014, Condition A	Vibration	MIL-STD-883, Method 2007, Condition A
Gross Leak Test	MIL-STD-883, Method 1014, Condition C	Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition K
Moisture Resistance	MIL-STD-883, Method 1004	Resistance to Solvents	MIL-STD-202, Method 215
Moisture Sensitivity	J-STD-020, MSL 1	Solderability	MIL-STD-883, Method 2003

Reflow Profile & Part Marking

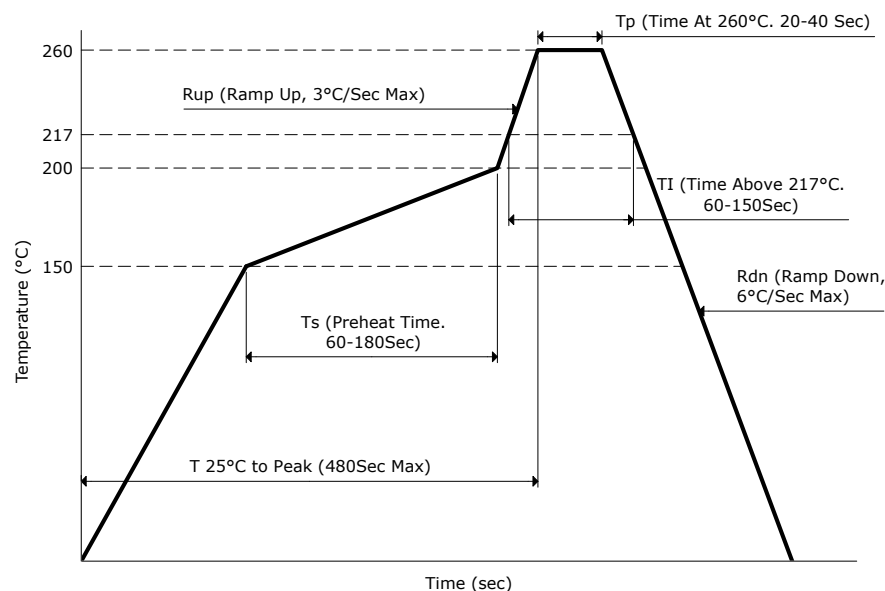

Frequency in MHz

Line 1: X X.X X X

Line 2: S F Y W W

Suntsu Manufacturing Identifier

Week Year

Tape And Reel Dimensions

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

3,000pcs / Reel

