

Specification for Approval

Date: 2024/08/22Customer : BlumeTAI-TECH P/N: TMIM201610AV-4R7MG

CUSTOMER P/N: _____

DESCRIPTION: _____

QUANTITY: _____ pcs

REMARK:

Customer Approval Feedback

- ☐ 西北臺慶科技股份有限公司
TAI-TECH Advanced Electronics Co., Ltd
Headquarter:
NO.1 YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI,
TAO-YUAN HSIEN, TAIWAN, R.O.C.
TEL: +886-3-4641148 FAX: +886-3-4643565
<http://www.tai-tech.com.tw>
E-mail: sales@tai-tech.com.tw
- ☐ 臺慶精密電子(昆山)有限公司
TAI-TECH ADVANCED ELECTRONICS(KUNSHAN) CO., LTD
SHINWHA ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN,
JIANG-SU, CHINA
TEL: +86-512-57619396 FAX: +86-512-57619688
E-mail: sales@tai-tech.cn
- ☒ 慶邦電子元器件(泗洪)有限公司
TAIPAQ ELECTRONICS(SIHONG) CO., LTD
THESOUTH HANGZHOU ROAD AND THE EAST JIANSHEBEI ROAD,
ECONOMIC DEVELOPMENT ZONE, SIHONG COUNTY, JIANGSU
PROVINCE, P. R, CHINA
TEL: +86-527-88601191 FAX: +86-527-88601190
E-mail: sales@taipaq.cn

Sales Dep.

APPROVED	CHECKED
Gary	Gary

R&D Center

APPROVED	CHECKED	DRAWN
Sky Luo	Mr.Liang	Tang pingping

SMD Power Inductor

TMIM201610AV-4R7MG

ECN HISTORY LIST					
REV	DATE	DESCRIPTION	APPROVED	CHECKED	DRAWN
1.0	24/08/22	New Issue	Sky Luo	Mr.Liang	Tang pingping
備 注					

SMD Power Inductor

1. Features

1. Low loss realized with low DCR.
2. High performance realized by metal dust core.
3. Ultra low buzz noise, due to composite construction.
4. 100% Lead(Pb)-Free and RoHS compliant.
5. High reliability -Reliability test complied with AEC-Q200.




AEC-Q200



2. Applications

Automotive applications.


3. Dimensions

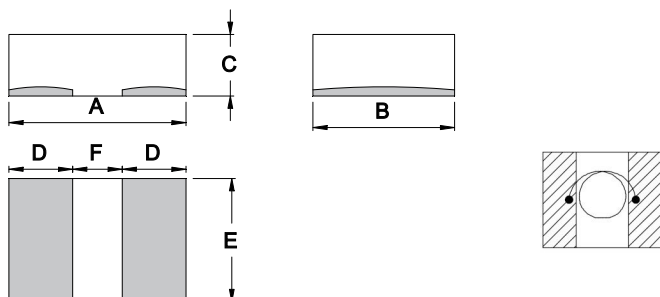

A	B	C	D	E	F
2.0 ± 0.3	1.6 ± 0.3	0.8 ± 0.2	0.7 ± 0.3	1.6 ± 0.3	0.6Min

Unit: mm

Recommend PC Board Pattern



L	G	H
2.5	0.5	1.9

Note:

1. PCB layout is referred to standard IPC-7351B.
2. The above PCB layout reference only.
3. Recommend solder paste thickness at 0.10mm and above.

4. Part Numbering

TMIM	201610	AV	-	4R7	MG
A	B	C		D	E

A: Series

B: Dimension

C: Material

D: Inductance

E: Inductance Tolerance

AxBxC

4R7=4.70uH

M=±20%, G: Coating


5. Specification

Part Number	Inductance (uH) $\pm 20\%$ @ 0 A DC	Irms (A)		Isat (A)		DCR (mΩ)	
		Typ	Max	Typ	Max	Typ	Max
TMIM201610AV-4R7MG	4.70	1.4	1.2	2.1	1.9	265.0	318.0

Note:

1. Test frequency : L_s : 100KHz /1.0V.
2. All test data referenced to 25°C ambient.
3. Testing Instrument(equ.) : Agilent 4284A, E4991A, 4339B, KEYSIGHT E4980A/AL, chroma3302, 3250, 16502.
4. Heat Rated current (Irms) will cause the coil temperature rise approximately ΔT of 40°C.
5. Saturation current (Isat) will cause L0 to drop approximately 30%.
6. The part temperature (ambient + temp rise) should not exceed 150°C under worst case operating conditions. Circuit design, component, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
7. Irms Testing : temperature rise is highly dependent on many factors including pcb land pattern, trace size, and proximity to other components. Therefore temperature rise should be verified in application conditions.
8. Rated DC current: The lower value of Irms and Isat.
9. Rated voltage 25V DC, the application of voltage depends on many factors, over voltage may cause components failure、high temperature、and burn-out, user needs to verify for appropriate usage


6. Material List



NO	Items	Materials
1	Core	Metal Powder.
2	Wire	Polyester Wire.
3	paint	Epoxy resin.
4	Terminal	Plating.


7. Packaging Information

7-1. Reel Dimension

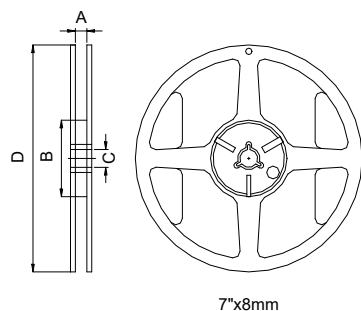

Type	A(mm)	B(mm)	C(mm)	D(mm)
7" x8mm	8.4+1.5/-0.0	60±1.0	13+0.5/-0.2	178±2.0

7-2. Tape Dimension

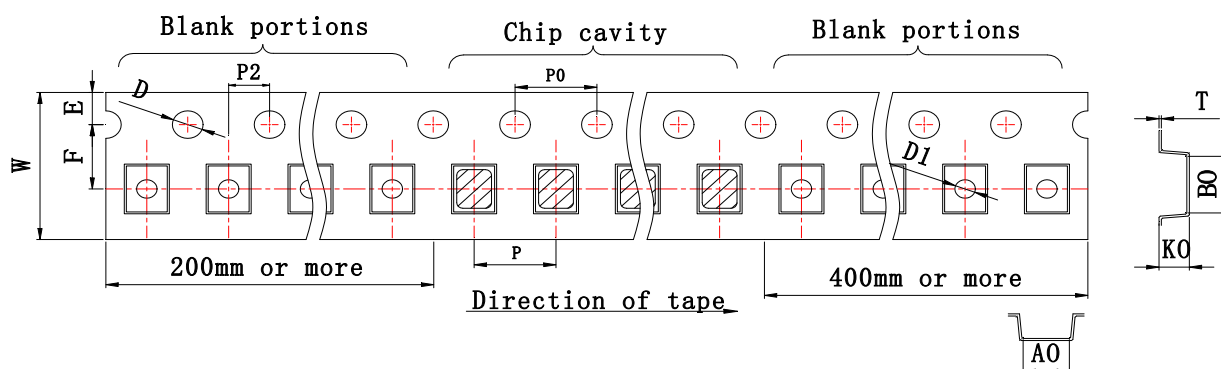


B0	A0	K0	W	P	P0	P2	E	F	T	D	D1
2.5±0.1	2.0±0.1	1.2±0.1	8.0±0.1	4.0±0.1	4.0±0.1	2.0±0.1	1.75±0.1	3.5±0.1	0.23±0.05	1.5+0.1/-0.0	1.0±0.1

Unit: mm

7-3. Packaging Quantity

TMIM	201610
Pcs/Reel	2000

7-4. Tearing Off Force

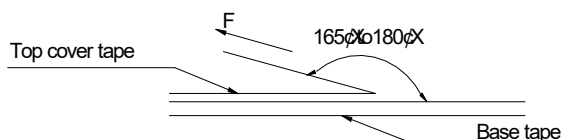



The force for tearing off cover tape is 10 to 100 grams in the arrow direction under the following conditions(referenced ANSI/EIA-481-D-2008 of 4.11 standard).

Tearing Speed mm	Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)
300±10	5~35	45~85	860~1060

8. Reliability and Test Condition

Item		Performance	Test Condition																												
Operating temperature		-55~+150℃(Including self - temperature rise)	NA																												
Storage temperature and Humidity range		1. -10~+40℃, 50~60%RH (Product with taping) 2. -55~+150℃(on board)	NA																												
Electrical Performance Test																															
Inductance		Refer to standard electrical characteristics list.	HP4284A, CH11025, CH3302, CH1320, CH1320S LCR Meter.																												
DCR			CH16502, Agilent33420A Micro-Ohm Meter.																												
Saturation Current (Isat)		Approximately ΔL30%	Saturation DC Current (Isat) will cause L0 to drop ΔL(%).																												
Heat Rated Current (Irms)		Approximately ΔT40℃	Heat Rated Current (Irms) will cause the coil temperature rise ΔT(℃). 1. Applied the allowed DC current. 2. Temperature measured by digital surface thermometer.																												
Reliability Test (For AEC-Q200-E)																															
8.1	Pre- and Post-Stress Electrical Test	User Specification	Test is performed at room temperature except as specified in the applicable stress reference and the additional requirements in this Table (e.g. 8.3, 8.4, 8.5). Preconditioning : run through reflow for 3 times. (IPC/JEDECJ-STD-020F Classification Reflow Profiles)																												
8.2	High Temperature Exposure(Storage) Reference MIL-STD-202 Method 108	Appearance : no damage. Inductance : within± 10% of initial value DCR : within± 15% of initial value and shall not exceed the specification value.	Unpowered , Temperature : 150±2℃ Upper Temperature: maximum specified operating temperature or maximum specified storage temperature (whichever is higher). Duration : 1000hrs Min. Measured at room temperature after placing for 24±4 hrs.																												
8.3	Temperature Cycling Reference JESD22-A104		Conduct Temperature Cycling testing on the product after performing the Pre- and Post-Stress Electrical Tests as specified in section 8.1 Unpowered Lower Temperature of the Chamber: -40℃(For Inductors/Transformers) Upper Temperature of the Chamber: maximum specified operating temperature and shall not exceed 125℃ Condition for 1 cycle Step1 : -40±2℃ 30min Min. Step2 : 125±2℃ transition time 1min MAX Step3 : 125±2℃ 30min Min. Step4 : Dwell Time (Soak Time) 15 minutes minimum, 30 minutes minimum if component weighs above 28g Transition Time : 1 minute maximum Number of cycles : 1000 Measured at room temperature at least 24 hours after test conclusion.																												
8.4	Humidity Bias Reference MIL-STD-202 Method 103		Conduct Humidity Bias testing on the product after performing the Pre- and Post-Stress Electrical Tests as specified in section 8.1 Unpowered(For Inductors/Transformers) Humidity : 85±3% R.H. Temperature : 85℃±2℃ Duration : 1000hrs Min. Measured at room temperature after placing for 24±4hrs.																												
8.5	High Temperature Operating Life Reference MIL-STD-202 Method 108		Conduct High Temperature Operating Life testing on the product after performing the Pre- and Post-Stress Electrical Tests as specified in section 8.1 Temperature : 110±2℃ Upper Temperature of the Chamber: maximum specified operating temperature (not including heat rise) at maximum rated power and shall not exceed 125℃. (For Inductors/Transformers) Duration : 1000hrs Min. with 100% rated current. Measured at room temperature after placing for 24±4 hrs.																												
8.6	External Visual Reference MIL-STD-883 Method 2009		Inspect device construction, marking and workmanship. Pre and Post Electrical Test not required.																												
8.7	Physical Dimension Reference JESD22-B100	According to the product specification size measurement.	Verify physical dimensions to the applicable component detail specification. Pre and Post Electrical Test not required.																												
8.8	Terminal Strength (for axial and radial THT components) Reference MIL-STD-202 Method 211	Appearance : no damage. Inductance : within± 10% of initial value DCR : within± 15% of initial value and shall not exceed the specification value.	Test THT component lead integrity only. Test Condition A (pull test) <table><tr><th>Nominal cross- sectional area(mm²)</th><th>Force (N)</th></tr><tr><td>≤0.05</td><td>1</td></tr><tr><td>0.06 to 0.10</td><td>2.5</td></tr><tr><td>0.11 to 0.20</td><td>5</td></tr><tr><td>0.21 to 0.50</td><td>10</td></tr><tr><td>0.51 to 1.20</td><td>20</td></tr><tr><td>≥1.20</td><td>40</td></tr></table> Test Condition C (wire-lead bend test) : <table><tr><th>Section Modulus (Zx) (mm³)</th><th>Force (N)</th></tr><tr><td>≤1.5x10⁻³</td><td>0.5</td></tr><tr><td>1.6x10⁻³ to 4.2x10⁻³</td><td>1.25</td></tr><tr><td>4.3x10⁻³ to 1.2x10⁻²</td><td>2.5</td></tr><tr><td>1.3x10⁻² to 0.5x10⁻¹</td><td>5</td></tr><tr><td>0.6x10⁻¹ to 1.9x10⁻¹</td><td>10</td></tr><tr><td>> 1.9x10⁻¹</td><td>20</td></tr></table> For round terminations : ZX = (πd³)/32 where d is the lead diameter. For strip terminations : ZX = (ba²)/6 where a is the thickness of the rectangular strip perpendicular to the bending axis, b is the other dimension of the rectangular strip	Nominal cross- sectional area(mm²)	Force (N)	≤0.05	1	0.06 to 0.10	2.5	0.11 to 0.20	5	0.21 to 0.50	10	0.51 to 1.20	20	≥1.20	40	Section Modulus (Zx) (mm³)	Force (N)	≤1.5x10 ⁻³	0.5	1.6x10 ⁻³ to 4.2x10 ⁻³	1.25	4.3x10 ⁻³ to 1.2x10 ⁻²	2.5	1.3x10 ⁻² to 0.5x10 ⁻¹	5	0.6x10 ⁻¹ to 1.9x10 ⁻¹	10	> 1.9x10 ⁻¹	20
Nominal cross- sectional area(mm²)	Force (N)																														
≤0.05	1																														
0.06 to 0.10	2.5																														
0.11 to 0.20	5																														
0.21 to 0.50	10																														
0.51 to 1.20	20																														
≥1.20	40																														
Section Modulus (Zx) (mm³)	Force (N)																														
≤1.5x10 ⁻³	0.5																														
1.6x10 ⁻³ to 4.2x10 ⁻³	1.25																														
4.3x10 ⁻³ to 1.2x10 ⁻²	2.5																														
1.3x10 ⁻² to 0.5x10 ⁻¹	5																														
0.6x10 ⁻¹ to 1.9x10 ⁻¹	10																														
> 1.9x10 ⁻¹	20																														

Item		Performance	Test Condition																																													
8.9	Resistance to Solvents Reference MIL-STD-202 Method 215	Appearance : no damage. Inductance : within $\pm 10\%$ of initial value DCR : within $\pm 15\%$ of initial value and shall not exceed the specification value.	Add an Aqueous wash chemical and follow chemical manufacturer's recommended parameters (i.e. solution temperature and immersion time). Applicable to ink marked components and not laser marked components																																													
8.10	Mechanical Shock Reference MIL-STD-202 Method 213		<table><tr><th>Type</th><th>Peak value (g's)</th><th>Normal duration (D) (ms)</th><th>Wave form</th><th>Velocity change (Vi)ft/sec</th></tr><tr><td>SMD</td><td>100</td><td>6</td><td>Half-sine</td><td>12.3</td></tr><tr><td>THT</td><td>100</td><td>6</td><td>Half-sine</td><td>12.3</td></tr></table> 3 shocks in each direction along 3 perpendicular axes. (18 shocks).	Type	Peak value (g's)	Normal duration (D) (ms)	Wave form	Velocity change (Vi)ft/sec	SMD	100	6	Half-sine	12.3	THT	100	6	Half-sine	12.3																														
Type	Peak value (g's)		Normal duration (D) (ms)	Wave form	Velocity change (Vi)ft/sec																																											
SMD	100		6	Half-sine	12.3																																											
THT	100	6	Half-sine	12.3																																												
8.11	Vibration Reference MIL-STD-202 Method 204	Oscillation Frequency : 10Hz~2kHz~10Hz for 20 minutes Equipment : Vibration checker Total Amplitude : 5g Testing Time : 12 hours(20 minutes, 12 cycles each of 3 orientations)																																														
8.12	Resistance to Soldering Heat Reference MIL-STD-202 Method 210	Test condition : THT : Conditions B or C <table><tr><th>Solder technique simulation</th><th>Test condition</th><th>Temperature (°C)</th><th>Time(s)</th><th>Temperature ramp/immersion and emersion rate</th><th>Number of heat cycles</th></tr><tr><td>Dip</td><td>B</td><td>260 $\pm$5 (solder temp)</td><td>10$\pm$1</td><td>25mm/s $\pm$6mm/s</td><td>1</td></tr><tr><td>Wave : Topside board-mou nt product</td><td>C</td><td>260 $\pm$5 (solder temp)</td><td>20$\pm$1</td><td></td><td>1</td></tr></table> Depth : completely cover the termination SMD : Condition K, time above 217° C, 60s-150s, Number of heat cycles : 3 Continental <table><tr><th>Component Size</th><th>Ramp up to 150°C</th><th>Tsmin</th><th>Ts</th><th>Tsmax</th><th>TL</th><th>tL</th><th>Tpeak*</th><th>Tp**</th><th>Time 25°C to peak</th><th>Ramp down</th></tr><tr><td>Thickness < 1.6mm or Thickness 1.6mm-2.5mm and Volume < 350mm³</td><td rowspan="3">3.0$\pm$0.1°C/s (The component shall be specified for usage in serial production with up to 3.0°C/s)</td><td rowspan="3">$\geq 190^\circ\text{C}$</td><td rowspan="3">$\geq 110^\circ\text{C}$</td><td rowspan="3">$\geq 200^\circ\text{C}$</td><td rowspan="3">$\geq 217^\circ\text{C}$</td><td rowspan="3">$\geq 90\text{s}$</td><td>$\geq 260^\circ\text{C}$</td><td>$\geq 40\text{s}$</td><td rowspan="3">$\geq 300\text{s}$</td><td rowspan="3">6.0$\pm$0.1°C/s (The component shall be specified for usage in serial production with up to 6.0°C/s)</td></tr><tr><td>Thickness 1.6mm-2.5mm and Volume < 350-2000mm³ or Thickness > 2.5mm and Volume < 350mm³</td><td>$\geq 250^\circ\text{C}$</td><td>$\geq 30\text{s}$</td></tr><tr><td>Thickness 1.6mm-2.5mm and Volume > 2000mm³ or Thickness > 2.5mm and Volume > 350mm³</td><td>$\geq 245^\circ\text{C}$</td><td></td></tr></table> Table 1 : Minimum requirements for lead-free soldering *peak temperature is measured on the centre top of the component package **tp measured @ T peak-5°C	Solder technique simulation	Test condition	Temperature (°C)	Time(s)	Temperature ramp/immersion and emersion rate	Number of heat cycles	Dip	B	260 $\pm$ 5 (solder temp)	10 $\pm$ 1	25mm/s $\pm$ 6mm/s	1	Wave : Topside board-mou nt product	C	260 $\pm$ 5 (solder temp)	20 $\pm$ 1		1	Component Size	Ramp up to 150°C	Tsmin	Ts	Tsmax	TL	tL	Tpeak*	Tp**	Time 25°C to peak	Ramp down	Thickness < 1.6mm or Thickness 1.6mm-2.5mm and Volume < 350mm ³	3.0 $\pm$ 0.1°C/s (The component shall be specified for usage in serial production with up to 3.0°C/s)	$\geq 190^\circ\text{C}$	$\geq 110^\circ\text{C}$	$\geq 200^\circ\text{C}$	$\geq 217^\circ\text{C}$	$\geq 90\text{s}$	$\geq 260^\circ\text{C}$	$\geq 40\text{s}$	$\geq 300\text{s}$	6.0 $\pm$ 0.1°C/s (The component shall be specified for usage in serial production with up to 6.0°C/s)	Thickness 1.6mm-2.5mm and Volume < 350-2000mm ³ or Thickness > 2.5mm and Volume < 350mm ³	$\geq 250^\circ\text{C}$	$\geq 30\text{s}$	Thickness 1.6mm-2.5mm and Volume > 2000mm ³ or Thickness > 2.5mm and Volume > 350mm ³	$\geq 245^\circ\text{C}$	
Solder technique simulation	Test condition	Temperature (°C)	Time(s)	Temperature ramp/immersion and emersion rate	Number of heat cycles																																											
Dip	B	260 $\pm$ 5 (solder temp)	10 $\pm$ 1	25mm/s $\pm$ 6mm/s	1																																											
Wave : Topside board-mou nt product	C	260 $\pm$ 5 (solder temp)	20 $\pm$ 1		1																																											
Component Size	Ramp up to 150°C	Tsmin	Ts	Tsmax	TL	tL	Tpeak*	Tp**	Time 25°C to peak	Ramp down																																						
Thickness < 1.6mm or Thickness 1.6mm-2.5mm and Volume < 350mm ³	3.0 $\pm$ 0.1°C/s (The component shall be specified for usage in serial production with up to 3.0°C/s)	$\geq 190^\circ\text{C}$	$\geq 110^\circ\text{C}$	$\geq 200^\circ\text{C}$	$\geq 217^\circ\text{C}$	$\geq 90\text{s}$	$\geq 260^\circ\text{C}$	$\geq 40\text{s}$	$\geq 300\text{s}$	6.0 $\pm$ 0.1°C/s (The component shall be specified for usage in serial production with up to 6.0°C/s)																																						
Thickness 1.6mm-2.5mm and Volume < 350-2000mm ³ or Thickness > 2.5mm and Volume < 350mm ³							$\geq 250^\circ\text{C}$	$\geq 30\text{s}$																																								
Thickness 1.6mm-2.5mm and Volume > 2000mm ³ or Thickness > 2.5mm and Volume > 350mm ³							$\geq 245^\circ\text{C}$																																									
8.13	ESD Reference AEC-Q200-002		Direct Contact and Air Discharge PASSIVE COMPONENT HBM ESD Discharge Waveform to a Coaxial Target Test method : AEC-Q200-002 Test mode : Contact Discharge Discharge level : 4 KV (Level : 2)																																													

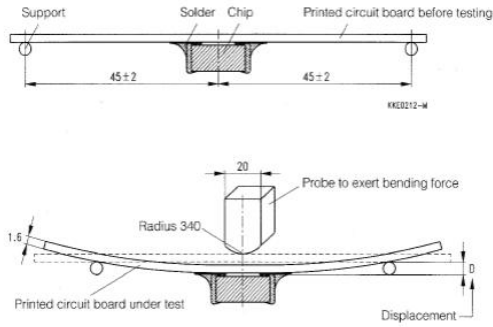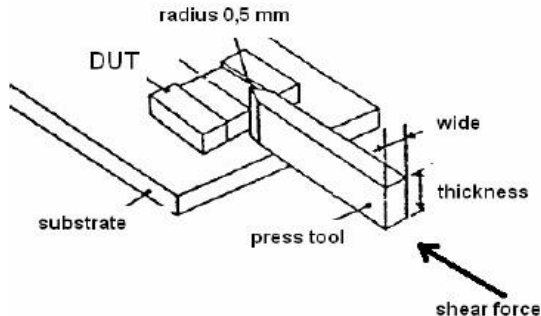Item		Performance	Test Condition																																
8.14	Solderability Reference J-STD-002	More than 95% of the terminal electrode should be covered with solder.	Through-hole Technology (THT : Method A1, Coating Durability Category 2) • SMD : Method B1, Coating Durability Category 2 Method D, Coating Durability Category 2 • Magnification 50x • Pre and Post Electrical Test not required. • Non-soldered type mounting/attach are not applicable.																																
			<table><tr><td>Reference</td><td>Method A1</td><td>Method B1</td><td>Method D</td></tr><tr><td>Welding Process</td><td>Reflow Soldering</td><td>Reflow Soldering for Other Components</td><td>Lead-free Soldering</td></tr><tr><td>Type of Solder</td><td>Tin-Silver-Copper Solder</td><td>Tin-Silver-Copper Solder</td><td>Tin-Silver-Copper Solder</td></tr><tr><td>Flux Immersion Time</td><td>5-10s</td><td>5-10s</td><td>5-10s</td></tr><tr><td>Immersion Angle</td><td>20°~45°</td><td>20°~45°</td><td>20°~45°</td></tr><tr><td>Solder Temperature</td><td>245±5℃</td><td>245±5℃</td><td>260±5℃</td></tr><tr><td>Solder Immersion Time</td><td>5+0/-0.5s</td><td>5+0/-0.5s</td><td>30+5/-0s</td></tr><tr><td>Speed of Immersion and Withdrawal</td><td>25±6mm/s</td><td>25±6mm/s</td><td>25±6mm/s</td></tr></table>	Reference	Method A1	Method B1	Method D	Welding Process	Reflow Soldering	Reflow Soldering for Other Components	Lead-free Soldering	Type of Solder	Tin-Silver-Copper Solder	Tin-Silver-Copper Solder	Tin-Silver-Copper Solder	Flux Immersion Time	5-10s	5-10s	5-10s	Immersion Angle	20°~45°	20°~45°	20°~45°	Solder Temperature	245±5℃	245±5℃	260±5℃	Solder Immersion Time	5+0/-0.5s	5+0/-0.5s	30+5/-0s	Speed of Immersion and Withdrawal	25±6mm/s	25±6mm/s	25±6mm/s
			Reference	Method A1	Method B1	Method D																													
			Welding Process	Reflow Soldering	Reflow Soldering for Other Components	Lead-free Soldering																													
			Type of Solder	Tin-Silver-Copper Solder	Tin-Silver-Copper Solder	Tin-Silver-Copper Solder																													
			Flux Immersion Time	5-10s	5-10s	5-10s																													
			Immersion Angle	20°~45°	20°~45°	20°~45°																													
			Solder Temperature	245±5℃	245±5℃	260±5℃																													
			Solder Immersion Time	5+0/-0.5s	5+0/-0.5s	30+5/-0s																													
Speed of Immersion and Withdrawal	25±6mm/s	25±6mm/s	25±6mm/s																																
8.15	Electrical Characterization	Refer Specification for Approval.	Parametrically test per lot and sample size requirements, summary to show Min, Max, Mean and Standard deviation at room as well as Min and Max operating temperatures. Pre and Post Electrical Test not required																																
8.16	Flammability	In accordance with Referenced Standards.	Reference UL-94 or IEC 60695-11-5																																
8.17	Board Flex(SMD) Reference AEC-Q200-005	Appearance : no damage. Inductance : within± 10% of initial value DCR : within± 15% of initial value and shall not exceed the specification value.	Preconditioning : run through reflow for 3 times. (IPC/JEDEC J-STD-020F Classification Reflow Profiles) Place the 100mm X 40mm board into a fixture similar to the one shown in below Figure with the component facing down. The apparatus shall consist of mechanical means to apply a force which will bend the board (D) x = 2 mm minimum. The duration of the applied forces shall be 60 (+ 5) sec. The force is to be applied only once to the board. 																																
			With the component mounted on a PCB with the device to be tested, apply a 17.7 N (1.8 Kg) force to the side of a device being tested. This force shall be applied for 60 +1 seconds. Also the force shall be applied gradually as not to apply a shock to the component being tested. 																																
8.18	Terminal Strength(SMD) Reference AEC-Q200-006																																		

Note : When there are questions concerning measurement result : measurement shall be made after 48 ± 2 hours of recovery under the standard condition.

9. Soldering Specifications

(1) Soldering

Mildly activated rosin fluxes are preferred. TAI-TECH terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

(2) Soldering Reflow:

Recommended temperature profiles for lead free re-flow soldering in Figure 1. Table 1.1&1.2 (J-STD-020F)

(3) Iron Reflow:

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.(Fig. 2)

- Preheat circuit and products to 150°C
- Never contact the ceramic with the iron tip
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- 280°C tip temperature (max)
- 1.0mm tip diameter (max)
- Limit soldering time to 3sec.

Fig.1 Soldering Reflow

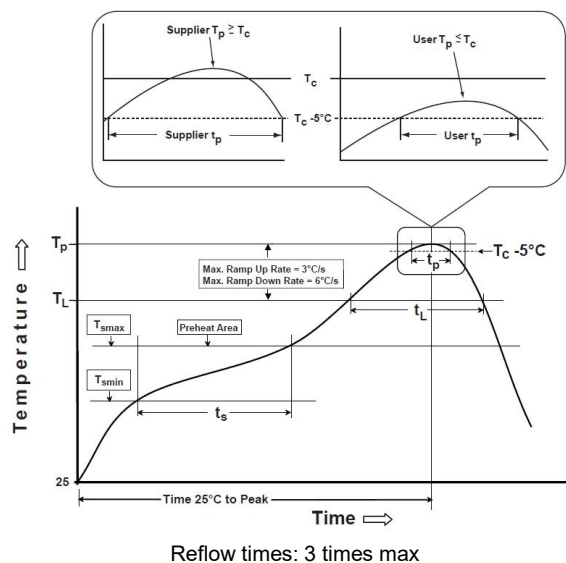


Fig.2 Iron soldering temperature profiles

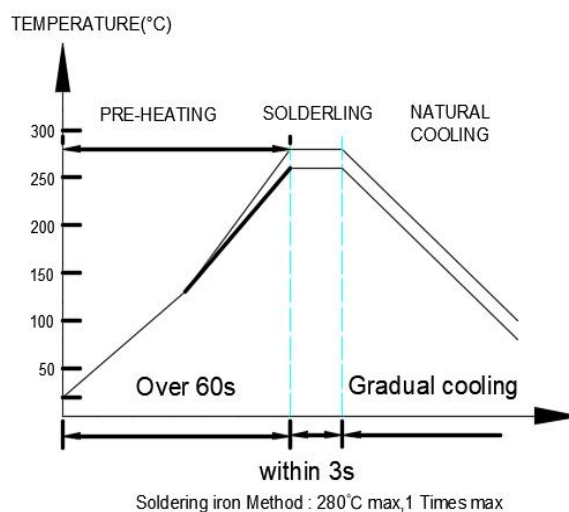


Table (1.1): Reflow Profiles

Profile Type:	Pb-Free Assembly
Preheat	
-Temperature Min(T_{smin})	150°C
-Temperature Max(T_{smax})	200°C
-Time(t_s)from(T_{smin} to T_{smax})	60-120seconds
Ramp-up rate(T_L to T_p)	3°C/second max.
Liquidus temperature(T_L)	217°C
Time(t_L)maintained above T_L	60-150 seconds
Classification temperature(T_c)	See Table (1.2)
Time(t_p) at $T_c - 5^\circ\text{C}$ (T_p should be equal to or less than T_c .)	* < 30 seconds
Ramp-down rate(T_p to T_L)	6°C /second max.
Time 25°C to peak temperature	8 minutes max.

T_p : maximum peak package body temperature, T_c : the classification temperature.

For user (customer) T_p should be equal to or less than T_c .

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Table (1.2) Package Thickness/Volume and Classification Temperature (T_c)

	Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6-2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

Reflow is referred to standard IPC/JEDEC J-STD-020F.

10. Notes

- (1) When there are questions concerning measurement result : measurement shall be made after 48 ± 2 hours of recovery under the standard condition.
- (2) This power choke coil itself does not have any protective function in abnormal condition such as overload, short-circuit and open-circuit conditions, etc. Therefore, it shall be confirmed as the end product that there is no risk of smoking, fire, dielectric withstand voltage, insulation resistance, etc. in abnormal conditions to provide protective devices and/or protection circuit in the end product.
- (3) When this power choke coil was used in a similar or new product to the original one, sometimes it might not be able to satisfy the specifications due to different condition of use.
- (4) Dielectric withstanding test with higher voltage than specific value will damage insulating material and shorten its life.
- (5) This power choke coil must not be used in wet condition by water, coffee or any liquid because insulation strength becomes very low in this condition.
- (6) Please consult our company to confirm the reliability of the process required to wash or use or exposure to a chemical solvent used in this product. PCB washing tested to MIL-STD-202 Method, and dry it off immediately.
- (7) The rated current as listed is either the saturation current or the heating current depending on which value is lower.
- (8) If this power choke is dipped in the cleaning agent, such as toluene, xylene, ketone, and ether system, there is a possibility that the performance decreases greatly, and marking disappears.
- (9) The high power ultrasonic washing may damage the choke body.
- (10) Before use, the user should determine whether this product is suitable for their own design, our company only guarantees that the product meets the requirements of this specification.

Application Notice

- Storage Conditions
 - To maintain the solderability of terminal electrodes:
 1. TAI-TECH products meet IPC/JEDEC J-STD-020F standard-MSL, level 1.
 2. Temperature and humidity conditions: Less than 40℃ and 60% RH.
 3. Recommended products should be used within 12 months from the time of delivery.
 4. The packaging material should be kept where no chlorine or sulfur exists in the air.
- Transportation
 - 1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
 - 2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
 - 3. Bulk handling should ensure that abrasion and mechanical shock are minimized.

11. Typical Performance Curves

