



Approved by:

Checked by:

Issued by:

SPECIFICATION

P/N: 6CS26000C003GJM

深 圳 市 晶 科 鑫 实 业 有 限 公 司

SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD.

Tel: 86-755-88352809

E-mail: sjksale@126.com

Fax: 86-755-88353718

URL: [Http://www.q-crystal.com](http://www.q-crystal.com)

Quartz Crystal

Resistance Welded HC-49/S Surface Mount Package



FEATURE

- Height 4.0mm, or 3.0mm, compact unit for surface mount
- Able to by means of a metal case and completely sealed high solution characteristics
- Copes with high density mounting and is the optimum for mass production

ELECTRICAL SPECIFICATIONS

Nominal frequency	26.000MHz
Oscillation mode	Fundamental
Operating temperature range	-20℃--+70℃
Storage temperature range	-40℃--+85℃
Frequency tolerance	±10PPM
Freq. Temp characteristics	±10PPM
Load capacitance	16 pF
Equivalent series resistance	30ΩMax
Parallel capacitance (Co)	7PF Max
Drive level	100 μW
Insulation resistance	More than 500MΩ AT DC100V

Mechanical characteristics

Resistance to shock:	±3PPM Max ±3Ω Max, naturally drop it 3 times on a hard wood plate from 100cm height
Resistance to vibration:	±3PPM Max ±3Ω Max

Reliability



Aging	±3PPM Max/Year
Air tightness	
(1) Gross leak	should be immersed in hot water($90 \pm 5^{\circ}\text{C}$) for 5 minutes
(2) Fine leak	should be less than 5×10^{-8} atmcc/sec by helium leak detector
Low drive characteristics	Measured $\Delta 1$, C1,3 point at 1.0,10,100μW

Quartz Crystal

Resistance Welded HC-49/S Surface Mount Package




Dimension

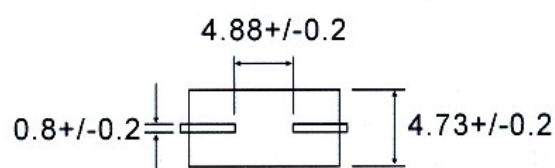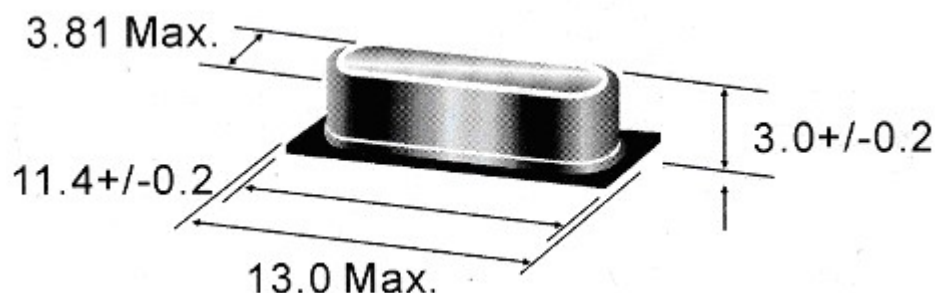

UNIT: MM

Tape & Reel

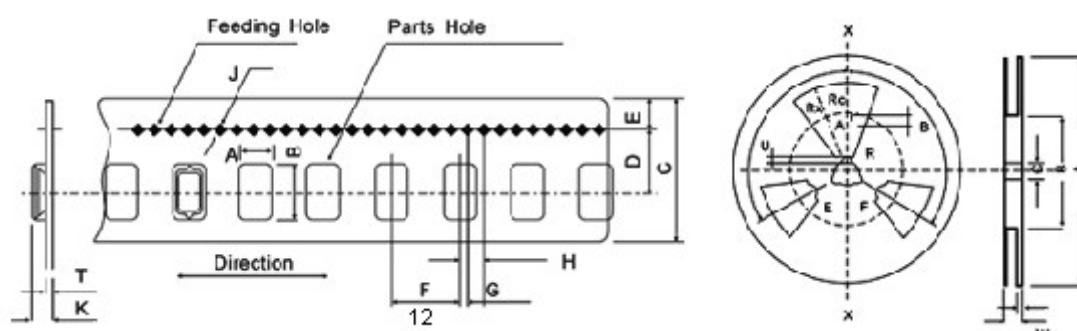

Description			Code	Dimensions
Flanges	Diameter		A	$\phi 330 \pm 2.0$
	Thickness		t	2.4 ± 0.2
	Width between Flanges		W	$+2.0$ $24.4-0$
Flanges	Outline Diameter		B	$\phi 100 \pm 2.0$
	Center Coreslit	Width	F	2.3 ± 1.0
		Depth	V	6.0 ± 1.0
		Position	Q	$120^\circ \pm 3.0^\circ$
	Spindle Diameter		C	$\phi 13.0 \pm 0.5$
	Key Seats	Width	E	2.5
		Depth	U	5.0 ± 0.5
		Position	Q	$120^\circ \pm 3^\circ$
Fenestrate	Outline Radius		Ro	$R90 \pm 1.0$
	Inline Radius		Ri	$R40 \pm 1.0$
	Rounded Corners		Rc	$+2.0$ $R5-0$
	Open Angle		R	$40^\circ \pm 2^\circ$

The design, manufacturing process, and specifications of this device are subject to change without notice.