

Quartz Crystal

SEAM SEALED CERAMIC 6 X 3.5MM SMD TYPE



Approved by:

Checked by:

Issued by:

SPECIFICATION

P/N: 6G120000B002GJM

深圳市晶科鑫实业有限公司
SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD.

Tel: 86-755-88352809
E-mail: sjksale@126.com

Fax: 86-755-88353718
URL: [Http://www.q-crystal.com](http://www.q-crystal.com)

Quartz Crystal

SEAM SEALED CERAMIC 6 X 3.5MM SMD TYPE



FEATURE


- Ultra thin, thickness 1.0mm
- Leadless type
- High precision characteristic covering up to high frequency range
- Automatic mounting
- Embossed tapping specification
- Suitable for solder reflow

ELECTRICAL SPECIFICATIONS

Output Frequency Range	12.000 MHz
Mode	Fundamental
Frequency Tolerance (at 25°C)	±20ppm
Frequency Stability Over Operating Temperature Characteristics	±20ppm
Storage Temperature Range	-40°C ~+85°C
Operating Temperature Range	-20°C ~+70°C
Shunt Capacitance (C ₀)	5.0 pF Max
Driver Level (Typical)	100μW
Load Capacitance (C _L)	18 pF
Equivalent Series Resistance ESR (Ω)	60Ω Max
Aging @25°C 1 st year (Max)	±3ppm/year
Shock Resistance	Drop test of 3 times on 2mm stainless plate from 75cm height

REMARK: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. PLEASE CONFIRM WITH OUR SALES ENGINEER.

Dimension

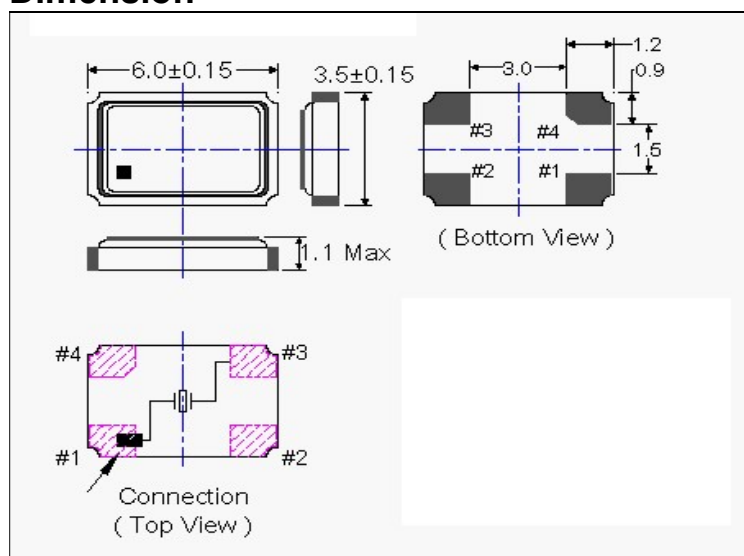


The design, manufacturing process, and specifications of this device are subject to change without notice.

Quartz Crystal

SEAM SEALED CERAMIC 6 X 3.5MM SMD TYPE




Reference Land Pattern

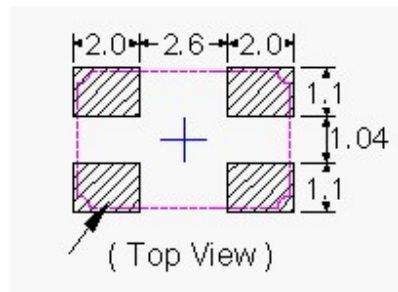


Reflow Condition

Total Time: 200 sec. Max.

Solder Melting Point :220 °C

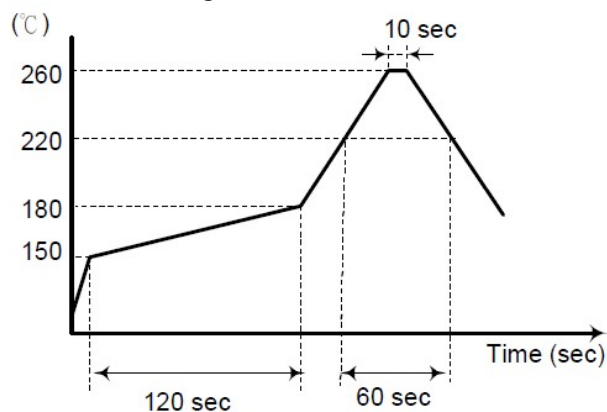

PACKING

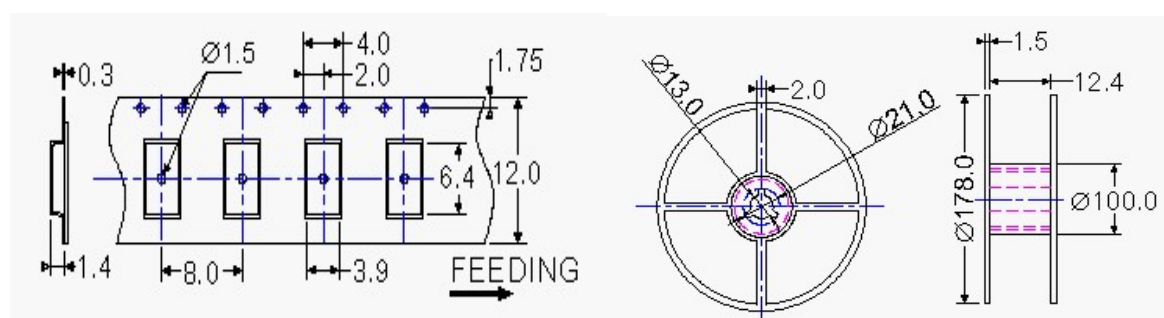

The design, manufacturing process, and specifications of this device are subject to change without notice.