

TO. : BLUME

NO. : A240829



# APPROVAL SHEET

## MULTILAYER CERAMIC CAPACITOR

Automotive Grade  
(AEC-Q200 Qualified)

Approved by customer : (signing or stamping here)

| SAMWHA CAPACITOR CO., LTD.                                                          |                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Prepared by                                                                         | Checked by                                                                          | Approved by                                                                           |
|  |  |  |

2024. 08. 29.



**SAMWHA CAPACITOR CO., LTD.**

Address : 227,GYEONGGIDONG-RO, NAMSA-EUP, CHEOIN-GU, YONGIN-SI, GYEONGGI-DO, KOREA

Contact : TEL 82-31-332-6441 , FAX 82-31-332-7661

Home page : [www.samwha.com](http://www.samwha.com)

## < SPECIFICATION SUMMARY >

|                       |                                 |        |                                                                                                                           |
|-----------------------|---------------------------------|--------|---------------------------------------------------------------------------------------------------------------------------|
| SAMWHA Part no.       | CQ1608X7R102K500NRB             |        |                                                                                                                           |
| Type                  | MLCC for Automotive Application |        |                                                                                                                           |
| Items                 | Specification                   | Unit   | Test Conditions                                                                                                           |
| Capacitance           | 1                               | nF     | Testing Frequency : 1 ±0.1 kHz<br>Testing Voltage : 1 ±0.2 Vrms<br>Should be measured at 25℃.                             |
| Capacitance Tolerance | ± 10                            | %      |                                                                                                                           |
| Dissipation Factor    | Max. 2.5                        | %      |                                                                                                                           |
| Insulation Resistance | Min. 10,000                     | MΩ     | Should be measured with a DC voltage not exceeding rated voltage at 25℃ for 2 minutes of charging.                        |
| Chip Size             | 1.60 ±0.15                      | L (mm) | Capacitance Tolerance Code ----- page 1/9<br>Chip size ----- page 2/9<br>Characteristics & Test Method ----- page 3/9~6/9 |
|                       | 0.80 ±0.10                      | W (mm) |                                                                                                                           |
|                       | 0.80 ±0.10                      | T (mm) |                                                                                                                           |

# Contents

|                                        |            |
|----------------------------------------|------------|
| <b>General Description</b>             | <b>1/9</b> |
| <b>Specifications and Test Methods</b> | <b>3/9</b> |
| <b>Packing</b>                         | <b>7/9</b> |
| <b>Caution</b>                         | <b>8/9</b> |
| <b>Note</b>                            | <b>9/9</b> |

|                             |                                                                |      |              |
|-----------------------------|----------------------------------------------------------------|------|--------------|
| Enactment :<br>Feb. 1, 2010 | <b>STANDARD</b>                                                | NO   | SW - Q - 01A |
|                             | <b>MULTILAYER CERAMIC CAPACITOR</b><br><b>Automotive Grade</b> | Page | 1 / 9        |

## 1. General Code

### (1) Type Designation

**CQ**   **1608**   **X7R**   **102**   **K**   **500**   **N**   **R**   **B**  
(1)   (2)   (3)   (4)   (5)   (6)   (7)   (8)   (9)

1) Multilayer Ceramic Capacitor (Automotive Grade)

2) Size Code :

This is expressed in tens of a millimeter.

The first two digits are the length, The last two digits are width.

3) Temperature Coefficient Code

| Classification | Code | Temperature Range | Capacitance Tolerance |
|----------------|------|-------------------|-----------------------|
| Class I        | C0G  | -55 to +125℃      | ±30 ppm/℃             |
| Class II       | X7R  | -55 to +125℃      | ±15%                  |
|                | X7S  | -55 to +125℃      | ±22%                  |
|                | X7T  | -55 to +125℃      | +22% ~ -33%           |
|                | X6S  | -55 to +105℃      | ±22%                  |

4) Capacitance Code(Pico farads) :

The nominal Capacitance Value in pF is expressed by three digit numbers.

The first two digits represents significant figures and the last digit denotes the number of zero

ex) 104 = 100000 pF

R denotes decimal

8R2 = 8.2 pF

5) Capacitance Tolerance Code

| Code | Tolerance |
|------|-----------|
| B    | ± 0.1 pF  |
| C    | ± 0.25 pF |
| D    | ± 0.5 pF  |
| F    | ± 1.0 %   |

| Code | Tolerance |
|------|-----------|
| G    | ± 2.0 %   |
| J    | ± 5 %     |
| K    | ± 10 %    |
| M    | ± 20 %    |

6) Voltage Code

| Code          | 6R3     | 100    | 160    | 250    | 350    | 500    | 101     | 201     | 251     | 501     | 631     | 102    | 202    | 302    |
|---------------|---------|--------|--------|--------|--------|--------|---------|---------|---------|---------|---------|--------|--------|--------|
| Rated Voltage | DC 6.3V | DC 10V | DC 16V | DC 25V | DC 35V | DC 50V | DC 100V | DC 200V | DC 250V | DC 500V | DC 630V | DC 1KV | DC 2KV | DC 3KV |

7) Termination Code

N : Nickel-Tin Plate

A : Nickel-Tin Plate -> Soft Termination Type

8) Packing Code

R : 7" Reel Type,   L : 13" Reel Type,   B : Bulk Type

## 9) Thickness option

| Thickness (mm) |              | Code  | Thickness (mm) |              | Code |
|----------------|--------------|-------|----------------|--------------|------|
| t              | Tolerance(±) |       | t              | Tolerance(±) |      |
| 0.50           | 0.05         | Blank | 1.35           | 0.20         | H    |
| 0.60           | 0.10         | A     | 1.60           | 0.20         | I    |
| 0.80           | 0.10         | B     | 1.80           | 0.20         | J    |
| 0.85           | 0.15         | B     | 2.00           | 0.25         | K    |
| 1.00           | 0.15         | E     | 2.50           | 0.25         | L    |
| 1.10           | 0.15         | E     | 2.80           | 0.30         | M    |
| 1.15           | 0.15         | E     | 3.20           | 0.30         | N    |
| 1.25           | 0.15         | E     | 5.00           | 0.40         | O    |
| 1.30           | 0.20         | E     |                |              |      |


\*3216 Size  $\geq 2.2\mu\text{F}$  100V  $\Rightarrow$  T : Tol $\pm$ 0.30

## 2. Temperature Characteristics

See Page 6/9 (No.21)

## 3. Constructions and Dimensions

## (1) Dimensions

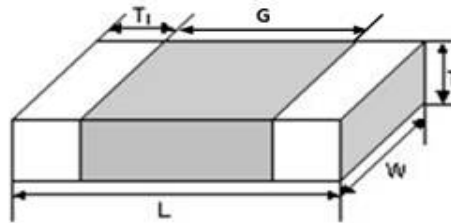


| Size Code | EIA Code | Dimension |        |       |        |          |         |
|-----------|----------|-----------|--------|-------|--------|----------|---------|
|           |          | Length    |        | Width |        | T1(min.) | G(min.) |
|           |          | L         | Tol(±) | W     | Tol(±) |          |         |
| 1005      | 0402     | 1.00      | 0.05   | 0.50  | 0.05   | 0.15     | 0.30    |
| 1608      | 0603     | 1.60      | 0.15   | 0.80  | 0.10   | 0.20     | 0.50    |
| 2012      | 0805     | 2.00      | 0.20   | 1.25  | 0.15   | 0.20     | 0.70    |
| 3216      | 1206     | 3.20      | 0.30   | 1.60  | 0.20   | 0.30     | 1.20    |
| 3225      | 1210     | 3.20      | 0.40   | 2.50  | 0.25   | 0.30     | 1.00    |
| 4520      | 1808     | 4.50      | 0.40   | 2.00  | 0.25   | 0.30     | 1.00    |
| 4532      | 1812     | 4.50      | 0.40   | 3.20  | 0.30   | 0.30     | 2.20    |
| 5750      | 2220     | 5.70      | 0.50   | 5.00  | 0.40   | 0.30     | 3.20    |


\*3216 Size  $\geq 2.2\mu\text{F}$  100V  $\Rightarrow$  L, W : Tol $\pm$ 0.30

(Unit : mm)

## (2) Construction of Termination



## Specifications and Test Methods (For Automotive Applications)
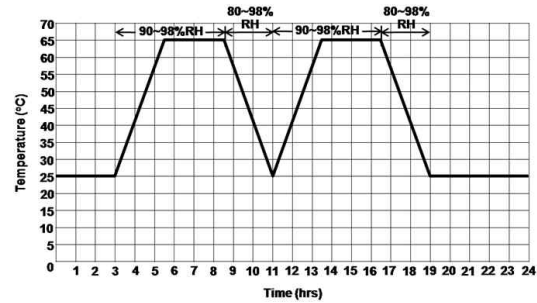
| No.                | AEC-Q200 Test Item                                                      |                                                                   | Specification                                                                                                    |                                                                   | Test Methods and Conditions                                                                                                                                                                                                                                                                                                                                                                                                     |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
|--------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------|---|---|---|----------|----------|------|----------|------|-----------|------|---|------|---|
|                    |                                                                         |                                                                   | Class I                                                                                                          | Class II                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
| 1                  | Pre-and Post-Stress Electrical Test                                     |                                                                   | -                                                                                                                |                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
| 2                  | High Temperature Exposure                                               | Appearance                                                        | No defects which may affect performance                                                                          |                                                                   | Temperature : Max. operating temperature±3℃<br>Maintenance Time : 1000+48/-0 hrs<br>Let sit for 24±2 hours at room temperature, then measure.                                                                                                                                                                                                                                                                                   |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | Capacitance Change                                                | Within ±2.5% or ±0.25pF (Whichever is larger)                                                                    | Within ±10.0% (*Within ±12.5%)                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | Q/D.F.                                                            | 30pF min.: Q≥1000<br>30pF max.: Q≥400+20×C<br>C: Nominal Capacitance (pF)                                        | Rated Voltage 16V min.: 0.05 max.<br>10V: 0.075 max.<br>*0.2 max. |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | I.R.                                                              | More than 10,000MΩ or 500Ω·F (*50Ω·F) (Whichever is smaller)                                                     |                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
| 3                  | Temperature Cycling                                                     | Appearance                                                        | No defects which may affect performance                                                                          |                                                                   | Perform the 1000 cycles according to the four heat treatments listed in the following table.<br>Let sit for 24±2 hours at room temperature, then measure. <table><tr><td>Step</td><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>Temp.(℃)</td><td>-55+0/-3</td><td>25±2</td><td>125+3/-0</td><td>25±2</td></tr><tr><td>Time(min)</td><td>15±3</td><td>1</td><td>15±3</td><td>1</td></tr></table>                          | Step     | 1    | 2 | 3 | 4 | Temp.(℃) | -55+0/-3 | 25±2 | 125+3/-0 | 25±2 | Time(min) | 15±3 | 1 | 15±3 | 1 |
|                    |                                                                         | Step                                                              | 1                                                                                                                | 2                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                 | 3        | 4    |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | Temp.(℃)                                                          | -55+0/-3                                                                                                         | 25±2                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                 | 125+3/-0 | 25±2 |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | Time(min)                                                         | 15±3                                                                                                             | 1                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                 | 15±3     | 1    |   |   |   |          |          |      |          |      |           |      |   |      |   |
| Capacitance Change | Within ±2.5% or ±0.25pF (Whichever is larger)                           | Within ±10.0%                                                     |                                                                                                                  |                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
| Q/D.F.             | 30pF min.:Q≥1000<br>30pF max.:Q≥400+20×C<br>C: Nominal Capacitance (pF) | Rated Voltage 16V min.: 0.05 max.<br>10V: 0.075 max.<br>*0.2 max. |                                                                                                                  |                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
| I.R.               | More than 10,000MΩ or 500Ω·F (*50Ω·F) (Whichever is smaller)            |                                                                   | Initial measurement<br>Perform the initial measurement according to Note 1 for Class II.                         |                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
| 4                  | Destructive Physical Analysis                                           |                                                                   | No defects or abnormalities                                                                                      |                                                                   | Per EIA-469                                                                                                                                                                                                                                                                                                                                                                                                                     |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
| 5                  | Moisture Resistance                                                     | Appearance                                                        | No defects which may affect performance                                                                          |                                                                   | Temperature : 25~65℃, Humidity : 80~98%<br>Cycle Time : 24 hrs/cycle, 10 cycles<br>Let sit for 24±2 hours at room temperature, then measure.                                                                                                                                                                                                |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | Capacitance Change                                                | Within ±3.0% or±0.30pF (Whichever is larger)                                                                     | Within ±12.5%                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | Q/D.F.                                                            | 30pF min.: Q≥350<br>10pF min. and 30pF max.: Q≥275+5/2×C<br>10pF max.: Q≥200+10×C<br>C: Nominal Capacitance (pF) | Rated Voltage 16V min.: 0.05 max.<br>10V: 0.075 max.<br>*0.2 max. |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | I.R.                                                              | More than 10,000MΩ or 500Ω·F (*50Ω·F) (Whichever is smaller)                                                     |                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
| 6                  | Humidity Bias                                                           | Appearance                                                        | No defects which may affect performance                                                                          |                                                                   | Temperature : 85±3℃<br>Humidity : 80~85%<br>Applied Voltage : Rated Voltage and 1.3+0.2/-0V<br>Maintenance Time : 1000+48/-0 hrs<br>Let sit for 24±2 hours at room temperature, then measure.<br>The charge/discharge current is less than 50mA.                                                                                                                                                                                |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | Capacitance Change                                                | Within ±3.0% or ±0.30pF (Whichever is larger)                                                                    | Within ±12.5%                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | Q/D.F.                                                            | 30pF min.: Q≥200<br>30pF max.: Q≥100+10/3×C<br>C: Nominal Capacitance (pF)                                       | Rated Voltage 16V min.: 0.05 max.<br>10V: 0.075 max.<br>*0.2 max. |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | I.R.                                                              | More than 1,000MΩ or 50Ω·F (*5Ω·F) (Whichever is smaller)                                                        |                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
| 7                  | High Temperature Operating Life                                         | Appearance                                                        | No defects which may affect performance                                                                          |                                                                   | Temperature : Max. operating temperature±3℃<br>Applied Voltage : Rated Voltage × 200% (*150%)<br>Maintenance Time : 1000+48/-0 hrs<br>Let sit for 24±2 hours at room temperature, then measure.<br>The charge/discharge current is less than 50mA.<br><br>Initial Measurement for Class II<br>Applied 200% of the rated voltage for one hour at 125±3℃.<br>Remove and let sit for 24±2 hours at room temperature, then measure. |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | Capacitance Change                                                | Within ±3.0% or ±0.30pF (Whichever is larger)                                                                    | Within ±12.5%                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | Q/D.F.                                                            | 30pF min.:Q≥350<br>10pF min. and 30pF max.: Q≥275+5/2×C<br>10pF max.: Q≥200+10×C<br>C: Nominal Capacitance (pF)  | Rated Voltage 16V min.: 0.05 max.<br>10V: 0.075 max.<br>*0.2 max. |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |
|                    |                                                                         | I.R.                                                              | More than 1,000MΩ or 50Ω·F (*5Ω·F) (Whichever is smaller)                                                        |                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |   |   |   |          |          |      |          |      |           |      |   |      |   |


## Specifications and Test Methods (For Automotive Application)

| No.    | AEC-Q200<br>Test Item                                                                          |                                                                                                     | Specification                                                                                  |                                                                                                     | Test Methods and Conditions                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |   |   |          |          |          |            |      |      |
|--------|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---|---|----------|----------|----------|------------|------|------|
|        |                                                                                                |                                                                                                     | Class I                                                                                        | Class II                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
| 8      | External Visual                                                                                |                                                                                                     | No defects or abnormalities                                                                    |                                                                                                     | Visual inspection                                                                                                                                                                                                                                                                                                                                                                                                                                                 |      |   |   |          |          |          |            |      |      |
| 9      | Physical Dimension                                                                             |                                                                                                     | Within the specified dimensions                                                                |                                                                                                     | Using calipers                                                                                                                                                                                                                                                                                                                                                                                                                                                    |      |   |   |          |          |          |            |      |      |
| 10     | Resistance to Solvents                                                                         | Appearance                                                                                          | No defects which may affect performance                                                        |                                                                                                     | Per MIL-STD-202 Method 215                                                                                                                                                                                                                                                                                                                                                                                                                                        |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | Capacitance Change                                                                                  | Within the specified tolerance                                                                 |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | Q/D.F.                                                                                              | 30pF min.: $Q \geq 1000$<br>30pF max.: $Q \geq 400+20 \times C$<br>C: Nominal Capacitance (pF) | Rated Voltage 50V: 0.025 max.<br>25V: 0.03 max.<br>16V: 0.035 max.<br>10V: 0.05 max.<br>*0.125 max. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | I.R.                                                                                                | More than 10,000MΩ or 500Ω·F (*50Ω·F)<br>(Whichever is smaller)                                |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                |                                                                                                     |                                                                                                |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
| 11     | Mechanical Shock                                                                               | Appearance                                                                                          | No defects which may affect performance                                                        |                                                                                                     | Three shocks in each direction should be applied along 3 mutually perpendicular axes of the test specimen (18 shocks)<br>Test Pulse<br>Wave form : Half-sine<br>Duration : 0.5ms<br>Peak value : 1,500G<br>Velocity change : 4.7m/s                                                                                                                                                                                                                               |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | Capacitance Change                                                                                  | Within the specified tolerance                                                                 |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | Q/D.F.                                                                                              | 30pF min.: $Q \geq 1000$<br>30pF max.: $Q \geq 400+20 \times C$<br>C: Nominal Capacitance (pF) | Rated Voltage 50V: 0.025 max.<br>25V: 0.03 max.<br>16V: 0.035 max.<br>10V: 0.05 max.<br>*0.125 max. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | I.R.                                                                                                | More than 10,000MΩ or 500Ω·F (*50Ω·F)<br>(Whichever is smaller)                                |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                |                                                                                                     |                                                                                                |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
| 12     | Vibration                                                                                      | Appearance                                                                                          | No defects or abnormalities                                                                    |                                                                                                     | The specimens should be subjected to a simple harmonic motion having a total amplitude of 1.5mm. The entire frequency range of 10 to 2,000 Hz and return to 10 Hz should be traversed in 20 minutes. This cycle should be performed 12 times in each of three mutually perpendicular directions (total of 36 times).                                                                                                                                              |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | Capacitance Change                                                                                  | Within the specified tolerance                                                                 |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | Q/D.F.                                                                                              | 30pF min.: $Q \geq 1000$<br>30pF max.: $Q \geq 400+20 \times C$<br>C: Nominal Capacitance (pF) | Rated Voltage 50V: 0.025 max.<br>25V: 0.03 max.<br>16V: 0.035 max.<br>10V: 0.05 max.<br>*0.125 max. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | I.R.                                                                                                | More than 10,000MΩ or 500Ω·F (*50Ω·F)<br>(Whichever is smaller)                                |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                |                                                                                                     |                                                                                                |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
| 13     | Resistance to Solder Heat                                                                      | Appearance                                                                                          | No defects which may affect performance                                                        |                                                                                                     | Temperature (Eutectic solder solution) : 260±5℃<br>Dipping Time : 10±1s<br>Let sit for 24±2 hours at room temperature, then measure.<br><br>Initial measurement<br>Perform the initial measurement according to Note 1 for Class II.                                                                                                                                                                                                                              |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | Capacitance Change                                                                                  | Within the specified tolerance                                                                 |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | Q/D.F.                                                                                              | 30pF min.: $Q \geq 1000$<br>30pF max.: $Q \geq 400+20 \times C$<br>C: Nominal Capacitance (pF) | Rated Voltage 50V: 0.025 max.<br>25V: 0.03 max.<br>16V: 0.035 max.<br>10V: 0.05 max.<br>*0.125 max. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | I.R.                                                                                                | More than 10,000MΩ or 500Ω·F (*50Ω·F)<br>(Whichever is smaller)                                |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                |                                                                                                     |                                                                                                |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
| 14     | Thermal Shock                                                                                  | Appearance                                                                                          | No defects which may affect performance                                                        |                                                                                                     | Perform the 300 cycles according to the two heat treatments listed in the following table.<br>Transfer Time : 20sec. max.<br>Let sit for 24±2 hours at room temperature, then measure.<br><table><tr><td>Step</td><td>1</td><td>2</td></tr><tr><td>Temp.(℃)</td><td>-55+0/-3</td><td>125+3/-0</td></tr><tr><td>Time(min.)</td><td>15±3</td><td>15±3</td></tr></table><br>Initial measurement<br>Perform the initial measurement according to Note 1 for Class II. | Step | 1 | 2 | Temp.(℃) | -55+0/-3 | 125+3/-0 | Time(min.) | 15±3 | 15±3 |
|        |                                                                                                | Step                                                                                                | 1                                                                                              | 2                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | Temp.(℃)                                                                                            | -55+0/-3                                                                                       | 125+3/-0                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | Time(min.)                                                                                          | 15±3                                                                                           | 15±3                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                | Capacitance Change                                                                                  | Within ±2.5% or ±0.25pF<br>(Whichever is larger)                                               | Within ±15.0%                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
| Q/D.F. | 30pF min.: $Q \geq 1000$<br>30pF max.: $Q \geq 400+20 \times C$<br>C: Nominal Capacitance (pF) | Rated Voltage 50V: 0.025 max.<br>25V: 0.03 max.<br>16V: 0.035 max.<br>10V: 0.05 max.<br>*0.125 max. |                                                                                                |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
| I.R.   | More than 10,000MΩ or 500Ω·F (*50Ω·F)<br>(Whichever is smaller)                                |                                                                                                     |                                                                                                |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |
|        |                                                                                                |                                                                                                     |                                                                                                |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |   |   |          |          |          |            |      |      |

## Specifications and Test Methods (For Automotive Application)

| No.           | AEC-Q200<br>Test Item                                  |                                                           | Specification                                                                                               |                                                                                                     | Test Methods and Conditions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
|---------------|--------------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------------|-----------|---------|---------|----------|----------|-----------|----------|----------|-----------|----------|--------|----------|-------------|--------|----------|-------------|
|               |                                                        |                                                           | Class I                                                                                                     | Class II                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
| 15            | ESD                                                    | Appearance                                                | No defects which may affect performance                                                                     |                                                                                                     | Per AEC-Q200-002                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
|               |                                                        | Capacitance Change                                        | Within the specified tolerance                                                                              |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
|               |                                                        | Q/D.F.                                                    | 30pF min.:Q≥1000<br>30pF max.:Q≥400+20×C<br>C: Nominal Capacitance (pF)                                     | Rated Voltage 50V: 0.025 max.<br>25V: 0.03 max.<br>16V: 0.035 max.<br>10V: 0.05 max.<br>*0.125 max. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
|               |                                                        | I.R.                                                      | More than 10,000MΩ or 500Ω·F (*50Ω·F)<br>(Whichever is smaller)                                             |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
| 16            | Solderability                                          |                                                           | 95% of the terminations is to be soldered evenly and continuously.                                          |                                                                                                     | (a) Preheat at 155℃ for 4 hours, and then immerse the capacitor in a solution of ethanol and rosin. Immerse in eutectic solder solution for 5+0/-0.5 seconds at 235±5℃.<br>(b) Steam aging for 8 hours, and then immerse the capacitor in a solution of ethanol and rosin. Immerse in eutectic solder solution for 5+0/-0.5 seconds at 235±5℃.<br>(c) Steam aging for 8 hours, and then immerse the capacitor in a solution of ethanol and rosin. Immerse in eutectic solder solution for 120±5 seconds at 260±5℃.                                                                                           |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
| 17            | Electrical Characterization                            | Appearance                                                | No defects or abnormalities                                                                                 |                                                                                                     | The capacitance/Q/D.F. should be measured at 25℃ at the frequency and voltage shown in the table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
|               |                                                        | Capacitance Change                                        | Within the specified tolerance                                                                              |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
|               |                                                        | Q/D.F.                                                    | 30pF min.:Q≥1000<br>30pF max.:Q≥400+20×C<br>C: Nominal Capacitance (pF)                                     | Rated Voltage 50V: 0.025 max.<br>25V: 0.03 max.<br>16V: 0.035 max.<br>10V: 0.05 max.<br>*0.125 max. | <table><tr><th>Class</th><th>Capacitance (C)</th><th>Frequency</th><th>Voltage</th></tr><tr><td rowspan="2">Class I</td><td>C&lt;1000pF</td><td>1±0.1MHz</td><td>0.5~5Vrms</td></tr><tr><td>C≥1000pF</td><td>1±0.1kHz</td><td>1±0.2Vrms</td></tr><tr><td rowspan="2">Class II</td><td>C≤10μF</td><td>1±0.1kHz</td><td>0.5~1.0Vrms</td></tr><tr><td>C&gt;10μF</td><td>120±24Hz</td><td>0.5±0.1Vrms</td></tr></table><br>· Initial measurement<br>Perform the initial measurement according to Note1 for Class II<br>· Measurement after test<br>Take it out and set it for 24±2 hours (Class II) then measure | Class | Capacitance (C) | Frequency | Voltage | Class I | C<1000pF | 1±0.1MHz | 0.5~5Vrms | C≥1000pF | 1±0.1kHz | 1±0.2Vrms | Class II | C≤10μF | 1±0.1kHz | 0.5~1.0Vrms | C>10μF | 120±24Hz | 0.5±0.1Vrms |
|               |                                                        | Class                                                     | Capacitance (C)                                                                                             | Frequency                                                                                           | Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
|               |                                                        | Class I                                                   | C<1000pF                                                                                                    | 1±0.1MHz                                                                                            | 0.5~5Vrms                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
|               |                                                        |                                                           | C≥1000pF                                                                                                    | 1±0.1kHz                                                                                            | 1±0.2Vrms                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
| Class II      | C≤10μF                                                 | 1±0.1kHz                                                  | 0.5~1.0Vrms                                                                                                 |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
|               | C>10μF                                                 | 120±24Hz                                                  | 0.5±0.1Vrms                                                                                                 |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
| I.R. at 25℃   | More than 100,000MΩ or 1,000Ω·F (Whichever is smaller) | More than 10,000MΩ 500Ω·F (*50Ω·F) (Whichever is smaller) | Should be measured with a DC voltage not exceeding rated voltage at 25℃ and 125℃ for 2 minutes of charging. |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
| I.R. at 125℃  | More than 10,000MΩ or 100Ω·F (Whichever is smaller)    | More than 1,000MΩ or 10Ω·F (*1Ω·F) (Whichever is smaller) |                                                                                                             |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
| Voltage proof | No dielectric breakdown or mechanical breakdown        |                                                           |                                                                                                             |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
| 18            | Board Flex                                             | Appearance                                                | No defects which may affect performance                                                                     |                                                                                                     | <br>Flexure for Class I: 3mm max.<br>for Class II: 2mm max.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
|               |                                                        | Capacitance Change                                        | Within ±5.0% or ±0.5pF (Whichever is larger)                                                                | Within the specified tolerance                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
| 19            | Terminal Strength                                      | Appearance                                                | No defects which may affect performance                                                                     |                                                                                                     | Apply 18N <sup>1)</sup> force in parallel with the test jig for 60±1 seconds.<br><sup>1)</sup> 10N for 1608(EIA:0603) size<br>2N for 1005(EIA:0402) size                                                                                                                                                                                                                                                                                                                                                                                                                                                     |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |
|               |                                                        | Capacitance Change                                        | Within ±5.0% or ±0.5pF (Whichever is larger)                                                                | Within the specified tolerance                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |       |                 |           |         |         |          |          |           |          |          |           |          |        |          |             |        |          |             |

## Specifications and Test Methods (For Automotive Application)

| No.                  | AEC-Q200<br>Test Item                              |                            | Specification                                                                                                                                                                                                                                                                                             |                                                                                         | Test Methods and Conditions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |       |            |         |    |         |          |            |          |      |        |       |
|----------------------|----------------------------------------------------|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------|------------|---------|----|---------|----------|------------|----------|------|--------|-------|
|                      |                                                    |                            | Class I                                                                                                                                                                                                                                                                                                   | Class II                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |               |       |            |         |    |         |          |            |          |      |        |       |
| 20                   | Beam Load                                          |                            | The chip endure following force.                                                                                                                                                                                                                                                                          |                                                                                         | Apply a force as shown in the following figure.<br>(i) Chip Length : 2.5mm max.      (ii) Chip Length : 3.2mm min.<br>Beam Speed : 0.5mm/s      Beam Speed : 2.5mm/s<br>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |       |            |         |    |         |          |            |          |      |        |       |
|                      |                                                    |                            | <table><tr><th>Chip Length</th><th>Thickness (T)</th><th>Force</th></tr><tr><td rowspan="2">2.5mm max.</td><td>T≤0.5mm</td><td>8N</td></tr><tr><td>T&gt;0.5mm</td><td>20N</td></tr><tr><td rowspan="2">3.2mm min.</td><td>T&lt;1.25mm</td><td>15N</td></tr><tr><td>T≥1.25</td><td>54.5N</td></tr></table> | Chip Length                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Thickness (T) | Force | 2.5mm max. | T≤0.5mm | 8N | T>0.5mm | 20N      | 3.2mm min. | T<1.25mm | 15N  | T≥1.25 | 54.5N |
| Chip Length          | Thickness (T)                                      | Force                      |                                                                                                                                                                                                                                                                                                           |                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |               |       |            |         |    |         |          |            |          |      |        |       |
| 2.5mm max.           | T≤0.5mm                                            | 8N                         |                                                                                                                                                                                                                                                                                                           |                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |               |       |            |         |    |         |          |            |          |      |        |       |
|                      | T>0.5mm                                            | 20N                        |                                                                                                                                                                                                                                                                                                           |                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |               |       |            |         |    |         |          |            |          |      |        |       |
| 3.2mm min.           | T<1.25mm                                           | 15N                        |                                                                                                                                                                                                                                                                                                           |                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |               |       |            |         |    |         |          |            |          |      |        |       |
|                      | T≥1.25                                             | 54.5N                      |                                                                                                                                                                                                                                                                                                           |                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |               |       |            |         |    |         |          |            |          |      |        |       |
| 21                   | Capacitance<br>Temperature<br>Characteris-<br>tics | Capacitance<br>Change      |                                                                                                                                                                                                                                                                                                           | X7R : Within ±15%<br>X7S : Within ±22%<br>X6S : Within ±22%<br>X7T : Within +22% ~ -33% | (i) Class I<br>The temperature coefficient is determined using the capacitance measured in step 3 as a reference. When cycling the temperature sequentially from step 1 through 5, the capacitance should be within the specified tolerance for the temperature coefficient. The capacitance drift is calculated by dividing the differences between the maximum and minimum measured values in steps 1, 3 and 5 by the capacitance value in step 3.<br><table><tr><th>Step</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th></tr><tr><th>Temp.(℃)</th><td>25±2</td><td>-55±3</td><td>25±2</td><td>125±3</td><td>25±2</td></tr></table><br>(ii) Class II<br>The ranges of capacitance change compared with the 25℃ value over the temperature range from -55℃ to 125℃.<br><br>Initial measurement<br>Perform the initial measurement according to Note 1 for Class II. | Step          | 1     | 2          | 3       | 4  | 5       | Temp.(℃) | 25±2       | -55±3    | 25±2 | 125±3  | 25±2  |
|                      |                                                    | Step                       | 1                                                                                                                                                                                                                                                                                                         | 2                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 3             | 4     | 5          |         |    |         |          |            |          |      |        |       |
|                      |                                                    | Temp.(℃)                   | 25±2                                                                                                                                                                                                                                                                                                      | -55±3                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 25±2          | 125±3 | 25±2       |         |    |         |          |            |          |      |        |       |
|                      |                                                    | Temperature<br>Coefficient | 0±30 ppm/℃                                                                                                                                                                                                                                                                                                |                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |               |       |            |         |    |         |          |            |          |      |        |       |
| Capacitance<br>Drift | Within ±0.2% or ±0.05pF<br>(Whichever is larger)   |                            |                                                                                                                                                                                                                                                                                                           |                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |               |       |            |         |    |         |          |            |          |      |        |       |
|                      |                                                    |                            |                                                                                                                                                                                                                                                                                                           |                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |               |       |            |         |    |         |          |            |          |      |        |       |

In the case of "\*" is specifications for "Thin Layer Large Capacitance Type"

Note 1. Initial Measurement for Class II

Perform a heat treatment at 150+0/-10℃ for one hour, and then let sit for 24±2 hours at room temperature, then measure.

"Following the International standards, the title of each test item is subject to change."

## Packing


### (1) Bulk Packing

- ① 1000 pcs per polybag
- ② 5 polybags per inner box
- ③ 10 inner boxes per out box

### (2) Reel Packing

- ① 8~10 reels per inner box
- ② 6 inner boxes per out box

### (3) Reel Dimensions





(Unit : mm)

| Mark      | Size Code | EIA Code  | A                 | B                    | C                 | D                 | E           | W            |
|-----------|-----------|-----------|-------------------|----------------------|-------------------|-------------------|-------------|--------------|
| 7 " Reel  | 1005~3225 | 0402~1210 | $\Phi 178 \pm 2$  | $\Phi 50 \text{Min}$ | $\Phi 13 \pm 0.5$ | $\Phi 21 \pm 0.8$ | $2 \pm 0.5$ | $10 \pm 1.5$ |
|           | 4520~4532 | 1808~1812 | $\Phi 180 +0, -3$ | $\Phi 60 -0, +1$     | $\Phi 13 \pm 0.2$ | $\Phi 57 -0 +1$   | $3 \pm 0.2$ | $13 \pm 0.5$ |
| 13 " Reel | 1005~3225 | 0402~1210 | $\Phi 330 \pm 2$  | $\Phi 70 \text{Min}$ | $\Phi 13 \pm 0.5$ | $\Phi 21 \pm 0.8$ | $2 \pm 0.5$ | $10 \pm 1.5$ |


### (4) Number of Package

| Size Code | EIA Code | 7"                 | 13"                |
|-----------|----------|--------------------|--------------------|
|           |          | Quantity(pcs)/Reel | Quantity(pcs)/Reel |
| 1005      | 0402     | 10,000             | 50,000             |
| 1608      | 0603     | 4,000              | 15,000             |
| 2012      | 0805     | 3,000 ~ 4,000      | 8,000 ~ 15,000     |
| 3216      | 1206     | 2,000 ~ 4,000      | 6,000 ~ 10,000     |
| 3225      | 1210     | 1,000 ~ 3,000      | 4,000 ~ 10,000     |
| 4520      | 1808     | 1,500 ~ 3,000      | —                  |
| 4532      | 1812     | 500 ~ 1,000        | 1,500 ~ 5,000      |

### (5) Tape Dimensions

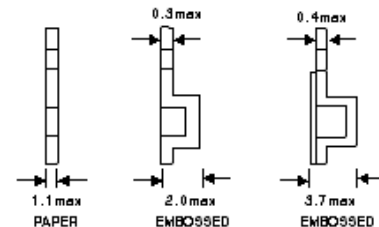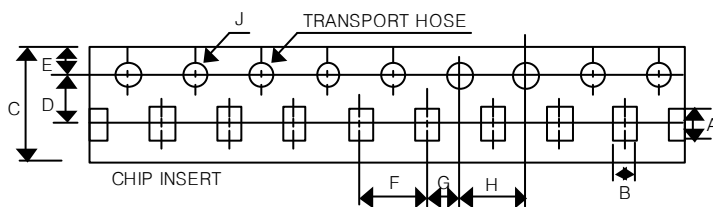

| Size Code | EIA Code | A              | B              | C              | D              | E              | F                              | G             | H             | J             |
|-----------|----------|----------------|----------------|----------------|----------------|----------------|--------------------------------|---------------|---------------|---------------|
| 1005      | 0402     | $1.15 \pm 0.1$ | $0.65 \pm 0.1$ | $8.0 \pm 0.3$  | $3.5 \pm 0.05$ | $1.75 \pm 0.1$ | $2.0 \pm 0.05$                 | $2.0 \pm 0.1$ | $4.0 \pm 0.1$ | $1.5 \pm 0.1$ |
| 1608      | 0603     | $1.9 \pm 0.2$  | $1.10 \pm 0.2$ | $8.0 \pm 0.3$  | $3.5 \pm 0.05$ | $1.75 \pm 0.1$ | $4.0 \pm 0.1$                  | $2.0 \pm 0.1$ | $4.0 \pm 0.1$ | $1.5 \pm 0.1$ |
| 2012      | 0805     | $2.4 \pm 0.2$  | $1.65 \pm 0.2$ | $8.0 \pm 0.3$  | $3.5 \pm 0.05$ | $1.75 \pm 0.1$ | $4.0 \pm 0.1$                  | $2.0 \pm 0.1$ | $4.0 \pm 0.1$ | $1.5 \pm 0.1$ |
| 3216      | 1206     | $3.6 \pm 0.2$  | $2.00 \pm 0.2$ | $8.0 \pm 0.3$  | $3.5 \pm 0.05$ | $1.75 \pm 0.1$ | $4.0 \pm 0.1$                  | $2.0 \pm 0.1$ | $4.0 \pm 0.1$ | $1.5 \pm 0.1$ |
| 3225      | 1210     | $3.6 \pm 0.2$  | $2.80 \pm 0.2$ | $8.0 \pm 0.3$  | $3.5 \pm 0.05$ | $1.75 \pm 0.1$ | $4.0 \pm 0.1$                  | $2.0 \pm 0.1$ | $4.0 \pm 0.1$ | $1.5 \pm 0.1$ |
| 4520      | 1808     | $4.8 \pm 0.2$  | $2.3 \pm 0.2$  | $12.0 \pm 0.3$ | $5.5 \pm 0.1$  | $1.75 \pm 0.1$ | $4.0 \pm 0.1$<br>$8.0 \pm 0.1$ | $2.0 \pm 0.1$ | $4.0 \pm 0.1$ | $1.5 \pm 0.1$ |
| 4532      | 1812     | $4.9 \pm 0.2$  | $3.6 \pm 0.2$  | $12.0 \pm 0.3$ | $5.5 \pm 0.1$  | $1.75 \pm 0.1$ | $8.0 \pm 0.1$                  | $2.0 \pm 0.1$ | $4.0 \pm 0.1$ | $1.5 \pm 0.1$ |

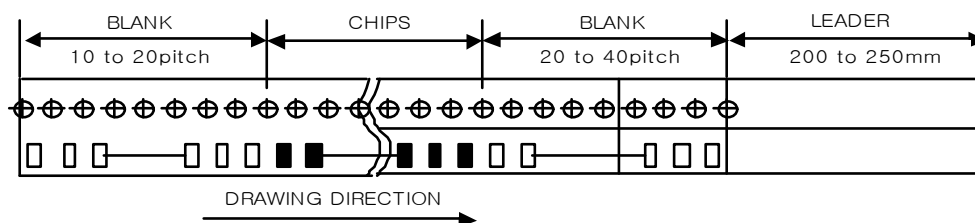

## Caution

### ► Storage Condition

When solderability is considered, capacitor are recommended to be used in 12 months.

(1) Temperature:  $25^{\circ}\text{C} \pm 10^{\circ}\text{C}$

(2) Relative Humidity: Below 70% RH

### ► The Regulation of Environmental Pollution Materials


Never use materials mentioned below in MLCC products regulated this document.

Pb, Cd, Hg,  $\text{Cr}^{+6}$ , PBB(Polybrominated biphenyl), PBDE(Polybrominated diphenyl ethers), asbestos

### ► Mounting Position


Choose a mounting position that minimizes the stress imposed on the chip during flexing or bending of the board.

[Component direction]



Locate chip horizontal to the direction in which stress acts.

[Chip Mounting Close to Board Separation Point]



Chip arrangement Worst A-C- (B, D) Best

### ► Reflow Soldering


1. The sudden temperature change easily causes mechanical damages to ceramic components. Therefore, the preheating procedures should be required for the soldering of ceramic components.
2. Please refer to the recommended soldering profiles as shown in figures, and keep the temperature difference( $\Delta T$ ) within the range recommended in Table 1.

Table 1


| Size code (EIA Code)  | Temperature Difference              |
|-----------------------|-------------------------------------|
| 1005~3216 (0402~1206) | $\Delta T \leq 190^{\circ}\text{C}$ |
| 3225 (1210)           | $\Delta T \leq 130^{\circ}\text{C}$ |

### Recommended Reflow Soldering Profile for Lead Free Solder

Infrared Reflow

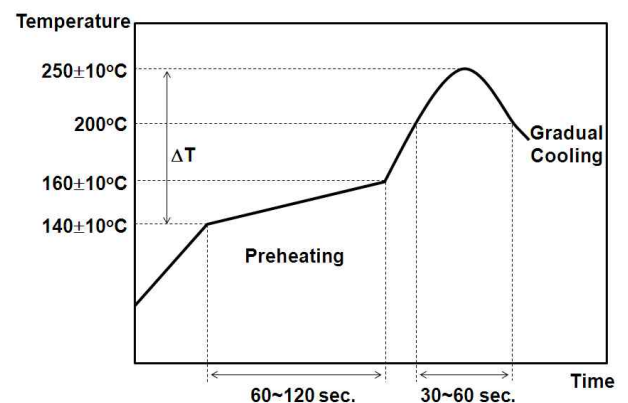

Vapor Reflow

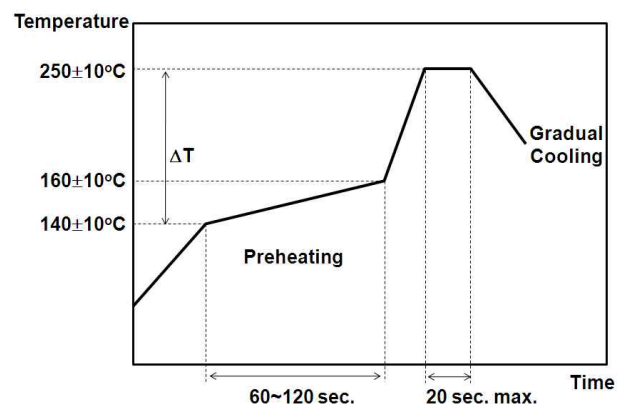

**Note**

- 'Aging'/'De-aging' behavior of high dielectric constant type MLCCs  
(Typically represented by X7R temperature characteristic of which main composition is BaTiO<sub>3</sub>)

'Aging' / 'De-aging' Behavior of high dielectric MLCCs Please note that high dielectric type dielectric ceramic capacitors have a "normal" 'aging' behavior / characteristic, that is; their capacitance value decreases with time from its value when it was first manufactured. From that date, the capacitance value begins to decrease at a logarithmic rate defined by:

$$C_t = C_{24} (1 - k \log_{10} t)$$


where,

$C_t$  : Capacitance value, t hours after the start of 'aging'

$C_{24}$  : Capacitance value, 24 hours after its manufacture

k : Aging constant (capacitance decrease per decade-hour)

t : time, in hours, from the start of 'aging'

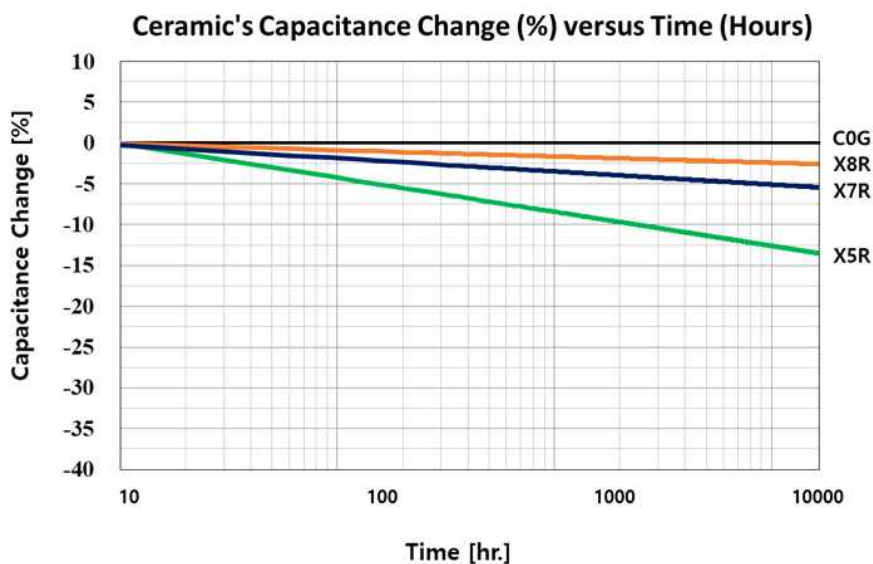

The capacitance value can be restored (also known as 'de-aged') by exposing the component to elevated temperatures approaching its curie temperature (approximately 120°C). This 'de-aging' can occur during the component's solder-assembly onto the PCB, during life or temperature cycle testing, or by baking at 150°C for about 1 hour.