

MESSRS. Customer

PRELIMINARY SPECIFICATION

Product	MEMS Microphone
Part No.	SM3526B381YRD-ANC
Customer Approval	
Customer Part No.	

Remark :

1. This specification is for temporary use only, not for formal approval.
2. Please do not place order on this Part Number .

Approved By	Checked By	Made By
Engineering Dept. ERIC CHEN NOV-28-2024	Engineering Dept. ZACK KUO NOV-28-2024	Engineering Dept. HANK CHEN NOV-28-2024



Advanced Acoustic Technology Corporation



ISO 9001 Certified

ISO 14001 Certified

Head Office / 2F, No.207, Sec. 6, Chung Shan N. Rd., Taipei, Taiwan

Tel: +886-2-8866-5255

Fax: +886-2-8866-5250

RoHS

SM3526B381YRD-ANC is a small package, single-ended output bottom port analog MEMS microphone. The MEMS Microphones are integrated with specialized Pre-amplification ASIC to provide high sensitivity, high SNR output from a capacitive audio sensor. It's packaged for surface mounting and high temperature re-flow assembly.

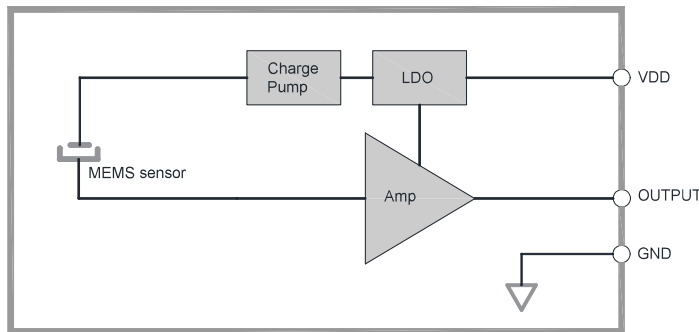


Fig. 1 Microphone block diagram

Absolute maximum ratings

Parameter	Maximum Ratings	Unit
Supply voltage	3.6	V
Supply current	1	mA
Output current	1	mA
Operation temperature range	-40~100	°C
Storage temperature range	-40~100	°C

Note: Stresses at the maximum ratings shown in table may cause permanent damage to the device. These are stress ratings only at which the device may not function when an operation at these or any other condition beyond those specified under "Electro-Acoustic Specifications".

Product features

- ✧ 3.5x2.65x0.98mm Bottom Port
- ✧ Single Ended Analog Output
- ✧ SNR of 68dBA
- ✧ RF Shielded
- ✧ Standard SMD Reflow Technology
- ✧ RoHS Compliance&Halogen Free and meets all rayking's environmental requirements

Typical applications

- ✧ Smart Phones
- ✧ TWS Headsets
- ✧ Smart Speakers
- ✧ Wearable Electronics
- ✧ Portable Electronics
- ✧ Smart Home Electronics
- ✧ Laptop Computers



ESD CAUTION

ESD (electrostatic discharge) sensitive device.

Proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

1. Electrical specifications

Standard Conditions		Basic Test Conditions	
Ordinary Temperature	15 to 35°C	Temperature	20 ± 2°C
Ordinary Humidity	45 to 85%	Humidity	63 to 67%
Ordinary air pressure	86 to 106kPa	Ordinary air pressure	86 to 106kPa

Test condition: Vdd=1.8V, no load, unless otherwise specified.

Specification	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Directivity			Omni-directional			
Sensitivity Range	S	94dB SPL @1kHz,	-39	-38	-37	dB
Output Impedance	Z _{out}	@1kHz,			400	Ω
Current Consumption	I	Vdd =1.8V		75	100	uA
S/N Ratio	SNR	20-20KHz bandwidth, A-weight		68		dB(A)
Operating Voltage	V _{DD}		1.6	1.8	3.3	V
Total Harmonic distortion	THD	94dB SPL @1kHz, S=Typ		0.1	0.5	%
Low Frequency Roll Off	LFRO	-3 dB relative to 1kHz	-	30	-	Hz
Acoustic Overload Point	AOP	10% THD @1kHz S=Typ		125		dB
Power Supply Rejection	PSR	100mVpp Square wave @217Hz, A-weighted		-99	-90	dBV
Power Supply Rejection Ratio	PSRR	200mVpp Sine wave @1kHz, A-weighted	60	68		dB
Phase Response	PR		-5		5	°

Note: Frequency response, sensitivity, phase and current consumption are tested by 100% on product line.

2. Typical frequency response

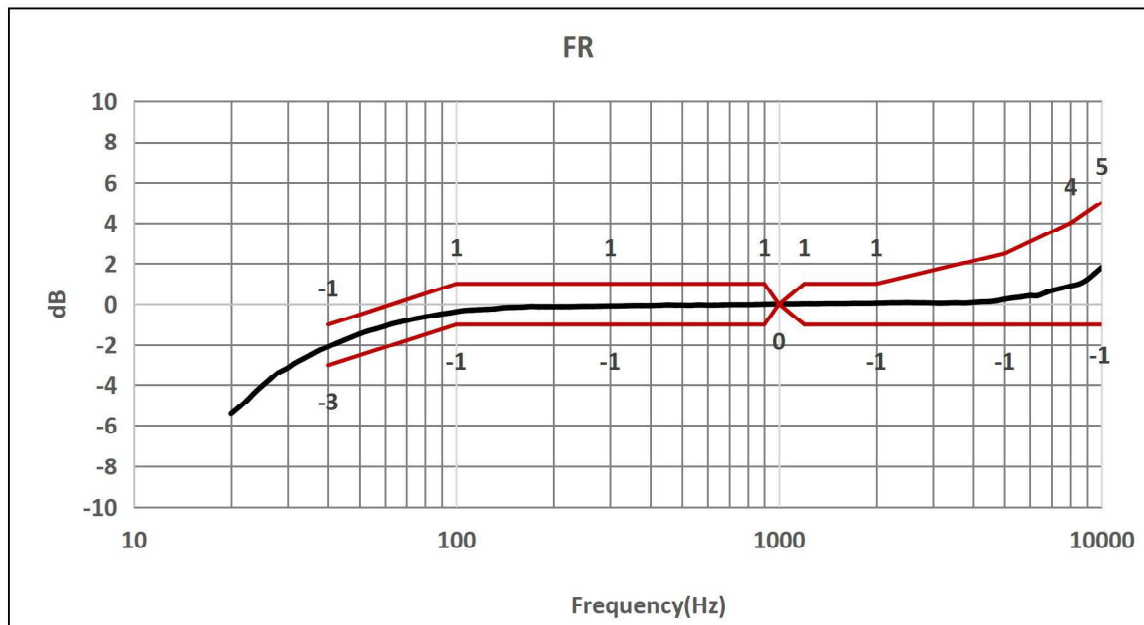


Fig. 2 Frequency response curve normalized to 1kHz

3. Measurement system Setup:

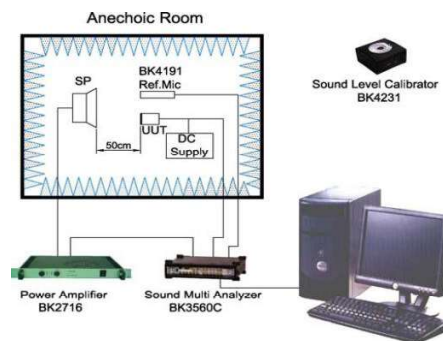


Fig. 3 Measurement System Setup

4. Mechanical Characteristics

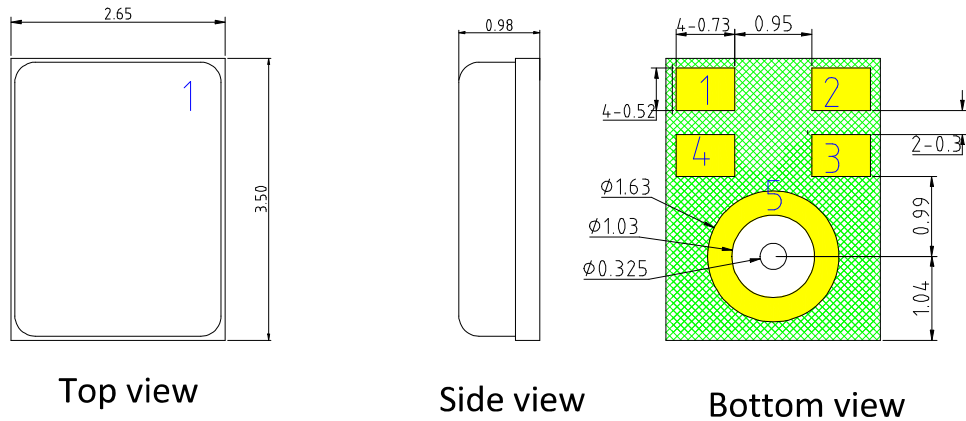
Unit: mm Unmarked Tolerance: ± 0.1 (mm)

Fig. 4 Dimension

Item	Dimension	Tolerance(+/-)	Units
Length(L)	3.50	0.10	mm
Width(W)	2.65	0.10	mm
Height(H)	0.98	0.10	mm
Acoustic Port(AP)	Ø0.325	0.05	mm

Pin	Pin Name	Type	Description
1	V _{DD}	Power	Power Supply
2	Output	Signal	Output Signal
3	GND	Ground	Ground
4	GND	Ground	Ground
5	GND	Ground	Ground

Note: All Ground Pin must be connected to the ground in end application

5. Reliability test

The sensitivity should be within ± 3 dB from initial sensitivity after 2 hours recovering on the conditioning of $20 \pm 5^\circ\text{C}$.

High Temperature Test	After exposure at 105°C for 1000 hours, the sensitivity should be within ± 3 dB from the initial value.
Low Temperature Test	After exposure at -40°C for 1000 hours, the sensitivity should be within ± 3 dB from the initial value.
High Humidity & High Heat Test	After exposure at $85 \pm 3^\circ\text{C}$ and 85% relative humidity for 1000 hours, the sensitivity should be within ± 3 dB from the initial value.
Thermal Shocking Test	100 cycles air-to-air thermal shock from -40°C to $+125^\circ\text{C}$ with 15 minute soaks. the sensitivity should be within ± 3 dB from the initial value.
Vibration Test	4 cycles of 20 to 2,000 Hz sinusoidal sweep with 20 G peak acceleration lasting 12 minutes in X, Y, and Z directions.
Drop Test	Height: 1.5m Fixture Weight: 150g (Sound Hole Diameter in the fixture is $\geq 0.8\text{mm}$) Reference Surface: slippery marble floor Duration: 4 corners*4 times, 6 faces*4 times The sensitivity change should be less than 1dB after testing
ESD Test	3 discharges of ± 8 kV direct contact to lid while unit is grounded. (According to standard of IEC61000-4-2) 3 discharges of ± 2 kV direct contact to I/O pins. (HBM mode) 3 discharges of ± 200 V direct contact to I/O pins. (MM mode)
Mechanical Shock	3 pulses of 10,000 G in the X, Y, and Z direction
Reflow	3 reflow cycles with peak temperature of $+260^\circ\text{C}$

6. Reflow profile:


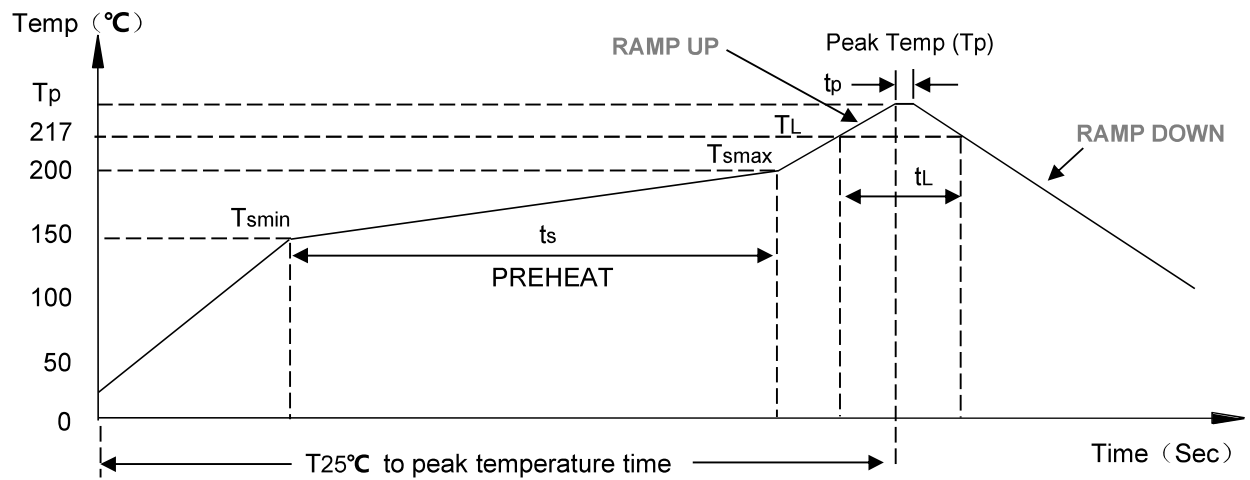



Fig. 5 Reflow Profile

Parameter		Reference	Specification
Average Ramp Rate		T_{smax} to T_P	3°C/sec max
Preheat	Minimum Temperature	T_{SMIN}	150°C
	Maximum Temperature	T_{SMAX}	200°C
	Time T_{SMIN} to T_{SMAX}	t_s	60 sec to 180 sec
Time Maintained Above Liquidous		t_L	60 sec to 150 sec
Liquidous Temperature		T_L	217°C
Peak Temperature		T_P	260°C +0°C/-5°C
Time Within +5°C of Actual Peak Temperature		t_p	20 sec to 40 sec
Ramp-Down Rate		T_P to T_{SMAX}	3°C/sec max
Time +25°C ($t_{25°C}$) to Peak Temperature			8 min max


7. Pickup Tool Pick Location& PCB Solder Pad Layout

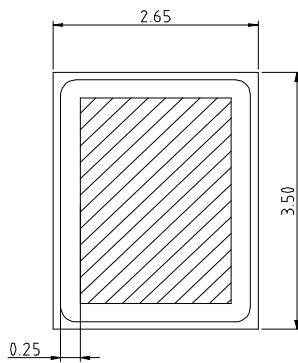

Pickup area

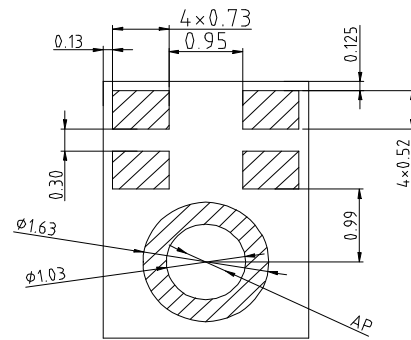

PCB Land Pattern

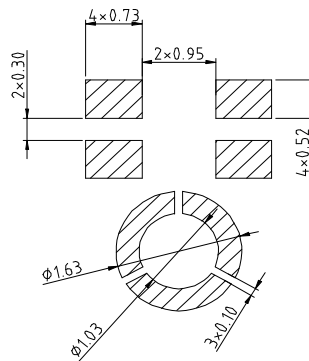


Solder stencil Pattern

Notes:

- Dimensions are in millimeters(mm) unless otherwise specified.
- Tolerance is ± 0.1 mm unless otherwise specified.
- The recommended non-plated hole("AP") diameter of PCB is 0.5-0.7mm.

8. Packing (Unit : mm)

13'' Reel drawing:

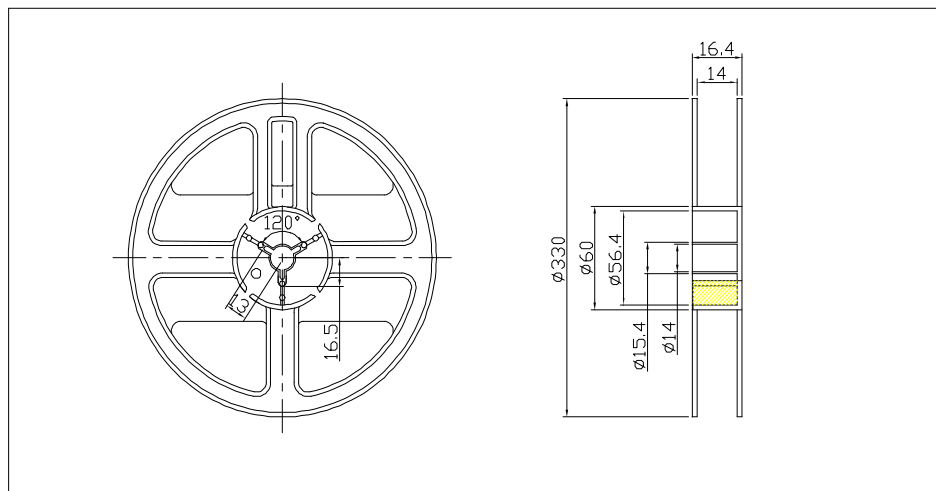

Tape drawing:


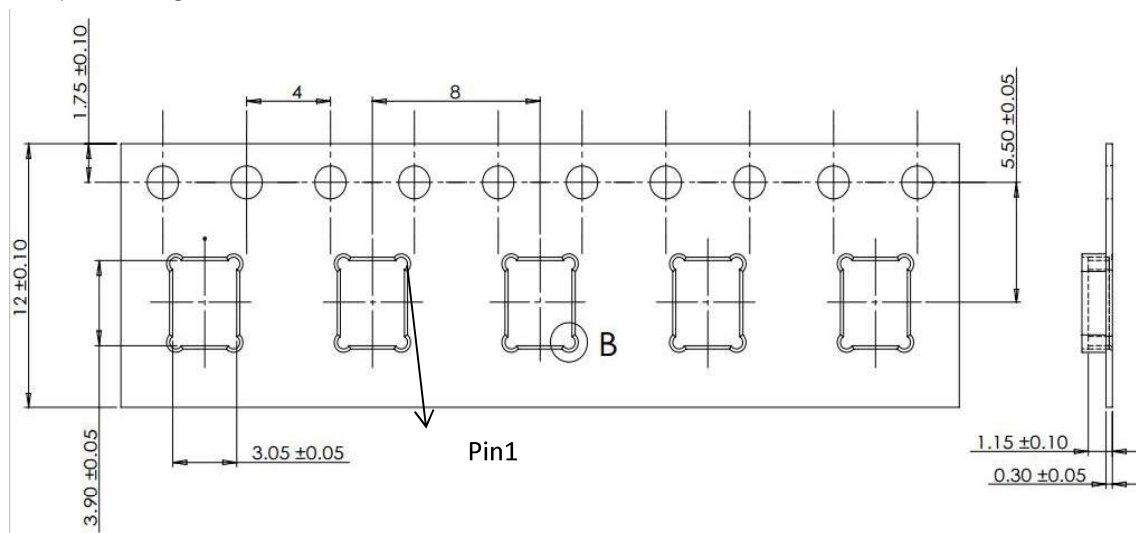


Fig. 6 Packaging

The Content of Box:

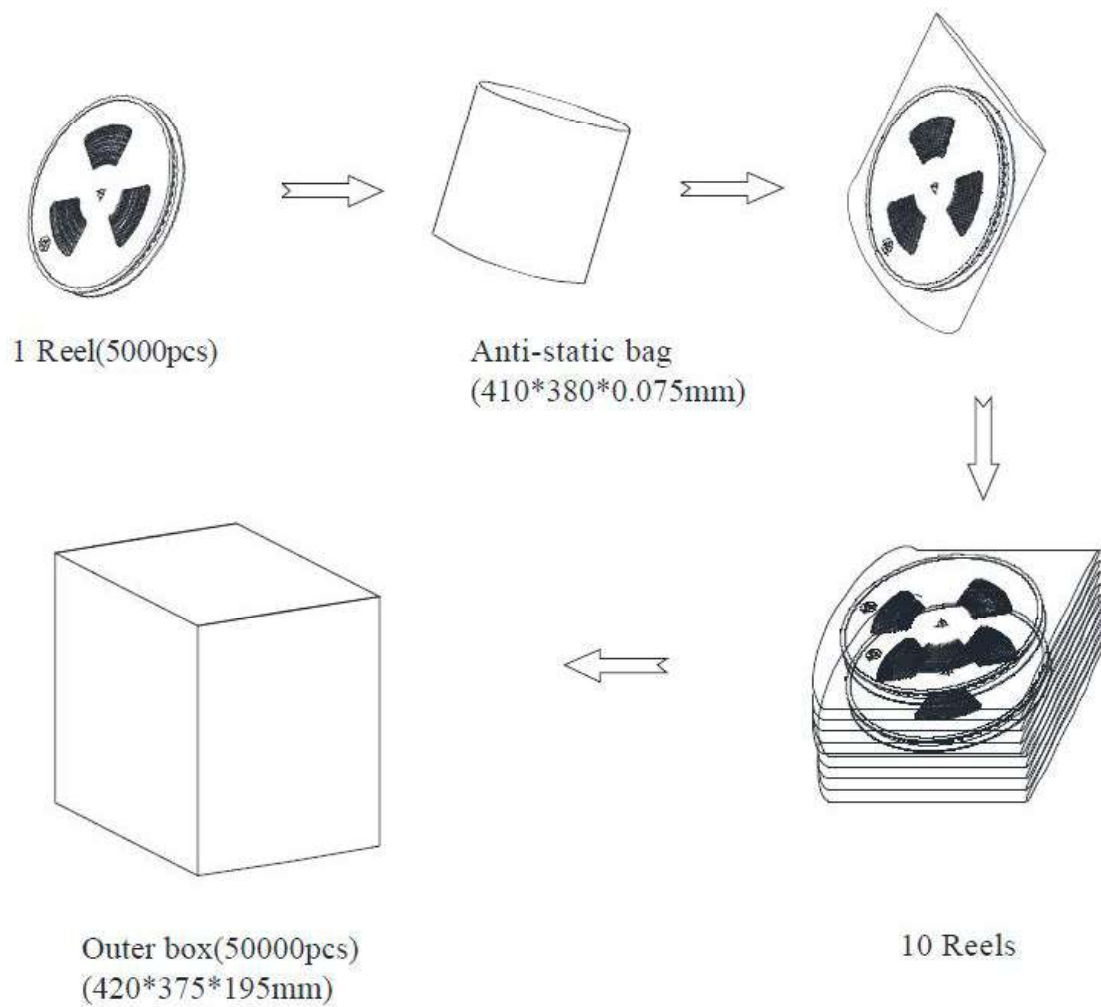

Reel	5,000PCS×1=5,000PCS
Outer Box	5,000PCS×10=50,000PCS

9. Typical Application Circuit:

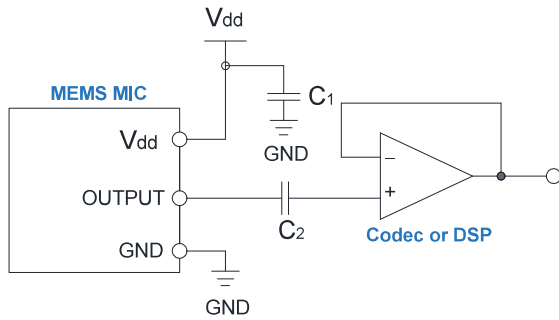


Fig. 7 Single ended input interface circuit

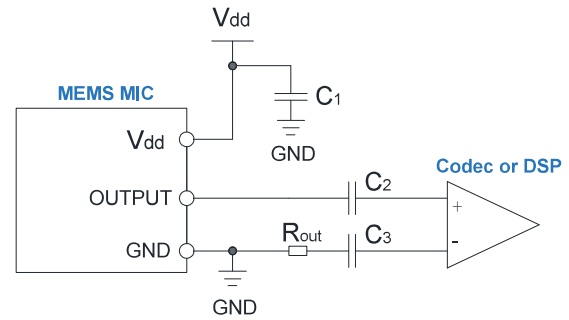


Fig. 8 Differential input interface circuit

Notes:

1. A 0.1uF ceramic type decoupling capacitor C₁ is strongly recommended for every microphone and it should be placed as close to the VDD pad to reduce the noise on power supply;
2. DC-blocking capacitor C₂/C₃ is required on the output signal line. The 3-dB cut-off frequency can be calculated using follow equation which is related to DC-blocking capacitor C₂ and input resistance of the input amplifier.

$$3dB \text{ cut-off frequency} = 1/2\pi R_L C_2$$

In order to get a cut-off frequency below 20 Hz, minimum 1uF value of C₂ and minimum 20KΩ value of input resistance of the input amplifier is recommended.

3. In general, the output trace should be kept as short as possible, differential input application can eliminate circuit interference better.

10. Cautions

10.1 Board Wash Forbidden

- Do not board wash by liquid or ultrasonic after the reflow process, otherwise this could damage the microphone.

10.2 Negative Pressure Forbidden

- Do not pull a vacuum such as nozzle over port hole of the microphone.
- Do not vacuum seal static bags used to store unused portions of reels.

10.3 Blowing Forbidden

- Not to blow the acoustic port of the microphone directly, otherwise, this could damage the microphone. If have to, air pressure should less than 0.3MPa, distance more than 5cm, and time less than 5 seconds.

10.4 Rework

- 250°C~270°C, maximum 30 sec, Peak temperature 330°C.
- Wind speed: 15L/m.
- It is very important not to put a heatgun over the acoustic port of the microphone directly.

10.5 Other Application Notes

- Maximum of 3 reflow cycles is recommended.
- Suggest SMT the microphone at last time if double side PCBA used.
- Do not insert any object in port hole of device at any time.

10.6 Storage

- MSL (moisture sensitivity level) Class 1.
- Twelve months when devices are to be stored in factory supplied, unopened ESD moisture sensitive bag under maximum environmental conditions of 30° C, 70% R.H. and floor life(out of bag) at factory no more than 4 weeks.
- Keep MEMS MIC in warehouse with less than 75% humidity and without sudden temperature change, acid air, any other harmful air or strong magnetic field.
- Please take proper measures against ESD in the process of assembly and transportation.
- Please use the shipping package for long-term storage.