

This product is completed the lead-free and RoHS.



DATA SHEET




SAMWHA ELECTRIC CO., LTD.

Aluminum Electrolytic Capacitors

Date : 2024. 10. 17.

Ident-No : SC-ARM4552

Part No : UR 2G 335 M 10010 VR

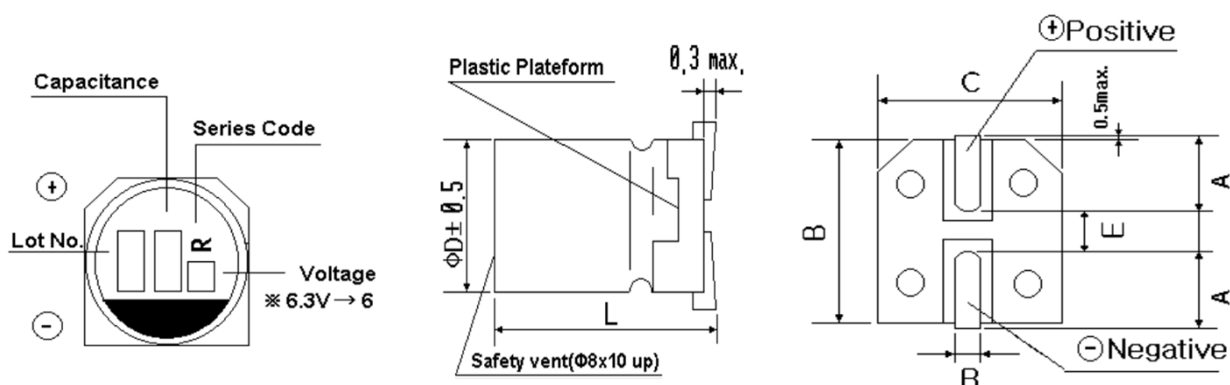

ΦD	L±0.5	B±0.2	C±0.2	E±0.2	A±0.2	R
10	10	10.3	10.3	4.5	3.2	0.8~1.1

Dimensions of ΦD & L

Capacitance at 120Hz, 20℃	3.3 μF
Tolerance at 120Hz, 20℃	-20% ~ +20%
Rated Voltage	400 V
Surge Voltage	450 V
Ripple current at 120Hz, 125℃	37 mA rms
Leakage current after 2 minute	152.8 μA
Dissipation factor (tanδ) at 120Hz, 20℃	0.24
E.S.R at 120Hz, 20℃	96.46 Ω
Temperature range	-40 ~ +125℃
Load life at 125℃	2000 hours
Shelf life at 125℃	1000 hours

Approved K. C. Eom *k. c. Eom*

Technical team manager