


SMD Type

MAGNETIC TRANSDUCER

KSSGI3J12-A




Dimension

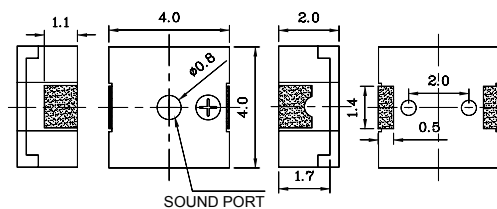

Tol: ± 0.5 Unit: mm

Characteristic

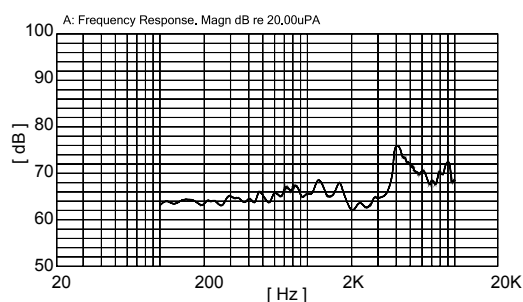

Rated Frequency (Hz)	4,000
Rated Voltage (Vo-p)	3.0
Current Consumption (mA)	Max. 90
Sound Pressure Level (dB)	Min. 70@10cm
Coli Resistance (Ω)	20.0 ± 3.0
Operating Temperature ($^{\circ}\text{C}$)	$-20 \sim +70$
Storage Temperature ($^{\circ}\text{C}$)	$-30 \sim +80$
Dimension (mm)	L4.0xW4.0xH2.0
Material	L.C.P (Black)


SMD Type

MAGNETIC TRANSDUCER

KSSG33J12-3




Dimension

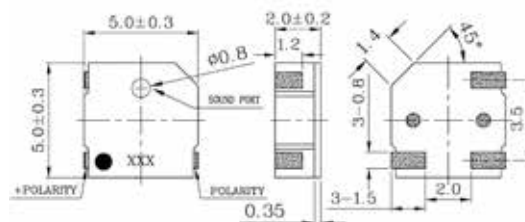

Tol: ± 0.5 Unit: mm

Characteristic

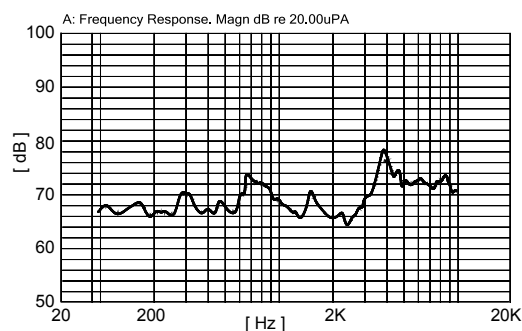

Rated Frequency (Hz)	4,000
Rated Voltage (Vo-p)	3.0
Current Consumption (mA)	Max. 110
Sound Pressure Level (dB)	Min. 75@10cm
Coli Resistance (Ω)	12.0 ± 3.0
Operating Temperature ($^{\circ}\text{C}$)	$-20 \sim +70$
Storage Temperature ($^{\circ}\text{C}$)	$-30 \sim +80$
Dimension (mm)	L5.0xW5.0xH2.0
Material	L.C.P (Black)