



Terminal Blocks


New Products



PL-Standard

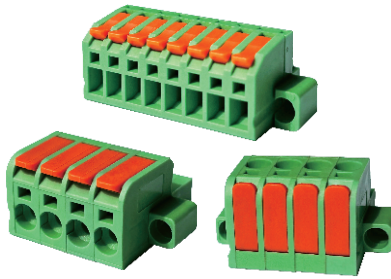


PL-With Flange

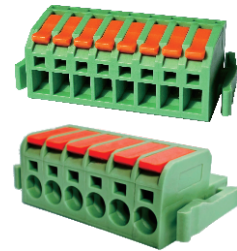

PL-With Hook

- Using the latest **PUSH-IN** technology, the wiring efficiency is increased by 70%.
- Multiple clamping units can be kept open at the same time, simplifying the connection of multi-core cables.
- To maintain a long-term reliable connection, the spring connection ensures the stability of the wire.
- Next-generation Intuitive Tool-free Operation.
- Provide sound feedback when wiring, convenient and fast.
- The lever position indicates the connection status.

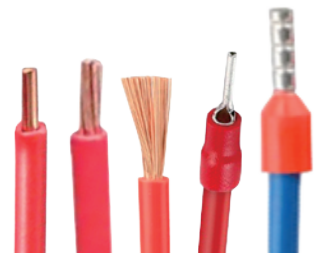


Used for the above types of copper wires

Electrical

Orientation

Rated Parameters	cULus
Product Model	PL
Pitch	3.5/3.81/5.08mm
Poles	2-16P/2-24P
Voltage Rating	300V/300V
Current Rating	10A/20A
Solid Wire	16-24AWG/12-24 AWG
Stranded Wire	16-24AWG/12-24 AWG
Wire Strip Length	11mm
Safety Approval	cULus
Standard Colors	

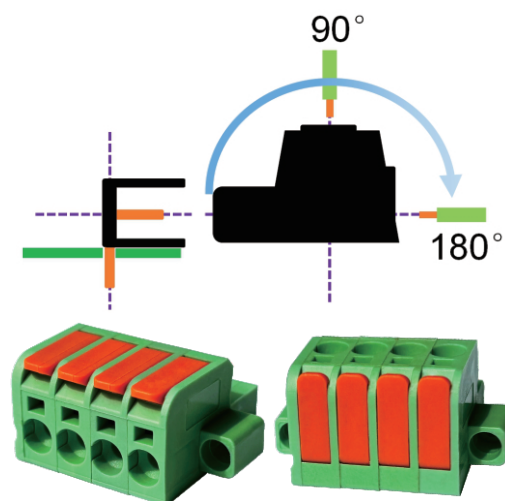

PL	XX Number of contacts	X Pitch	X Body Color	X Lever Color	X Body Type	X Wire Insertion Direction	X	X	X	X	X
02: 2 Poles 03: 3 Poles 04: 4 Poles 05: 5 Poles ... 24: 24 Poles	1: 3.5 mm 3: 3.81 mm 5: 5.08 mm	0: Black 1: Natural Color 2: Red 3: Orange 4: Yellow 5: Green (RAL6018/T) 6: Blue 8: Grey 9: White C: Green (RAL 6018/U)	0: Black 1: Natural Color 2: Red 3: Orange 4: Yellow 5: Green (RAL6018/T) 6: Blue 8: Grey 9: White C: Green (RAL 6018/U)	S: Standard H: With Hook F: With Flange	H: Horizontal 180D wire insertion V: Vertical 90D wire insertion	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy (High current)				

Application Scenarios



PV Inverter



EV Charging Station



Electrical Automation



Industrial Automation