

Crystal OSCILLATOR

3.2 X2.5MM Surface Mount Package



Approved by:
Checked by:
Issued by:

SPECIFICATION

P/N: 3N5000000001MBL

深圳市晶科鑫实业有限公司
SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD.

Tel: 86-755-88352809
E-mail: sjksale@126.com

Fax: 86-755-88353718
URL: [Http://www.q-crystal.com](http://www.q-crystal.com)

Crystal OSCILLATOR

3.2 X2.5MM Surface Mount Package



FEATURE

- Compact and thin ceramic package with metalized surface mounting and automatically loaded
- Reflow solder is possible
- Lower noise and current with reduced power consumption
- Built-in C-MOS IC with tri-state function


ELECTRICAL SPECIFICATIONS

Parameters	Condition\Model	
Fan Out Type		HCMOS
Supply Voltage		3.3V±10%
Frequency		50.000MHz
Operating Temperature		-20℃ ~ +70℃
Input Current	Frequency Range	10mA max
Frequency Stability	All Conditions	±50ppm
Symmetry	AT 1/2 Vdd	45/55%
Output Voltage	Vol(max)	10%Vdd
	VoH(min)	90%Vdd
Rise/Fall Time	AT 0.1Vdd~0.9Vdd	10ns Max
Driving Ability	CMOS load max	15pF
Start-up Time	Load RANGE	10ns max
E/D Function	#1 OPEN	PIN #3 ACTIVE
	#1 >=70%Vdd	PIN #3 ACTIVE
	#1 <=30%Vdd	PIN #3 HighZ
PAD Connection		PIN#1 E/D
		PIN#2 GND
		PIN#3 OUT
		PIN#4 Vdd

Reflow Soldering Profile

Total Time: 200 sec. Max.

Solder Melting Point :220 ℃

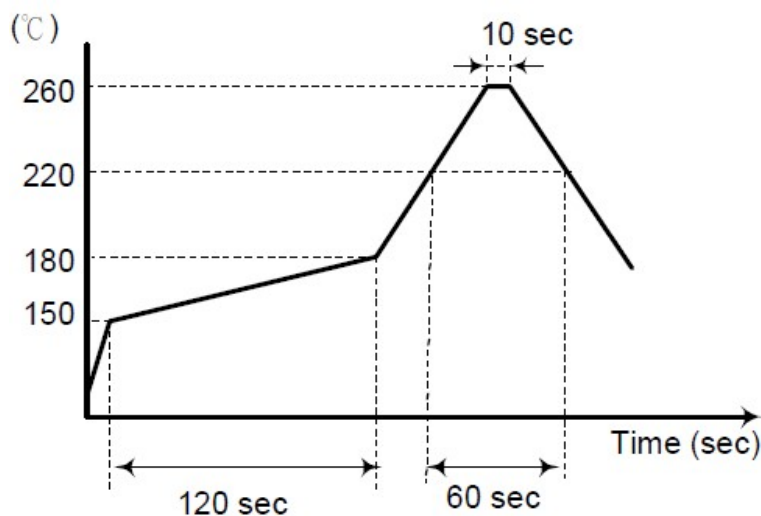


The design, manufacturing process, and specifications of this device are subject to change without notice.

Crystal OSCILLATOR


3.2 X2.5MM Surface Mount Package



Dimension (Unit: mm)

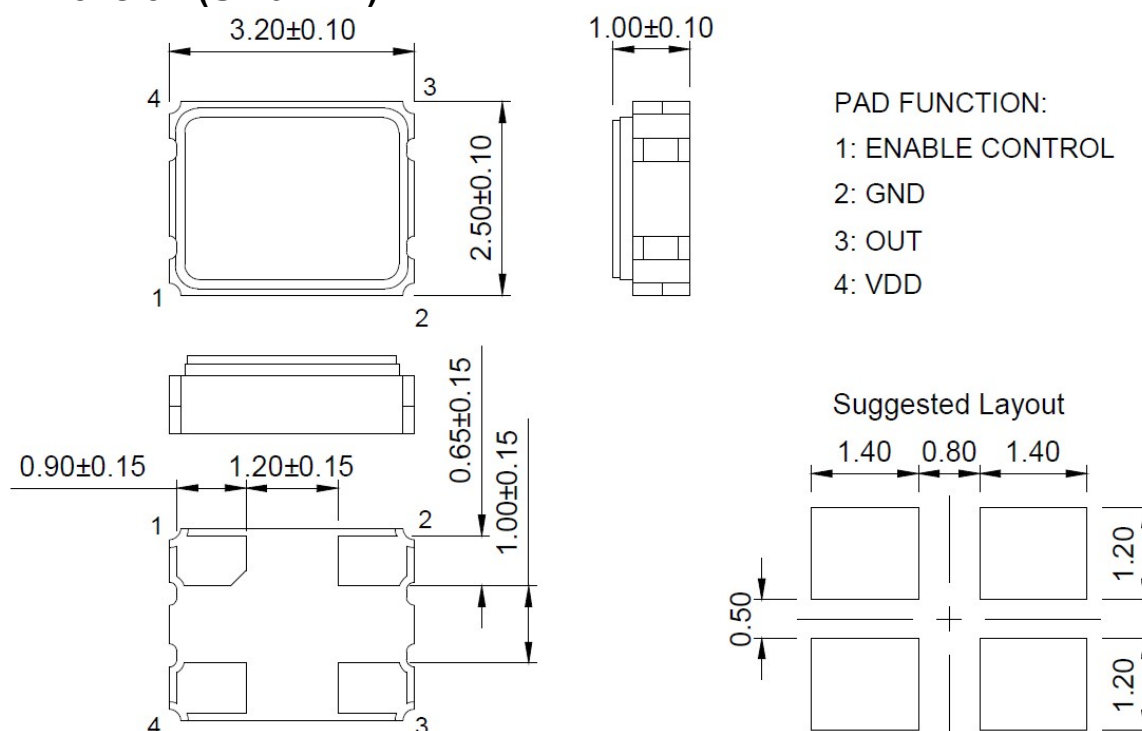

Waveform Conditions

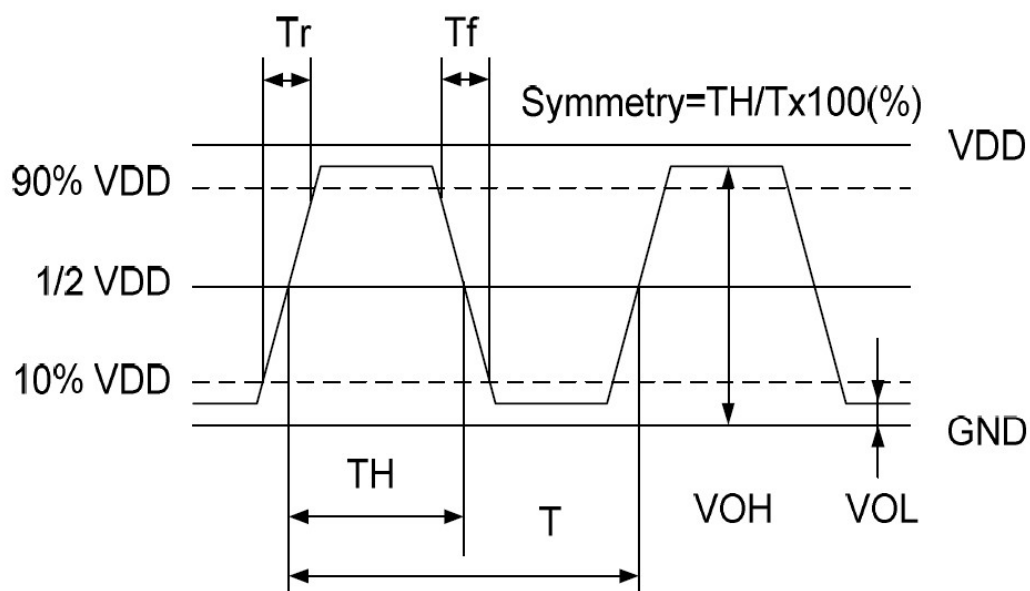


The design, manufacturing process, and specifications of this device are subject to change without notice.

Crystal OSCILLATOR

3.2 X2.5MM Surface Mount Package






Tape Dimension

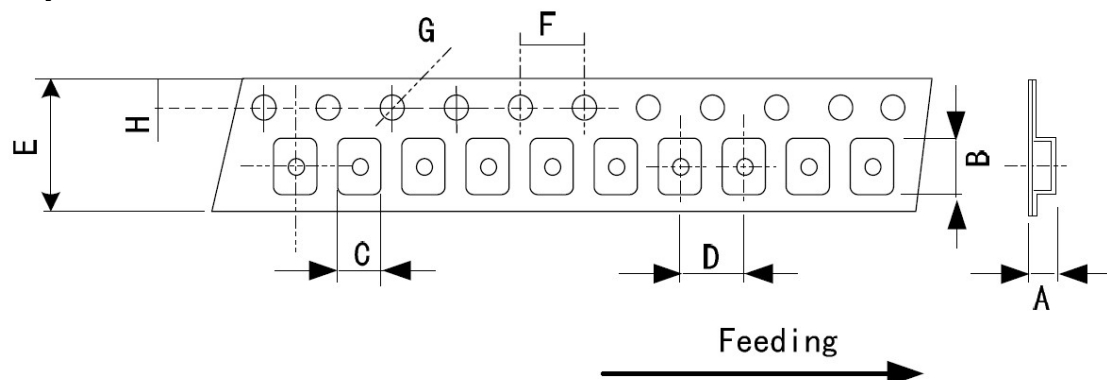

DIMENSIONS	A	B	C	D	E	F	G	H	(UNIT:mm)
	1.65 ±0.10	3.40 ±0.10	2.70 ±0.10	4.00 ±0.10	8.00 ±0.20	4.00 ±0.10	1.55 ±0.05	1.75 ±0.10	

REMARK :

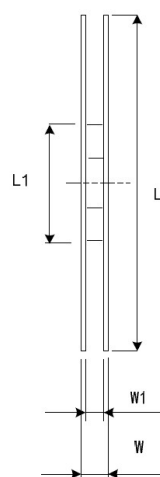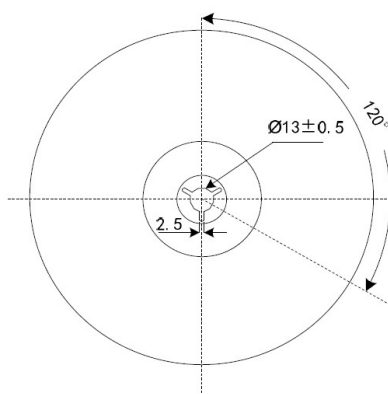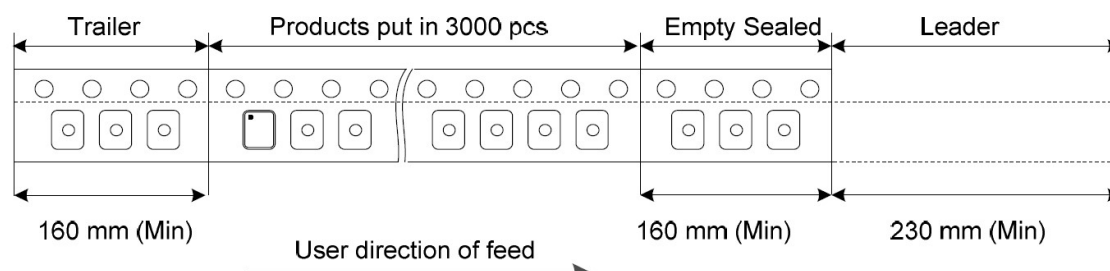

DIMENSIONS	L	L1	W	W1	Standard Reel Quantity is 3,000 pcs per reel (UNIT:mm)
	178 ±1.00	60.2 ±0.50	11.5 ±0.2	8 +1/-0	

The design, manufacturing process, and specifications of this device are subject to change without notice.