

Crystal OSCILLATOR

7.0 X5.0MM Surface Mount Package



Approved by:
Checked by:
Issued by:

SPECIFICATION

P/N: 6N0491520C02MBL

深圳市晶科鑫实业有限公司
SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD.

Tel: 86-755-88352809
E-mail: sjksale@126.com

Fax: 86-755-88353718
URL: [Http://www.q-crystal.com](http://www.q-crystal.com)

Crystal OSCILLATOR

7.0 X5.0MM Surface Mount Package



FEATURE

- Broad frequency ranges from 1.00MHz to 150MHz
- Compact and thin ceramic package with metalized surface mounting and automatically loaded
- Reflow solder is possible
- Lower noise and current with reduced power consumption
- Built-in C-MOS IC with tri-state function
- 5V and 3.3V supply model available


ELECTRICAL SPECIFICATIONS

Parameters		Condition	6N	
Fan Out Type			HCMOS	
Supply Voltage			5.0V±10%	
Frequency			4.9152MHz	
Operating Temperature			-40°C-85°C	
Input Current	Frequency Range		10mA max	
Frequency Stability	All Conditions		±50ppm	
Symmetry	AT 1/2 Vdd		45/55%	
Output Voltage	Vol(max)		10%Vdd	
	VoH(min)		90%Vdd	
Rise/Fall Time	AT 0.1Vdd~0.9Vdd		10ns Max	
Driving Ability	CMOS load max		50pF	
Start-up Time	Load RANGE		10ms max	
E/D Function	#1 OPEN		PIN #3 ACTIVE	
	#1 >=70%Vdd		PIN #3 ACTIVE	
	#1 <=30%Vdd		PIN #3 HighZ	
PAD Connection			PIN#1 E/D	PIN#3 OUT
			PIN#2 GND	PIN#4 Vdd

Reflow Soldering Profile

Total Time: 200 sec. Max.

Solder Melting Point :220 °C

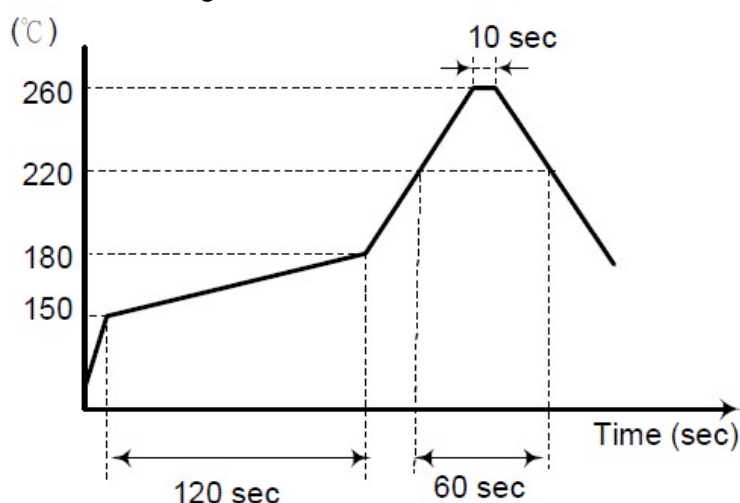


The design, manufacturing process, and specifications of this device are subject to change without notice.

Crystal OSCILLATOR



7.0 X5.0MM Surface Mount Package



DIMENSIONS (UNIT: mm)




Pad Function:
1:ENABLE CONTROL
2:GND
3:OUT
4:VDD

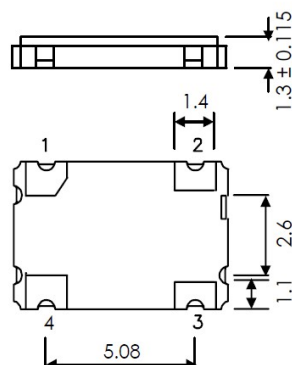


Suggested Layout

PACKING

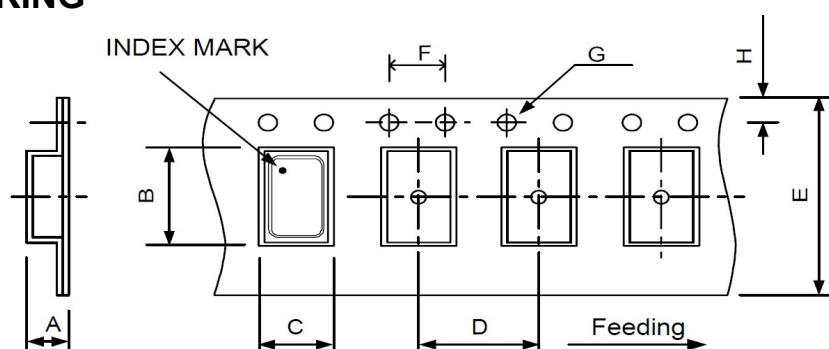

DIMENSIONS	A	B	C	D	E	F	G	H	(UNIT : mm)
	2.00	7.90	5.45	8.00	16.00	4.00	1.50	1.75	

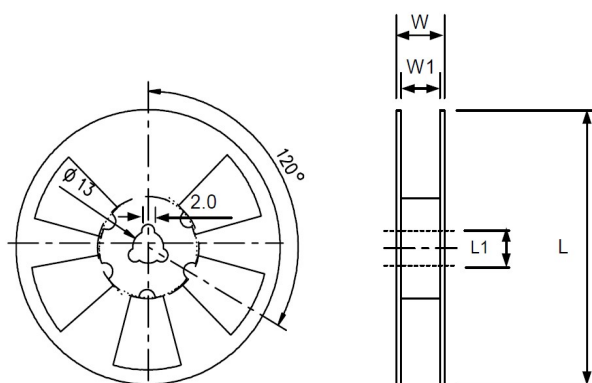

DIMENSIONS	L	L1	W	W1	pcs / Reel (UNIT : mm)
	180	13	20.5	16	Standard Reel Quantity is 1,000 pcs per reel