

CERAMIC RESONATOR

ZTT Series with Built-IN Capacitor



Approved by:

Checked by:

Issued by:

SPECIFICATION

P/N: ZTTCE8.00MGE10PGJM

深圳市晶科鑫实业有限公司
SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD.

Tel: 86-755-88352809
E-mail: sjksale@126.com

Fax: 86-755-88353718
URL: [Http://www.q-crystal.com](http://www.q-crystal.com)

CERAMIC RESONATOR



ZTT Series with Built-IN Capacitor

1. SCOPE

This specification shall cover the characteristics of the surface mount ceramic resonator with 8.00MHz.

2. CUSTOMER NO:

3. FACTORY NO: ZTTCE8.00MGE10PGJM

4. ELECTRICAL CHARACTERISTICS

No	Item	Requirements
4.1	Oscillation Frequency (Fosc)	8.00MHz
4.2	Resonant Impedance (Ro)	50Ω
4.3	Temperature Coefficient of Oscillation Frequency	±0.5% max
4.4	Withstanding Voltage	50 VDC 1 minute
4.5	Rating Voltage (1) D.C. Voltage (2) A.C. Voltage	6 V.D.C. 15 Vpp.
4.6	Insulation Resistance	100M Ω min. (at 10VDC)
4.7	Operating Temperature	-40℃ to +125℃
4.8	Storage Temperature	-55℃ to +125℃
4.9	Aging Rate (Fosc)	±0.1% max (10 year)
4.10	C1C2	10pf±20%

5. MEASUREMENT

5.1 Measurement Condition


The reference temperature shall be 25℃±2℃. The measurement shall be performed at the temperature range of 5℃ to 35℃ unless otherwise the result is doubtful.

5.2 Measurement Circuit and Equipment

Oscillating frequency shall be measured by the standard test Circuit.

Resonant impedance shall be measured by HP8751A Network Analyzer.

Test Circuit

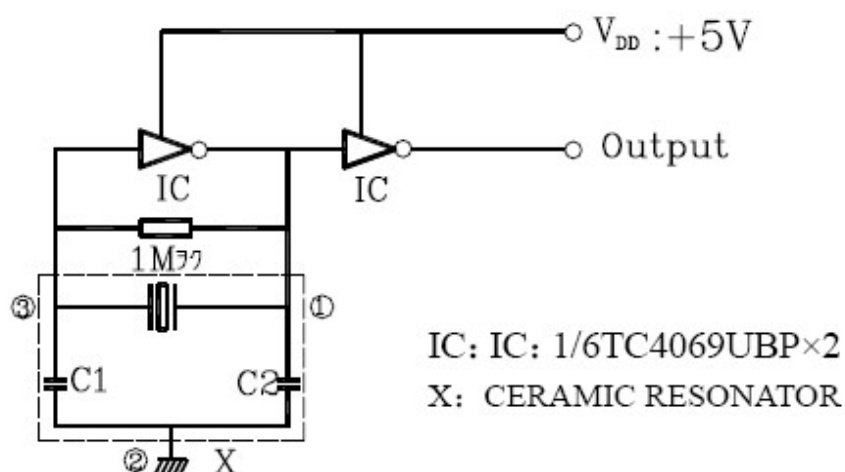


CERAMIC RESONATOR

ZTT Series with Built-IN Capacitor



6. DIMENSION (Unit: mm)

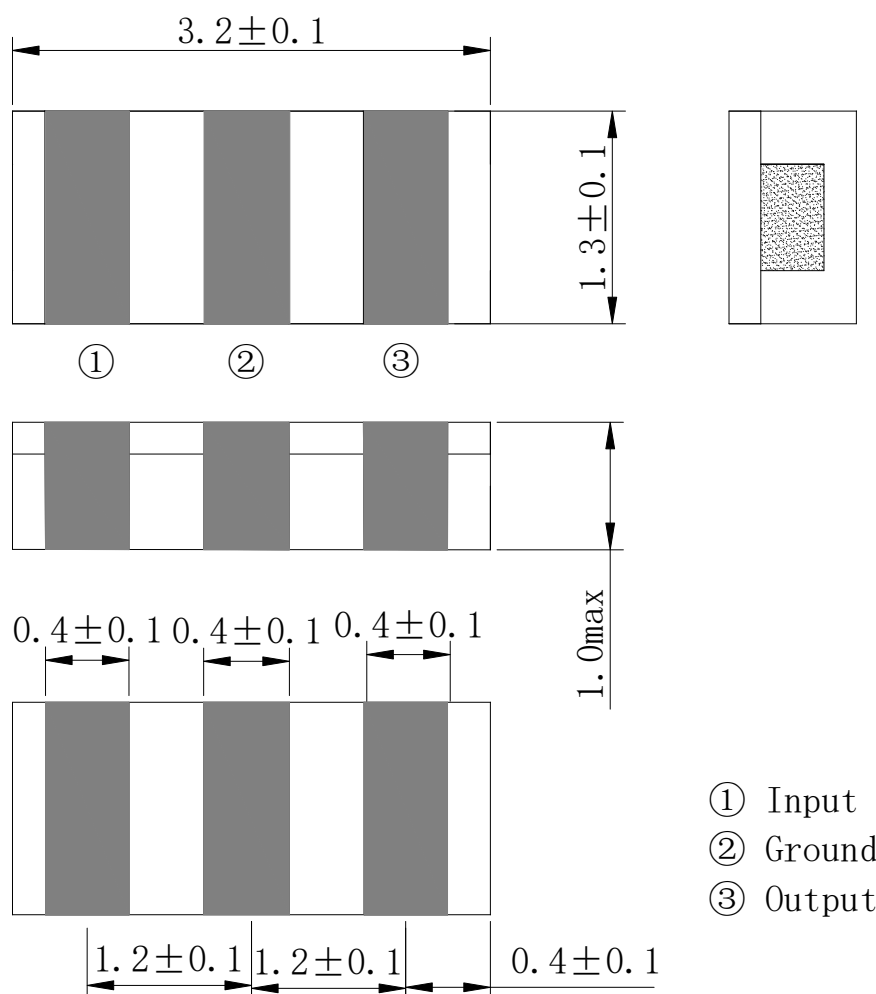

7. PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS

No	Item	Condition of Test	Performance Requirements
7.1	Humidity	Keep the resonator at $40 \pm 2^\circ\text{C}$ and 90-95% RH for 96 ± 4 hours. Then release the resonator into the room condition for 1 hour prior to the measurement.	It shall fulfill the specifications in Table 1.
7.2	Vibration	Subject the resonator to vibration for 2 hours each in x, y and z axis with the amplitude of 1.5mm, the frequency shall be varied uniformly between the limits of 10—55Hz.	It shall fulfill the specifications in Table 1.
7.3	Mechanical Shock	Drop the resonator randomly onto a wooden floor from the height of 100cm 3 times.	It shall fulfill the specifications in Table 1.

CERAMIC RESONATOR

ZTT Series with Built-IN Capacitor



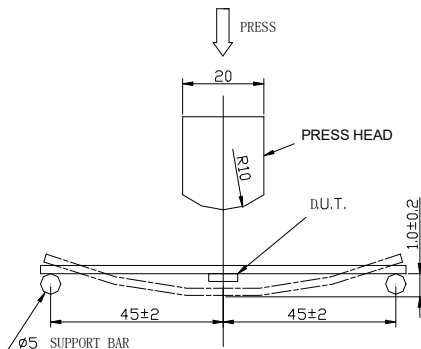
7.4	Soldering Test	Passed through the re-flow oven under the following condition and left at room temperature for 1 hour before measurement.	It shall fulfill the specifications in Table 1.	
		Temperature at the surface of the substrate		Time
		Preheat 150±5℃		60±10 sec
		Peak 240±5℃		10±3 sec
7.5	Solder ability	Dipped in 230±5℃ solder bath for 3±0.5 sec seconds with rosin flux (25wt% ethanol solution).	The terminals shall be at least 95% covered by solder.	
7.6	High Temperature Exposure	Subject the resonator to 80±5℃ for 96±4 hours. Then release the resonator into the room conditions for 1 hour prior to the measurement.	It shall fulfill the specifications in Table 1.	
7.7	Low Temperature Exposure	Subject the resonator to -20±5℃ for 96±4 hours. Then release the resonator into the room conditions for 1 hour prior to the measurement.	It shall fulfill the specifications in Table 1.	
7.8	Temperature Cycling	Subject the resonator to -40℃ for 30 min. followed by a high temperature of 85℃ for 30 min. cycling shall be repeated 5 times with a transfer time of 15 sec. At the room temperature for 1 hour prior to the measurement.	It shall fulfill the specifications in Table 1.	
7.9	Board Bending	Mount a glass-epoxy board (width=40mm, thickness=1.6mm), then bend it to 1mm displacement and keep it for 5 seconds. (See the following figure) 	Mechanical damage such as breaks shall not occur.	

TABLE 1

Item	Specification
Oscillation Frequency Change	$\Delta F/F_{osc} = 0.3\% \text{ max}$
Resonant Impedance	Within $\pm 10\Omega$


CERAMIC RESONATOR



ZTT Series with Built-IN Capacitor


8. RECOMMENDED LAND PATTERN AND REFLOW SOLDERING STANDARD CONDITIONS

8.1 RECOMMENDED LAND PATTERN

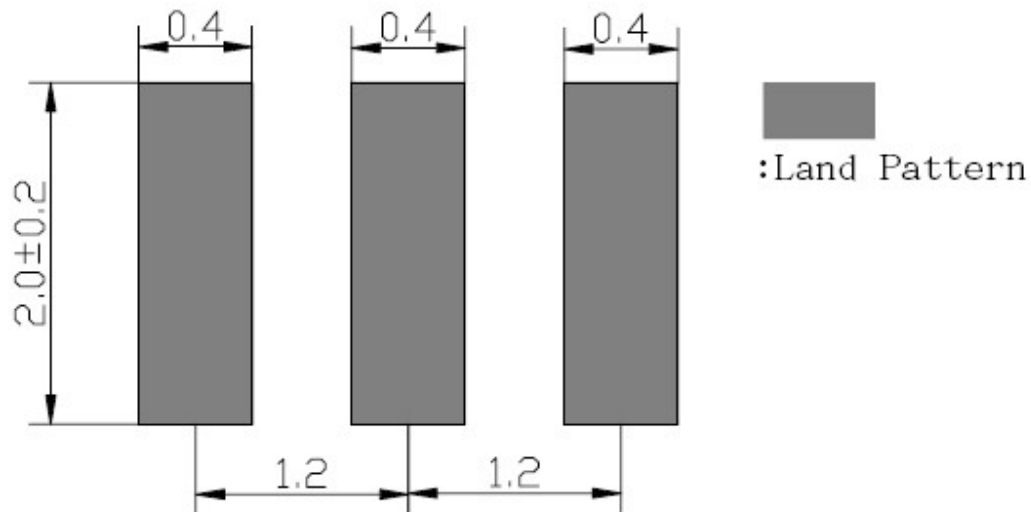

8.2 RECOMMENDED REFLOW SOLDERING STANDARD CONDITIONS

Tem. ($^{\circ}$ C)

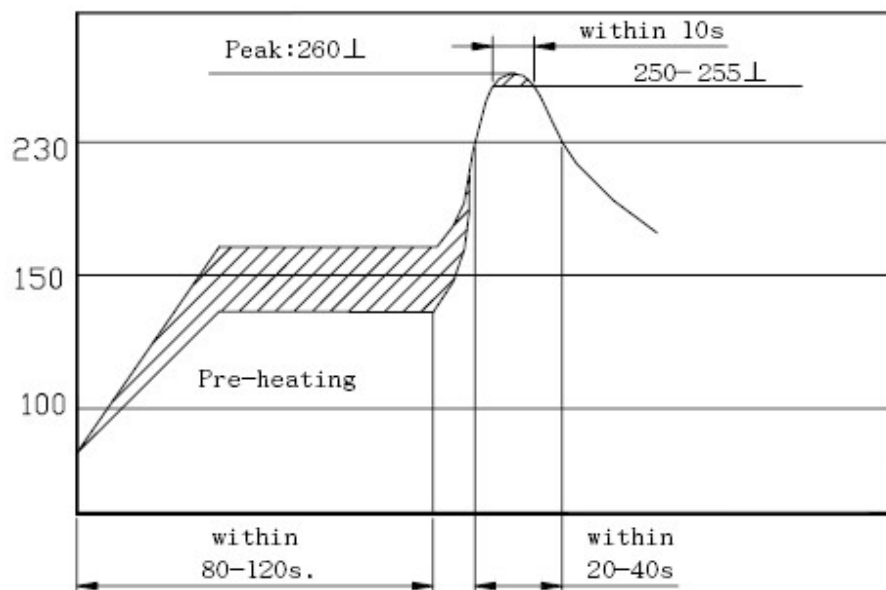

9. REVIEW OF SPECIFICATIONS

When something gets doubtful with this specification, we shall jointly work to get an agreement.