

Crystal OSCILLATOR

2.5 X2. 0MM Surface Mount Package



Approved by:

Checked by:

Issued by:

SPECIFICATION

P/N: 2N160000DC0XGJM

深圳市晶科鑫实业有限公司
SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD.

Tel: 86-755-88352809
E-mail: sjksale@126.com

Fax: 86-755-88353718
URL: [Http://www.q-crystal.com](http://www.q-crystal.com)

Crystal OSCILLATOR

2.5 X2.0MM Surface Mount Package




FEATURE

- Broad frequency ranges from 1.54Mhz to 100MHz
- Compact and thin ceramic package with metalized surface mounting and automatically loaded
- Reflow solder is possible
- Lower noise and current with reduced power consumption
- Built-in C-MOS IC with tri-state function
- 1.8~ 3.3V supply model available

ELECTRICAL SPECIFICATIONS

Parameters	Condition\Model	2N	
Fan Out Type		HCMOS	
Supply Voltage		1.8~3.3V	
Frequency		16.000MHz	
Operating Temperature		-40℃ ~ +85℃	
Input Current	Frequency Range	6.0mA max	
Frequency Stability	All Conditions	±25ppm	
Symmetry	AT 1/2 Vdd	45/55%	
Output Voltage	Vol(max)	10%Vdd	
	VoH(min)	90%Vdd	
Rise/Fall Time	AT 0.1Vdd~0.9Vdd	10ns Max	
Driving Ability	CMOS load max	15pF	
Start-up Time	Load RANGE	10ms max	
E/D Function	#1 OPEN	PIN #3 ACTIVE	
	#1 >=70%Vdd	PIN #3 ACTIVE	
	#1 <=30%Vdd	PIN #3 HighZ	
PAD Connection		PIN#1 E/D	PIN#3 OUT
		PIN#2 GND	PIN#4 Vdd

Reflow Soldering Profile

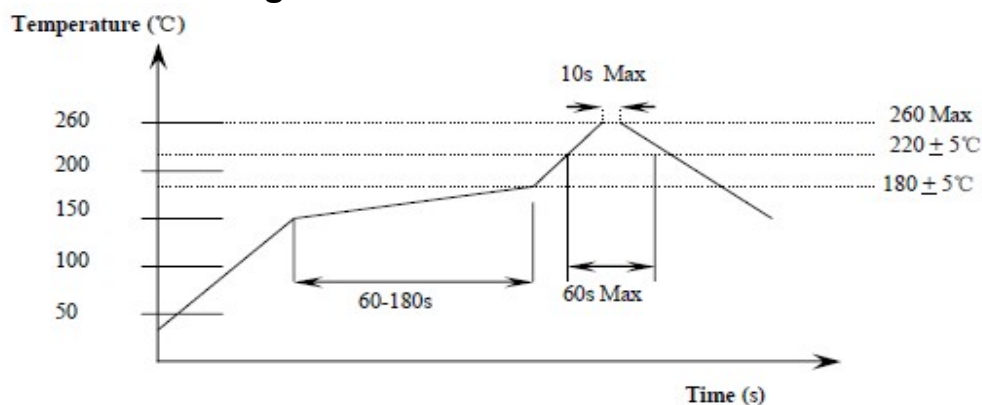


The design, manufacturing process, and specifications of this device are subject to change without notice.

Crystal OSCILLATOR


2.5 X2.0MM Surface Mount Package



Dimension

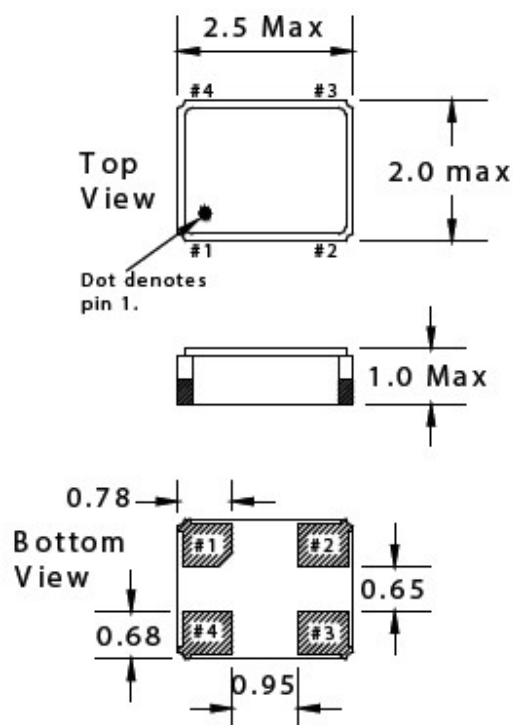

Recommended Solder Pad Layout

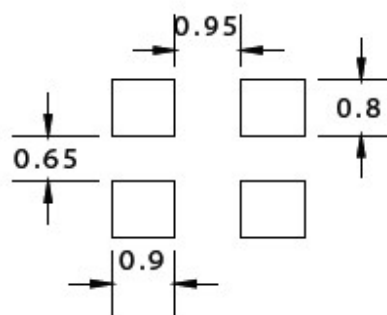


All dimensions are in millimeters.

Pin Connections

#1 E/D #3 Output
#2 GND #4 VDD

Waveform Conditions

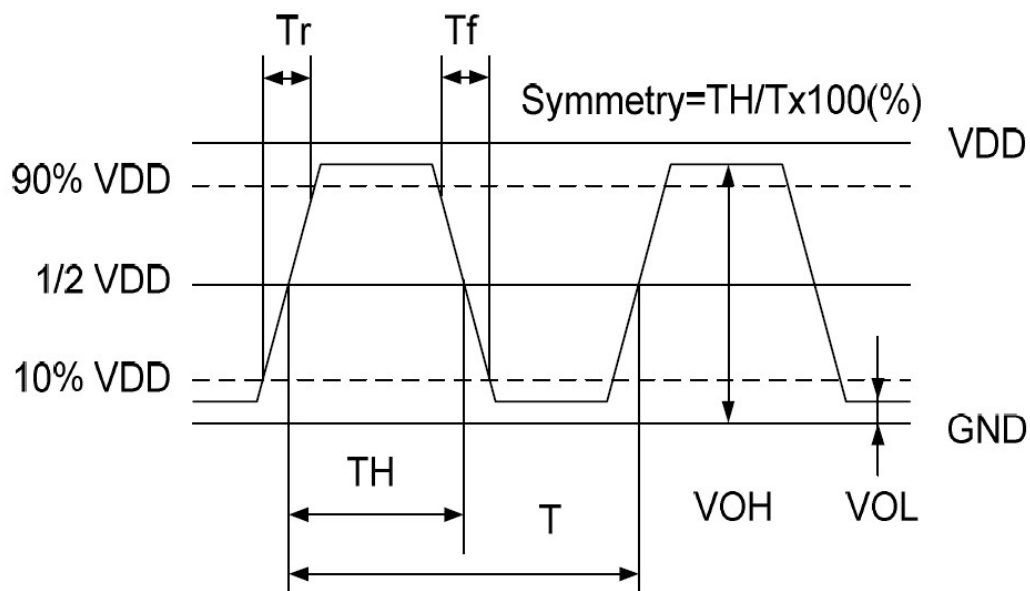


The design, manufacturing process, and specifications of this device are subject to change without notice.

Crystal OSCILLATOR

2.5 X2.0MM Surface Mount Package






Tape Dimension

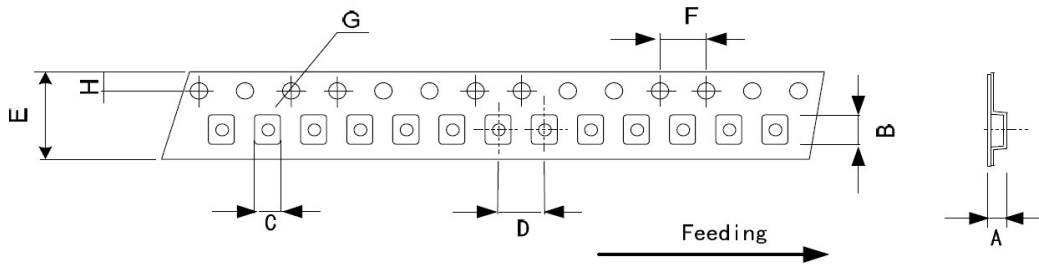

DIMENSIONS	A	B	C	D	E	F	G	H	(UNIT:mm)
	1.15	2.70	2.25	4.00	8.00	4.00	1.55	1.75	
	±0.05	±0.05	±0.05	±0.10	±0.20	±0.10	±0.05	±0.10	

REMARK :

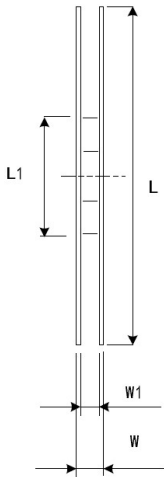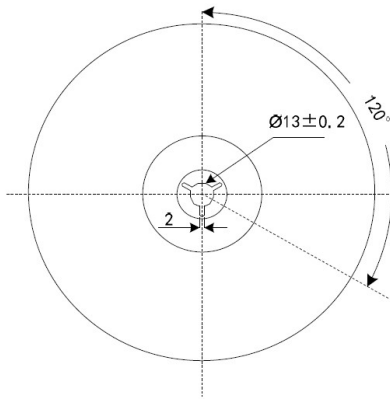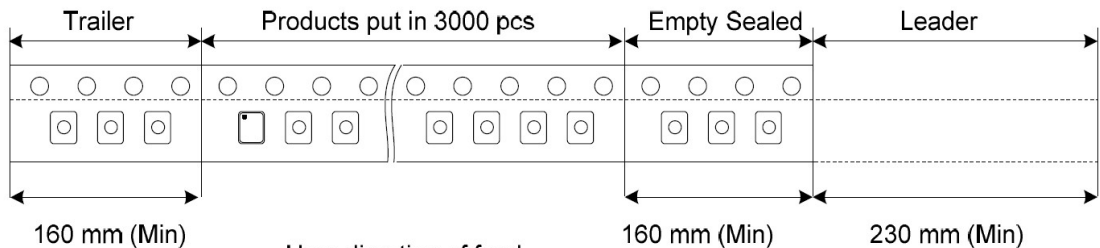

DIMENSIONS	L	L1	W	W1	Standard Reel Quantity is 3,000 pcs per reel (UNIT:mm)
	180	60	11.4	9	
	0/-3	+1/0	±0.1	±0.3	