

QUARTZ CRYSTAL UNIT

SEAM SEALED CERAMIC 1.6x1.2MM SMD TYPE



Approved by:

Checked by:

Issued by:

SPECIFICATION

P/N: 7Y4800000C08MBL

深圳市晶科鑫实业有限公司
SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD.

Tel: 86-755-88352809
E-mail: sjksale@126.com

Fax: 86-755-88353718
URL: [Http://www.q-crystal.com](http://www.q-crystal.com)

QUARTZ CRYSTAL UNIT

SEAM SEALED CERAMIC 1.6x1.2MM SMD TYPE



FEATURE


- Ultra thin, thickness 0.4mm
- Leadless type
- High precision characteristic covering up to high frequency range
- Designed for automatic mounting and reflow soldering
- Embossed tapping specification
- The best choice of Bluetooth wireless communication sets, DSN, PDA and mobile phone

ELECTRICAL SPECIFICATIONS

Output Frequency Range	48.000MHz
Mode	AT/Fundamental
Frequency Tolerance (at 25°C)	±20ppm
Frequency Stability Over Operating Temperature Characteristics	±20ppm
Operating Temperature Range	-40 °C to +85 °C
Storage Temperature Range	-55 °C to +105 °C
Shunt Capacitance (C ₀)	5.0 pF Max
Driver Level (Typical)	100μW
Load Capacitance (C _L)	8 pF
Equivalent series resistance	80 Ω Max
Aging @25°C 1 st year (Max)	±1ppm/year
Shock Resistance	Drop test of 3 times on 2mm stainless plate from 75cm height

REMARK: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. PLEASE CONFIRM WITH OUR SALES ENGINEER.

Dimension (mm)

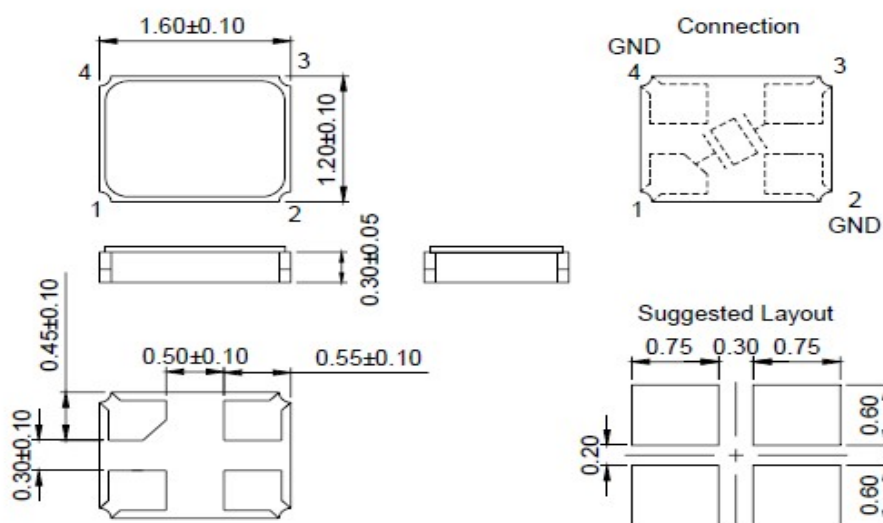

The design, manufacturing process, and specifications of this device are subject to change without notice.

QUARTZ CRYSTAL UNIT


SEAM SEALED CERAMIC 1.6x1.2MM SMD TYPE




Reflow Condition

Total Time: 200 sec. Max.


Solder Melting Point :220 °C

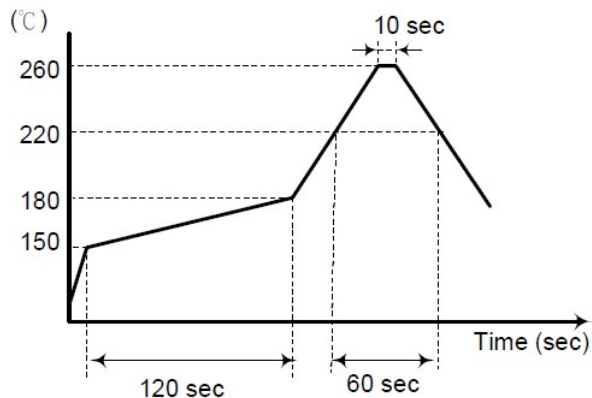

PACKING

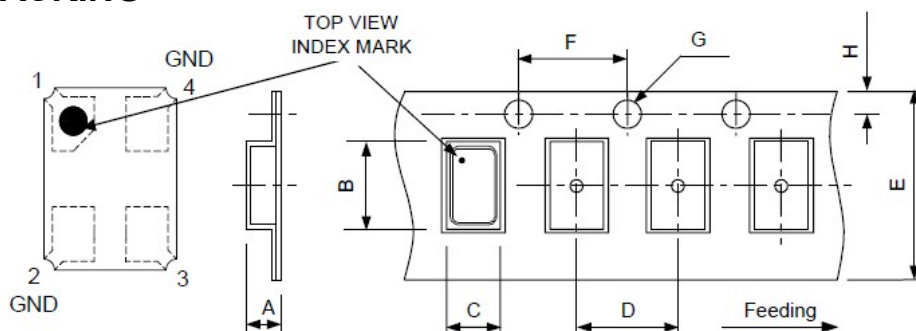

DIMENSIONS	A	B	C	D	E	F	G	H	(UNIT : mm)
	0.75 ± 0.15	1.85 ± 0.1	1.45 ± 0.1	4 ± 0.1	8 ± 0.2	4 ± 0.1	1.55 ± 0.05	1.75 ± 0.1	

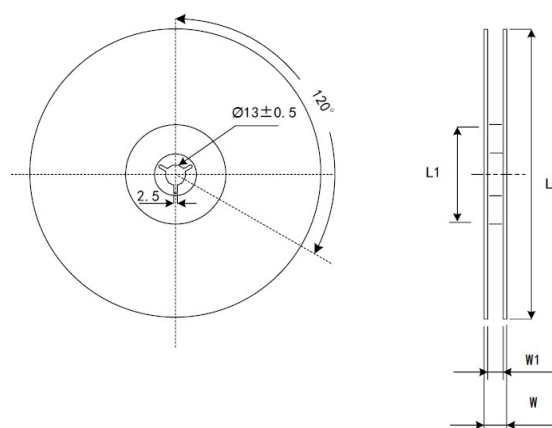

DIMENSIONS	L	L1	W	W1	Standard Reel Quantity is 3,000 pcs per reel (UNIT:mm)
	178 ±1.00	60.2 ±0.50	11.5 ±0.20	8 +1.00/-0.00	