


SCHEMATIC
OFF-(ON) SPST ILLUMINATED
() DENOTES MOMENTARY




RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 5.0 [0.20 in]




NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 50mA 24VDC
6. ELECTRIC LIFE: 500,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1000 M Ω MIN.
8. DIELECTRIC STRENGTH: 250 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 100m Ω MAX.
10. OPERATING TEMP.: -40°C TO +85°C
11. TRAVEL: 0.5 [0.02 in]
12. ▲ DENOTES CRITICAL PARAMETER.
13. INGRESS PROTECTION: IP65
- ▲ 14. LED VOLTAGE: 2.8V
15. HARDWARE SUPPLIED: O-RING AND HEXNUT
- ▲ 16. USE P/N'S DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS

SWITCH	CONNECTOR	WIRE
SW1-1	P1-1	TRIUMPH CABLE, HO5SS-F 4X0.5mm ² 180° 300/500V, YELLOW
SW1-2	P1-3	TRIUMPH CABLE, HO5SS-F 4X0.5mm ² 180° 300/500V, GREEN
SW1- (+)	P1-4	TRIUMPH CABLE, HO5SS-F 4X0.5mm ² 180° 300/500V, RED
SW1- (-)	P1-2	TRIUMPH CABLE, HO5SS-F 4X0.5mm ² 180° 300/500V, BLACK



▲ RING
ILLUMINATION COLOR:
WHITE

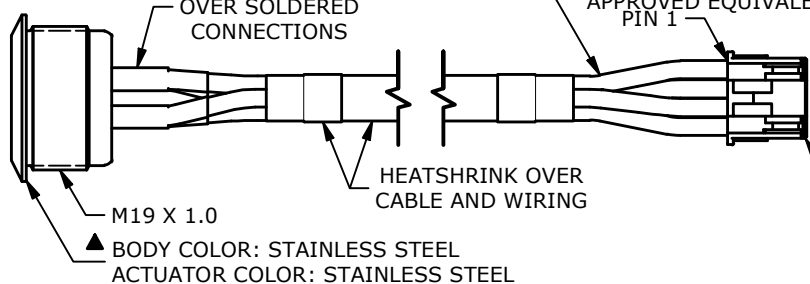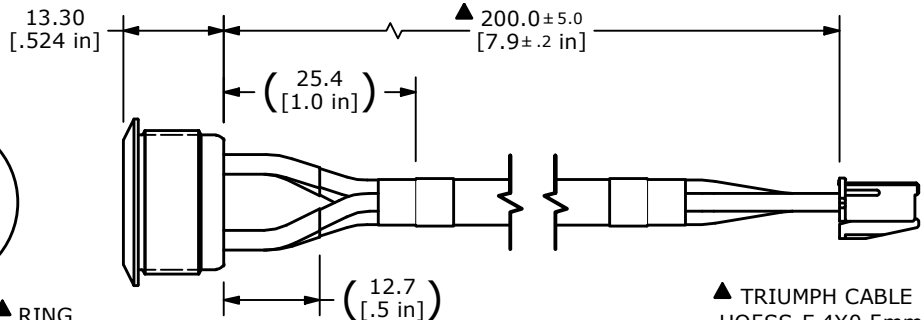

BOTTOM VIEW
SHOWN WITHOUT WIRING
AND CONNECTOR

REV	ECO NO	DESCRIPTION	DATE	BY					OBJECT ID
					TITLE PVT4FS4SS301-WA200MM				100132282
					SCALE	DATE	DR	DWG	REV
					1:1	4/6/2026	MJR	XH0254	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED