| | |
|---|---|
| BELOW 10 mm | ± 0.3 |
| 10~100 mm | ± 0.5 |
| ABOVE 100 mm | ± 0.8 |
| ANGLE | ± 3° |




## CIRCUIT DIAGRAM




## LED SCHEMATIC




## KNOB










## P.C.B. LAYOUT

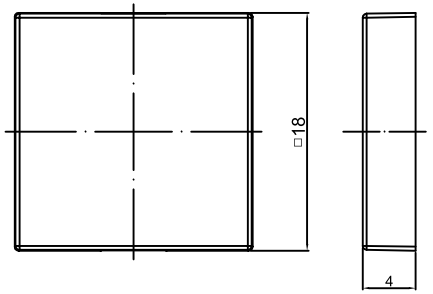


## SWITCH










### DIFFUSER PLANT COLOR

| | | | |
|---|---|---|---|
| G | GREEN | Y | YELLOW |
| R | RED | B | BLUE |
| T | TRANSPARENT | W | WHITE |
| X | WITHOUT | | |

### CAP COLOR

| | | | |
|---|---|---|---|
| G | GREEN | Y | YELLOW |
| R | RED | B | BLUE |
| T | TRANSPARENT | W | WHITE |
| X | WITHOUT | | |

SPECIFICATION :

1. RATING : 12 VDC,50mA .
2. CONTACT RESISTANCE : 100m Ω MAX
3. INSULATION RESISTANCE:100M Ω MIN 500 V DC
4. OPERATING FORCE : 220 ± 50gf .
5. TOTAL TRAVEL : 0.3 ± 0.1mm
6. OPERATING TEMPERATURE: -40°C ~ 85°C
7. LIFE CYCLE : 100,000 CYCLES
8. CRITICAL DIMENSIONS:'A' ~ ' I'.

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 3 | | | | | DATA | 2026/7/7 | UNIT | mm | MODE | TACT SWITCH | WB Well Buying Industrial Co.,Ltd. |
| 2 | | | | | APPROVAL | KAVEN | SCALE | 1 : 1 | PART | TC012W-N11BHS4WT-F1-1 | |
| 1 | | | | | CONFIRM | TEREANCE | VIEW | | 2D FILE NAME | TC012W-N11BHS4WT-F1-1 | |
| | DATA | APPROVAL | DESIGN | ENGINEERING CHANGE DESCRIPTION | DESIGN | VANSUN | VER. | 01 | 3D FILE NAME | | |