





SCHEMATIC
SPDT - ON - (ON) ILLUMINATED
() DENOTES MOMENTARY

SWITCH	CONNECTOR	WIRE
SW1-1 (COM)	P1-1	TRIUMPH CABLE, HO5SS-F 4X0.5mm ² 180° 300/500V, YELLOW
SW1-2 (NO)	P1-3	TRIUMPH CABLE, HO5SS-F 4X0.5mm ² 180° 300/500V, GREEN
SW1- (+)	P1-4	TRIUMPH CABLE, HO5SS-F 4X0.5mm ² 180° 300/500V, RED
SW1- (-)	P1-2	TRIUMPH CABLE, HO5SS-F 4X0.5mm ² 180° 300/500V, BLACK

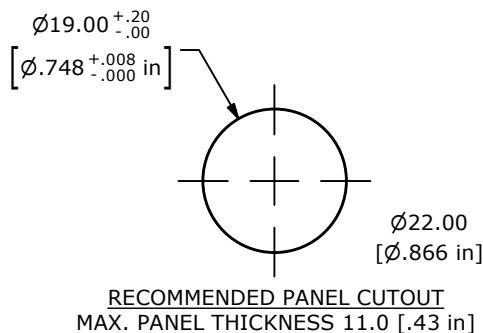


NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 2A 24VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX.
10. OPERATING TEMP.: -40°C TO +85°C
11. TRAVEL: 2.8 [.11 in]
12. ▲ DENOTES CRITICAL PARAMETER.
13. INGRESS PROTECTION: IP67
- ▲ 14. LED VOLTAGE: 2.8V
15. HARDWARE SUPPLIED: O-RING AND HEXNUT
- ▲ 16. USE P/N'S DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS

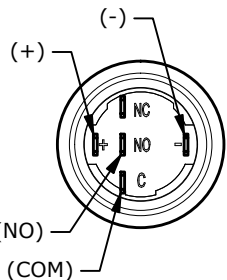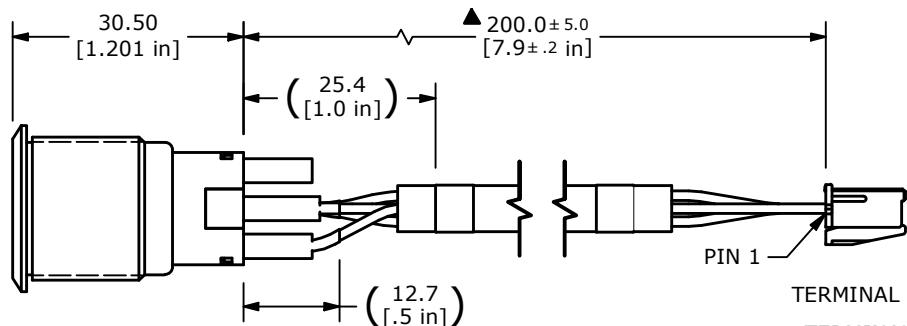

BOTTOM VIEW
SHOWN WITHOUT WIRING
AND CONNECTOR

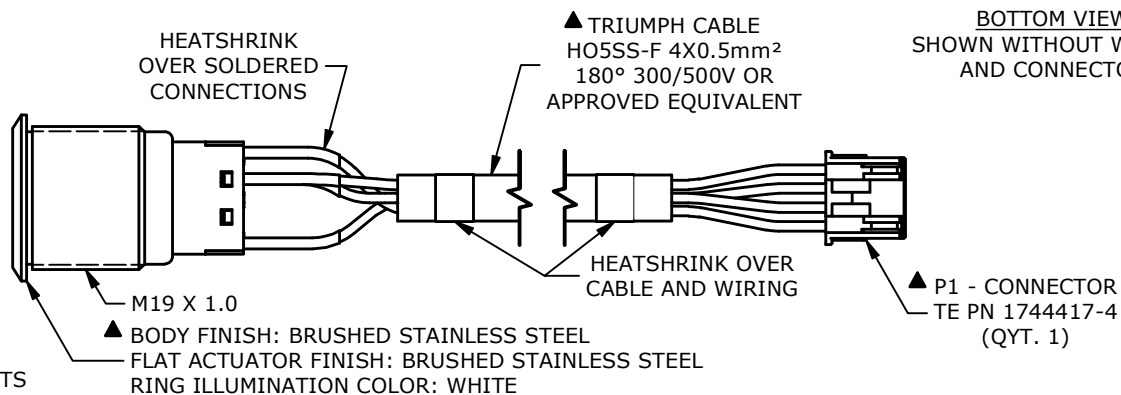

REV	ECO NO	DESCRIPTION	DATE	BY
1		Freigabe CAVI	01.07.2026	

		OBJECT ID 100132282	
		TITLE PV4F2B0BB-301-WA200MM	
SCALE 1:1	DATE 6/22/2026	DR MJR	REV A