

RRS20 SERIES ROCKER SWITCH



SPECIFICATIONS

Electrical Rating: 16(8)A, 125/250VAC ~T55 (cURs,ENEC15)
 10(4)A, 125/250VAC ~T55 (cURs,ENEC15)
 16A, 30VDC T55 (cURs,ENEC15)

Electrical Life: 10,000 Cycles

Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min. at 500VDC

Dielectric Strength: 1,500VAC for 1 minute

Ingress Protection: IP68 from panel

Panel Cutout: 20mm round cutout

Contact Arrangement: SPST, SPDT

Base Material: Nylon 66 UL94V-2

Actuator: PC/Nylon66 UL94V-2

Operating/Storage Temperature: 0°C to 55°C

FEATURES & BENEFITS

SPST and SPDT

20mm round cutout

Multiple Terminal options

Multiple Actuator options

Multiple Marking options

IP68 from panel

Soldered wire leads (300mm long) optional

Hardware included: O-Ring and 2 M20x1 Plastic Nuts

UL File #E194579

ENEC File # ENEC-05225

PART NUMBER CONFIGURATOR

Series

RRS20

Terminal

F - Quick Connect - 0.187"

S - Solder

W - Wire Leads 300mm

Function

1 - On-Off

2 - On-On

3 - On-Off-On

Rating

A - 16(8)A

125/250VAC~T55

B - 10(4)A

125/250V~T55

C - 16A

30VDC T55

Body Color

BLK - Black

Actuator Color

BLK - Black

(Non-Illum.)

WHT - White

(Illum.)

ORG - Orange

(Illum.)

GRN - Green

(Illum.)

RED - Red

(Illum.)

BLU - Blue

(Illum.)

Marking Color

N - None

BLK - Black

WHT - White

Marking Type

N - None

1 - Hi/Lo

2 - On/Off

3 - I/O Vert.

4 - I/O Horz.

5 - •

Illumination Type

N - No Lamp

1 -

100-125VAC

2 -

200-250VAC

3 - DC12V

Hardware

P - Nylon 66







B - Brass

Specifications subject to change without notice 1/8/2026



RRS20 SERIES ROCKER SWITCH - ILLUM BODY DIMENSIONS





QUICK CONNECT 0.187" TERMINAL

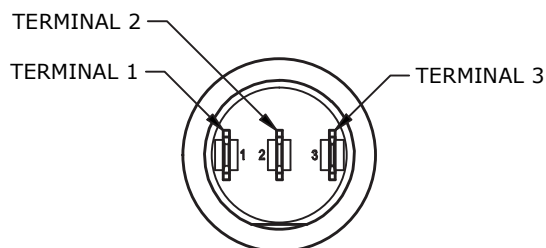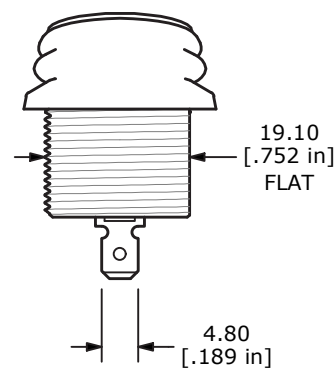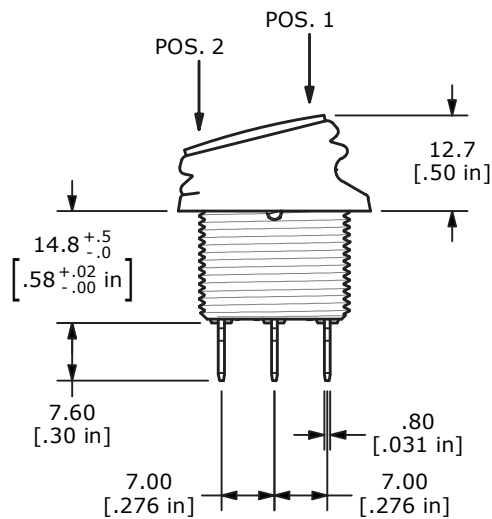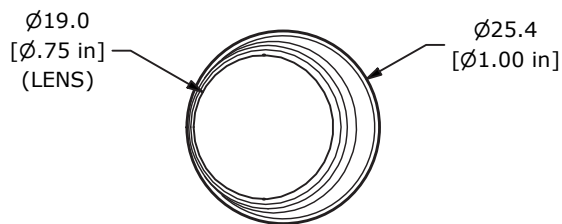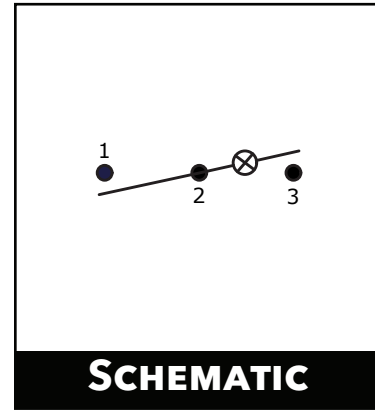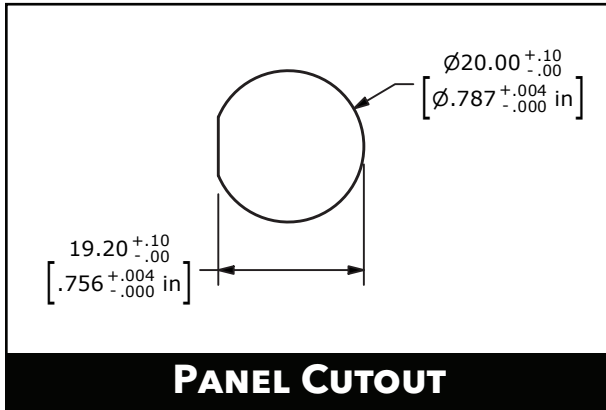



RRS20 SERIES ROCKER SWITCH - NON-ILLUM BODY DIMENSIONS

WIRED LEADS - NON-ILLUMINATED

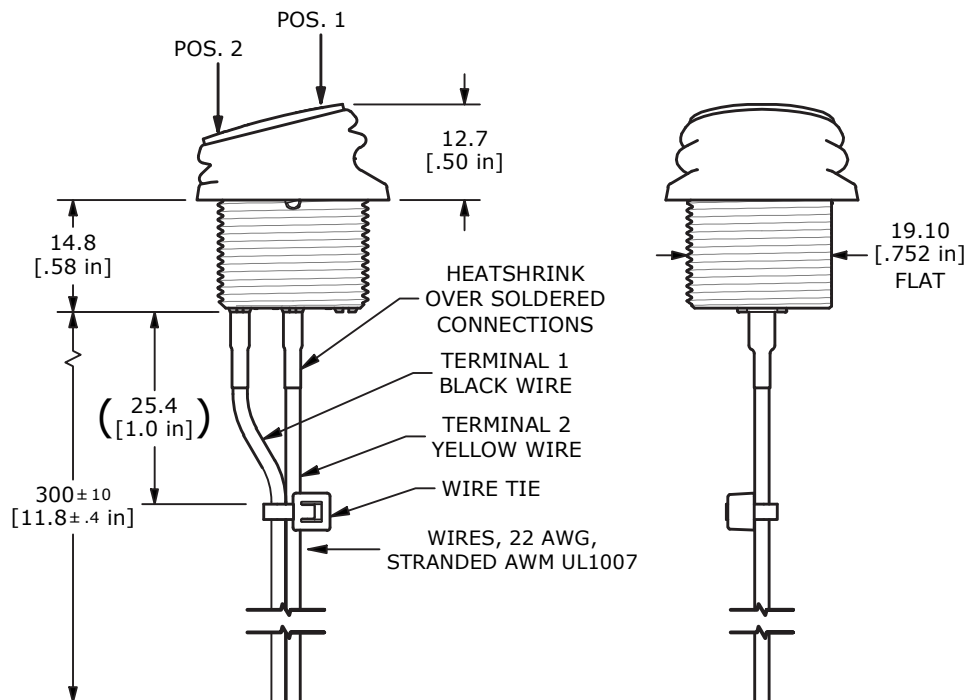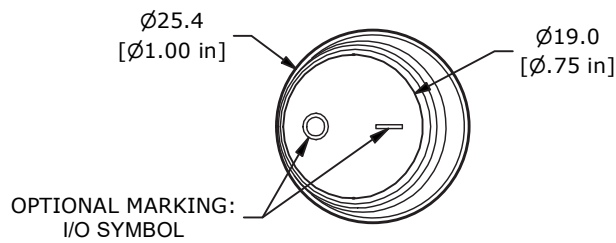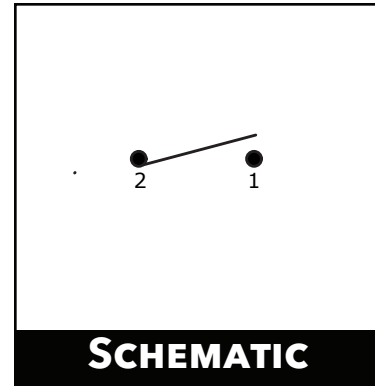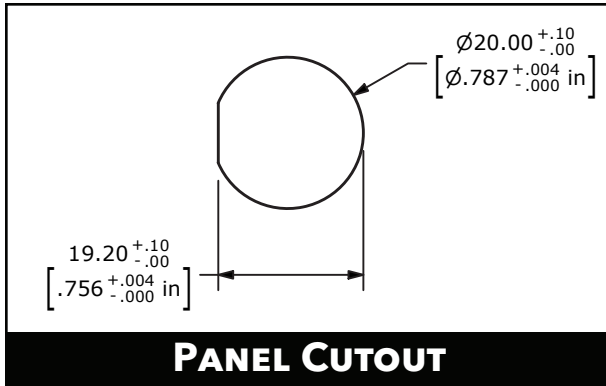



RCA1913 SERIES ROCKER SWITCH - NON-ILLUM BODY DIMENSIONS

WIRED LEADS - ILLUMINATED

